



FUSIBILI EXTRARAPIDI A BULLONE

Caratteristiche generali:

- Tipo prodotto: fusibili a coltello serie T/80;
- Tipo fissaggio: a bullone;
- Interasse di fissaggio: 80 mm;
- Tensione nominale: 690V AC;
- Dimensioni: NH-000;
- Caratteristica d'intervento: gR / aR;
- Conformi alle norme: CEI 32-1, CEI 32-7, IEC 60269-1, IEC 60269-4, DIN 43653;
- Corpo in steatite;
- Contatti in argento;
- Corrente nominale: da 10A a 315A;
- Potere di interruzione: 200kA;
- Esecuzione con indicatore superiore;
- Confezione minima: 1 pezzo;
- Omologazioni: UR;

SCREW FIXING HIGH SPEED FUSES

General characteristics:

- Product type: blade type T/80 fuses;
- Fixing type: screw fixing;
- Distance between fixing holes: 80 mm;
- Rated voltage: 690V AC;
- Dimensions: NH-000;
- Time-current characteristic: gR / aR;
- Conform to: CEI 32-1, CEI 32-7, IEC 60269-1, IEC 60269-4, DIN 43653;
- Steatite body;
- Silver plated contacts;
- Rated current: from 10A to 315A;
- Breaking capacity: 200kA;
- Fuses with upper fusion indicator;
- Minimum packaging: 1 piece;
- Approvals: UR;

Foto dei prodotti / Products images



Pagine totali del documento: 6

Document total pages: 6

Ultimo aggiornamento: 26 Gennaio 2018

Last updated: 26th January 2018




Codici e caratteristiche principali:


Codes and basic characteristics:

Grandezza Size	Codice IW IW code	In (A)	Vn (V)	Conf. Pack.
NH-000 = NH-00C	1750010	10	690	1-10
	1750016	16	690	1-10
	1750020	20	690	1-10
	1750025	25	690	1-10
	1750032	32	690	1-10
	1750040	40	690	1-10
	1750050	50	690	1-10
	1750063	63	690	1-10
	1750080	80	690	1-10
	1750100	100	690	1-10
	1750125	125	690	1-10
	1750160	160	690	1-10
	1750200	200	690	1-10
	1750250	250	690	1-10
	1750315	315	690	1-10

Drawing (dimensions in mm):

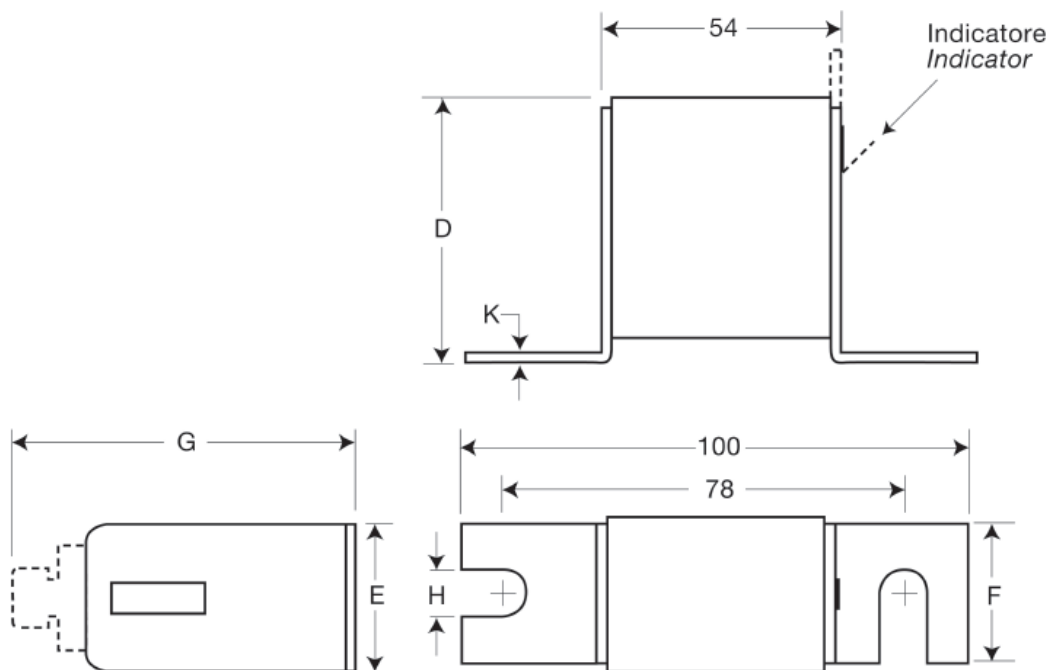


grand. - size	D	E	F	G	H	K
000	40	21	20	51	8	2
00	51	30	28	67	10	2

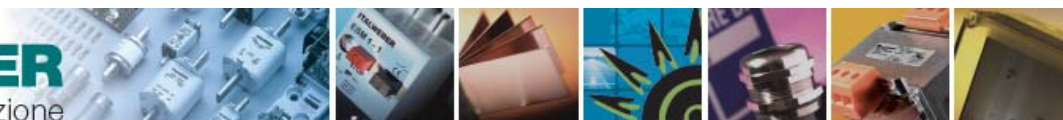

Altre caratteristiche


Other characteristics


Grandezza Size	I_n (A)	caratteristica d'intervento time-current characteristic	I_k (kA)	I_{2t} prearco (A ² s) prearcing I_{2t} (A ² s)	I_{2t} totale (A ² s) total I_{2t} (A ² s)	P_w (W)
T/80 NH-000	20	gR	200	11,5	78	7
	25	gR	200	19	130	9
	32	gR	200	40	270	10
	40	gR	200	69	460	12
	50	gR	200	115	770	15
	63	gR	200	215	1450	16
	80	aR	200	380	2550	19
	100	aR	200	695	4650	24
	125	aR	200	1200	8500	28
	160	aR	200	2300	16000	32
	200	aR	200	4200	28000	37
	250	aR	200	7750	51500	42
	315	aR	200	12000	80500	52

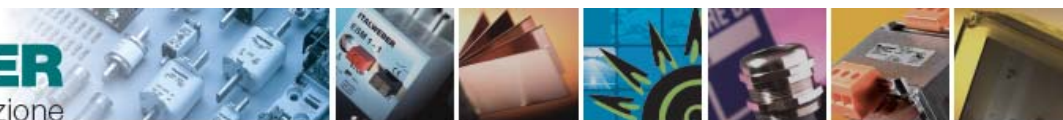

**Curve caratteristiche tempo / corrente
Tipo T/80 – NH-000**

***Time / current characteristic curves
T/80 NH-000 type***

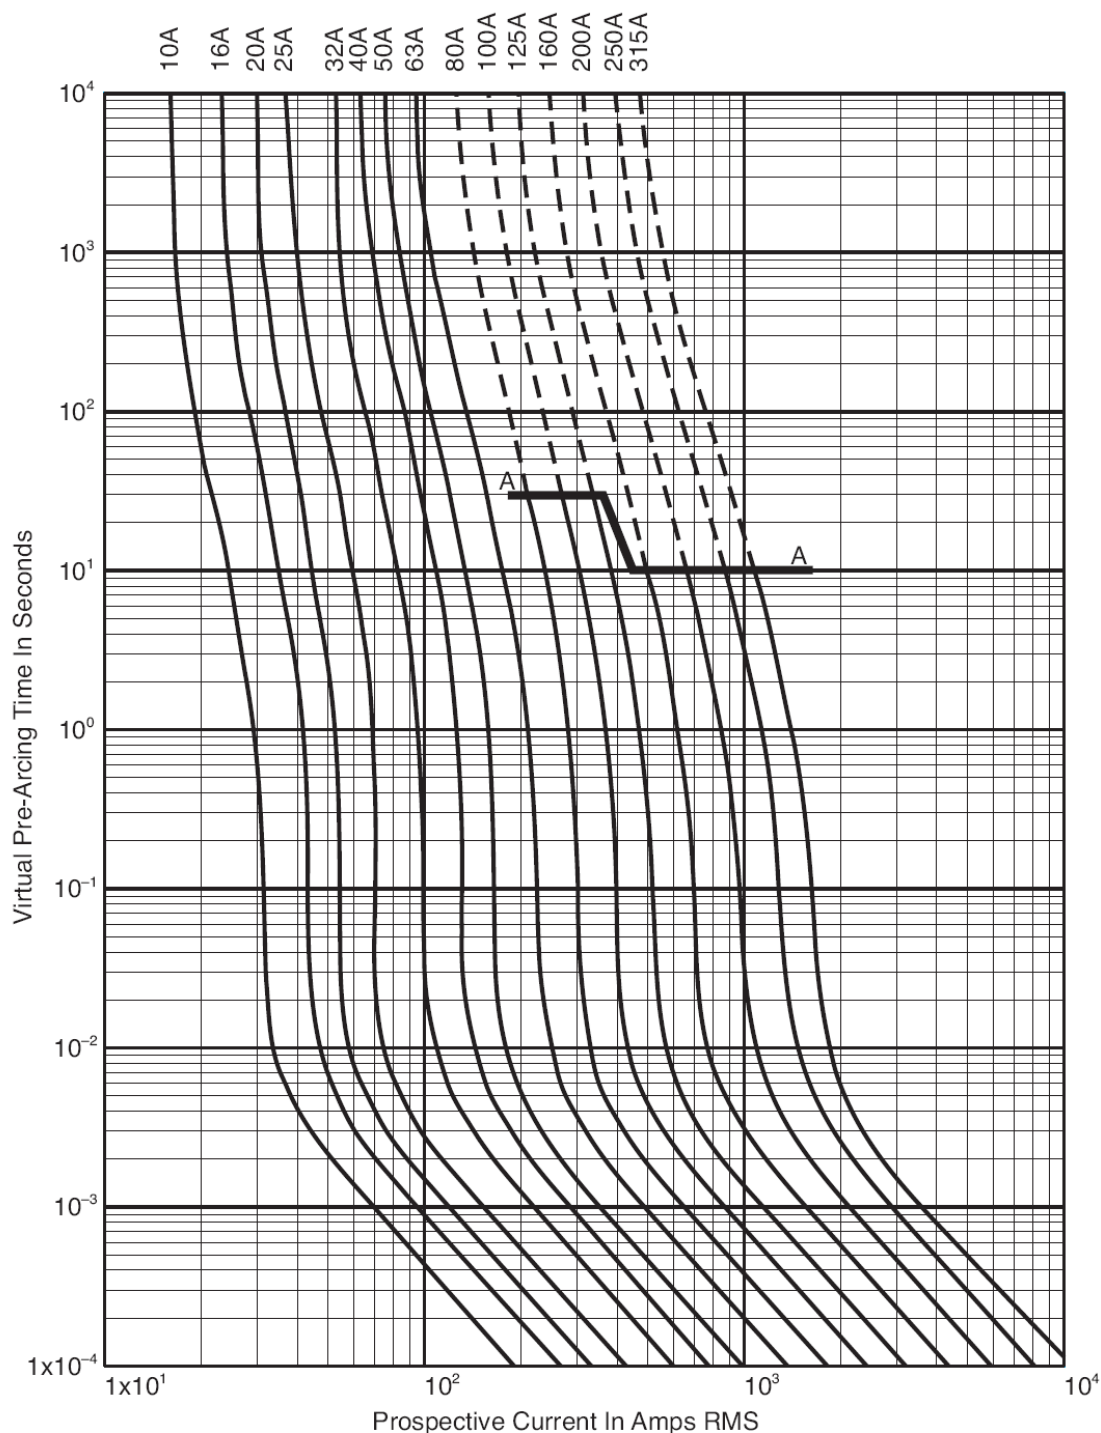

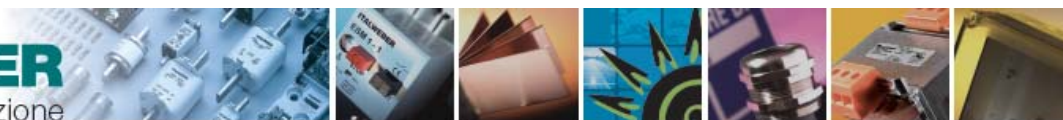

**Caratteristiche di limitazione
Tipo T/80 – NH-000**

**Cut off characteristics
T/80 NH-000 type**

