

FUSIBILI EXTRARAPIDI PER FISSAGGIO A BULLONE

Caratteristiche generali:

- Tipo prodotto: fusibili serie FWP;
- Tensione nominale: 700V AC/DC;
- Caratteristica d'intervento: extrarapida;
- Conformi alle norme: CEI 32-1, CEI 32-7, IEC 60269-1, IEC 60269-4;
- Corpo in steatite;
- Contatti in argento;
- Corrente nominale: da 20A a 1200A;
- Potere di interruzione: 200kA (250kA a 700V DC da 5A a 100A; 10kA a 700V DC oltre i 100A);
- Confezione minima: 1 pezzo;

HIGH SPEED SCREW FIXING FUSES

General characteristics:

- *Product type: FWP fuses;*
- *Rated voltage: 700V AC/DC;*
- *Time-current characteristic: high speed;*
- *Conform to: CEI 32-1, CEI 32-7, IEC 60269-1, IEC 60269-4;*
- *Steatite body;*
- *Silver plated contacts;*
- *Rated current: from 20A to 1200A;*
- *Breaking capacity: 200kA (50kA at 700V DC from 5A to 100A; 10kA at 700V DC over 100A);*
- *Minimum packaging: 1 piece;*

Foto dei prodotti / Products images




Pagine totali del documento: 6

Document total pages: 6

Ultimo aggiornamento: 27 Gennaio 2015


Last updated: 27th January 2015



Codici e caratteristiche principali:

Codes and basic characteristics:

Tipo <i>Type</i>	Codice <i>Code</i>	Descrizione <i>Description</i>	In (A)	Vn (V)	I²t totale(A²s) <i>total I²t (A²s)</i>	Pw (W)	conf. <i>pack.</i>
FWP	1776020	FWP-20B	20	700	180	6	10
	1776025	FWP-25B	25	700	340	7	10
	1776030	FWP-30B	30	700	450	9	10
	1776035	FWP-35B	35	700	160	12	5
	1776040	FWP-40B	40	700	320	12	5
	1776050	FWP-50B	50	700	600	12	5
	1776060	FWP-60B	60	700	950	15.5	5
	1776070	FWP-70B	70	700	2.000	18	1
	1776080	FWP-80B	80	700	2.400	21	1
	1776090	FWP-90B	90	700	2.700	25	1
	1776100	FWP-100B	100	700	3.500	27	1
	1776125	FWP-125A	125	700	7.300	28	1
	1776150	FWP-150A	150	700	11.700	32	1
	1776175	FWP-175A	175	700	16.700	35	1
	1776200	FWP-200A	200	700	22.000	43	1
	1776250	FWP-250A	250	700	71.200	58	1
	1776350	FWP-350A	350	700	95.600	65	1
	1776400	FWP-400A	400	700	125.000	78	1
	1776450	FWP-450A	450	700	137.000	94	1
	1776500	FWP-500A	500	700	170.000	107	1
	1776600	FWP-600A	600	700	250.000	122	1
	1776800	FWP-800A	800	700	450.000	140	1
	1776900	FWP-900A	900	700	530.000	150	1
	1776920	FWP-1000A	1000	700	600.000	170	1
	1776940	FWP-1200A	1200	700	1.100.000	190	1

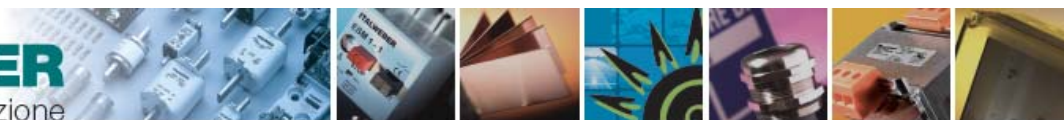

Disegno (dimensioni in mm):

Drawing (dimensions in mm):




Fig. 1

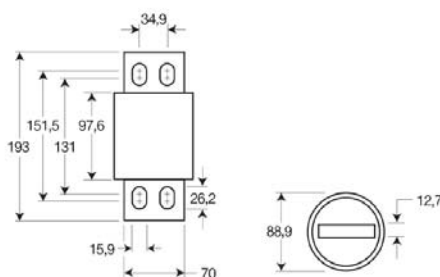


Fig. 2 900A, 1000A

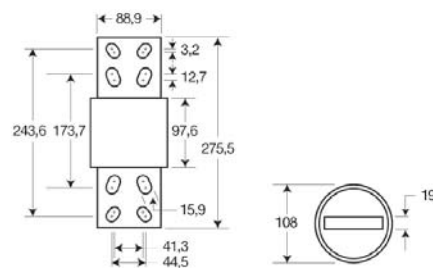



Fig. 3 1200A


fusibili - fuses	fig.	A	B	C	D	E	F	G	H	J
FWP-5/30B	1	72,9	14,3	47,1	62,9	62,9	6,4	10,3	1,6	6,4
FWP-35/60B	1	111,1	20,6	69,8	94,2	84,1	8,7	18,4	3,2	13,8
FWP-70/100B	1	111,8	24,0	65,9	92,0	90,5	8,7	19,0	3,2	9,5
FWP-125/200A	1	129,3	38,1	72,1	106,4	88,9	10,4	25,4	6,4	19,0
FWP-225/400A	1	129,3	50,8	72,1	108,7	89,7	10,4	38,1	6,4	19,8
FWP-450/600A	1	180,0	63,5	72,1	145,3	106,4	13,5	50,8	9,6	33,0
FWP-700/800A	1	168,4	50,8	72,2	141,3	128,6	15,9	38,1	6,4	22,2



Curve caratteristiche tempo / corrente


Time / current characteristic curves

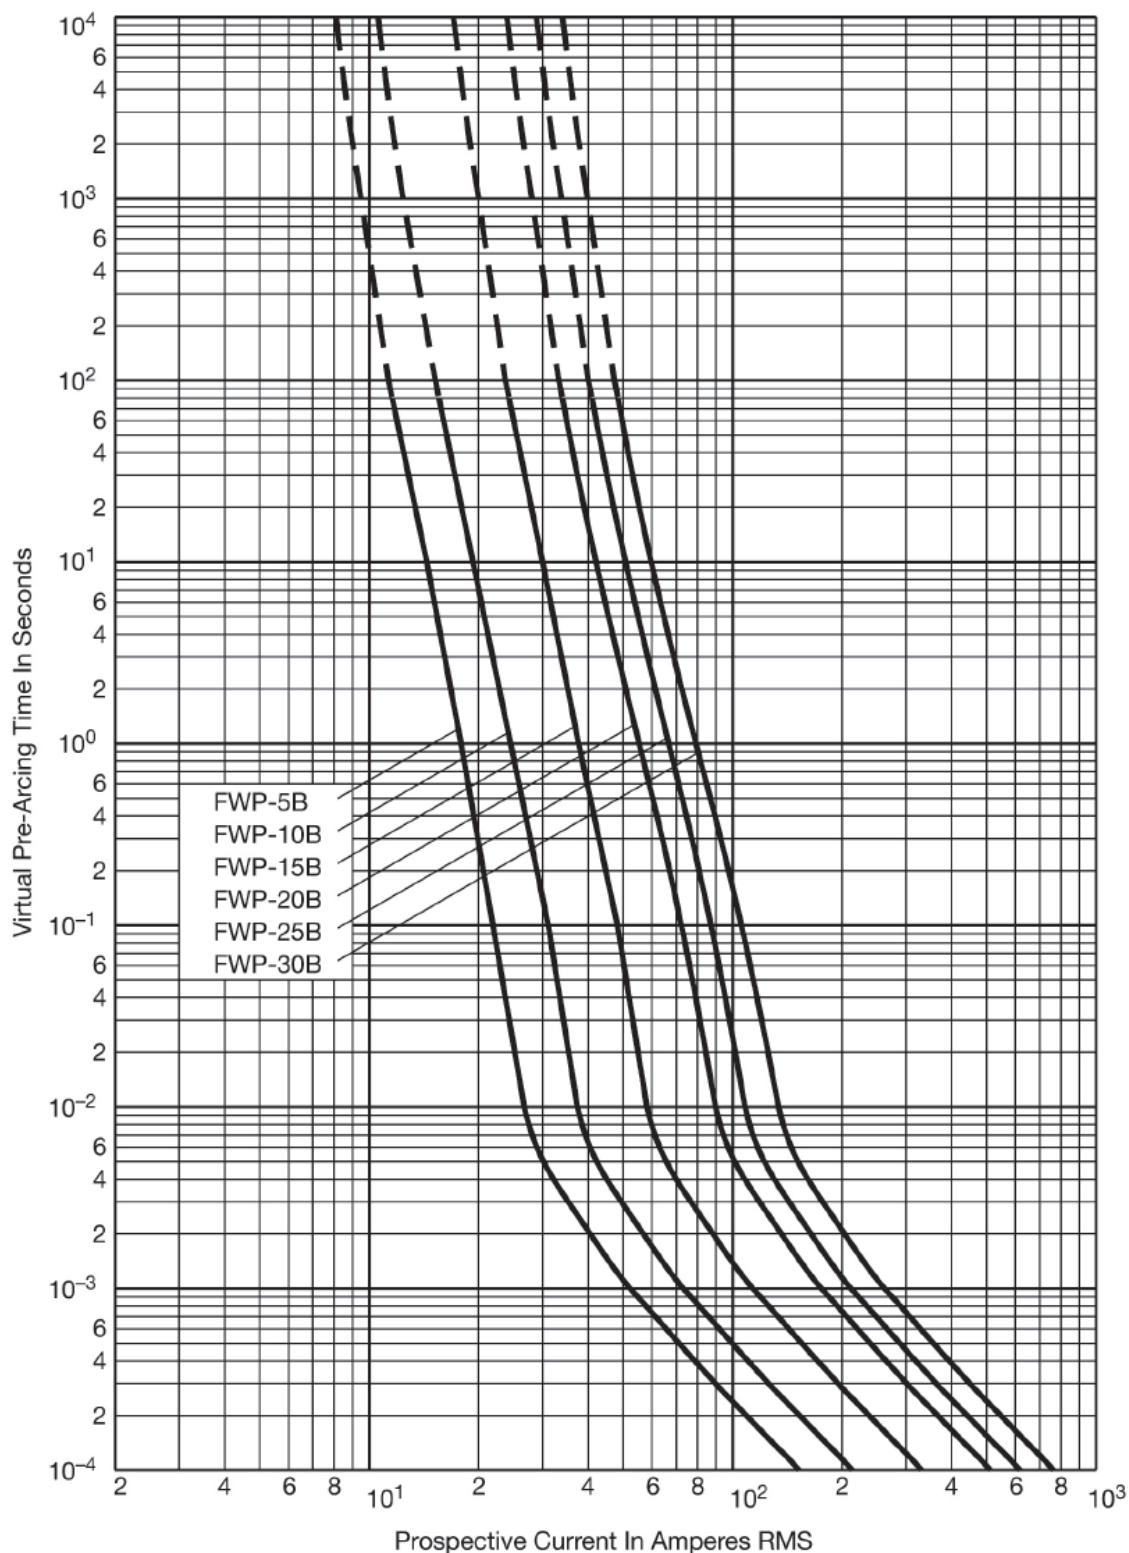


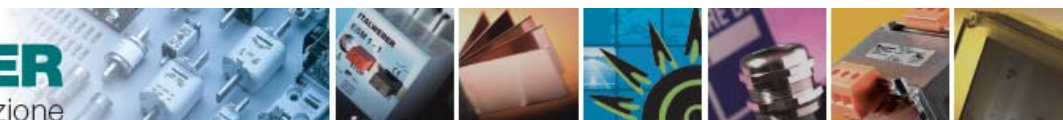

Curve caratteristiche tempo / corrente

Time / current characteristic curves

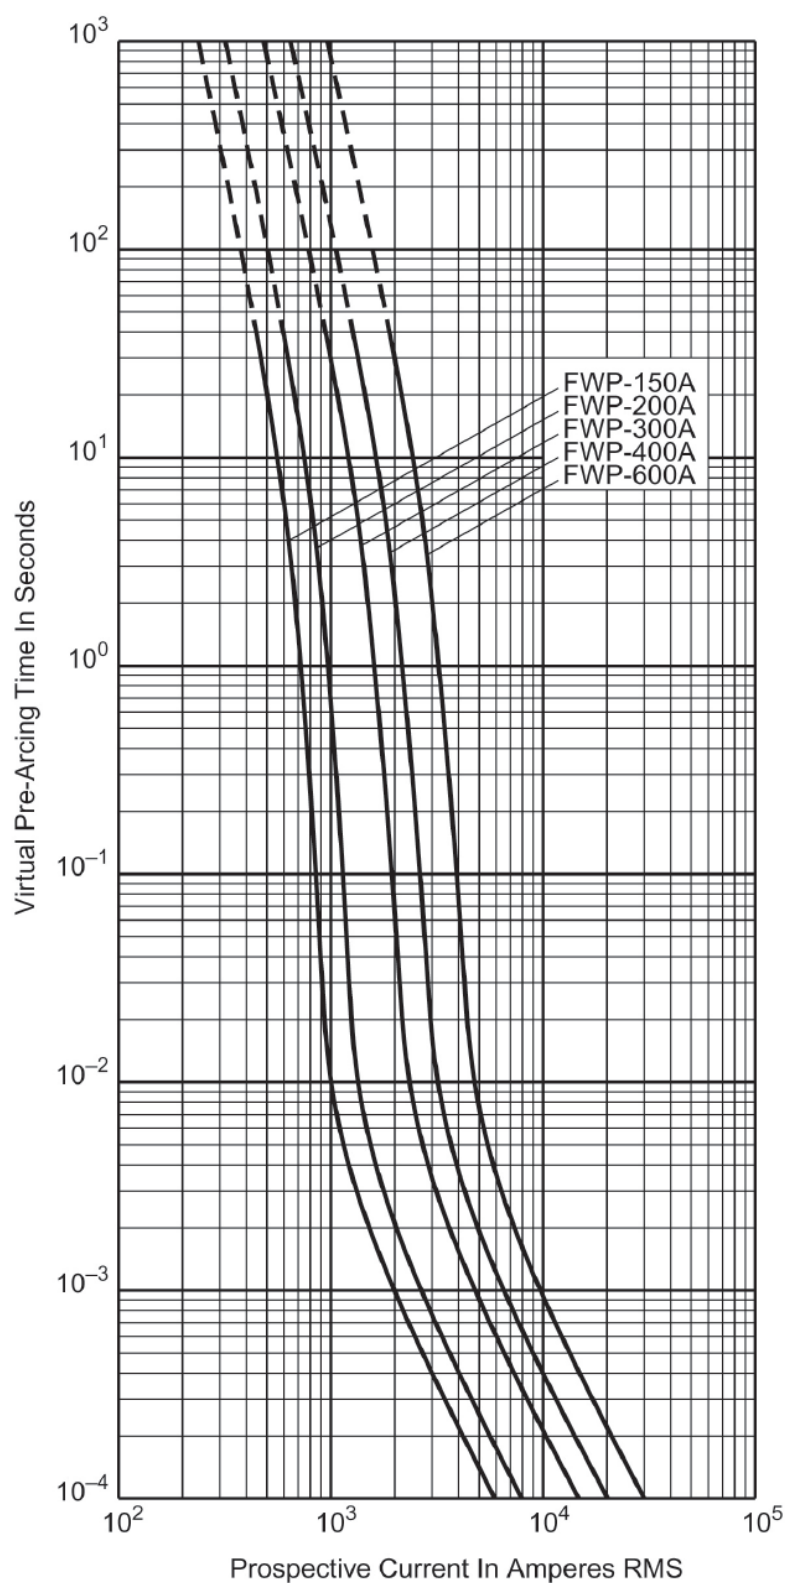

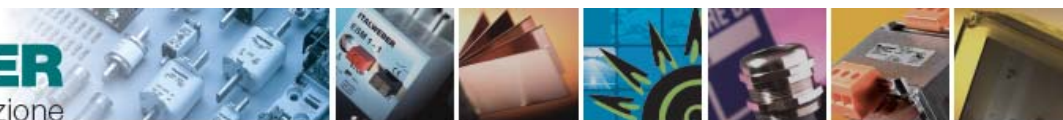

Curve caratteristiche tempo / corrente

Time / current characteristic curves

