


Not shrinkable cable protection

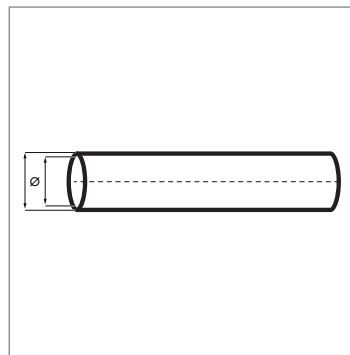

COLOR

- Black

MATERIAL

PVC

PACKAGING

Reel

CONTINUOUS OPERATING TEMPERATURE

Installation temperature:
-25°C ÷ +70°C

APPLICATIONS

- General cable protection
- Electrical insulation
- Very flexible
- Flame resistant

Technical data and packaging

CODE	DIMENSION		Wall thickness (NOM) (mm)	PACKAGING Reel (m)
	Internal diameter (mm)	Outside diameter (m)		
12370300	3	3,6	0,3	200
12370400	4	4,6	0,3	200
12370500	5	5,8	0,4	200
12370600	6	6,8	0,4	200
12370700	7	7,8	0,4	200
12370800	8	8,8	0,4	200
12370101	10	11	0,5	200
12370121	12	13	0,5	100
12370141	14	15,2	0,6	100
12370161	16	17,2	0,6	100
12370181	18	19,4	0,7	100
12370202	20	21,6	0,8	100
12370222	22	23,8	0,9	100
12370242	24	25,8	0,9	50
12370262	26	27,8	0,9	50
12370282	28	30	1	50
12370303	30	32	1	50
12370404	40	42,5	1,2	25
12370505	50	52,6	1,3	25

Technical properties

PHYSICAL PROPERTIES			
Description	Test method	Typical value	UM
Tensile strength	ISO R 527/66	160	Kg/cm ²
Elongation at break	ISO R 527/66	300	%
Hardness shore	ISO 868/85	80	Shore A
Water absorption	ASTM D 570	<0,2	%
Specific gravity	ISO 1183/87	1,39	g/cm ³

ELECTRICAL PROPERTIES			
Description	Test method	Typical value	UM
Dielectric strength	ASTM D149	13,9	kV/mm

THERMAL			
Description	Test method	Typical value	UM
Oxygen index	CEI 20-22/87	22	%
Flammability	UL94	V0	-