


POLYAMIDE BRAIDED SLEEVES

Scheda Tecnica aggiornata al **22.09.2016** / pag. 1 di 1

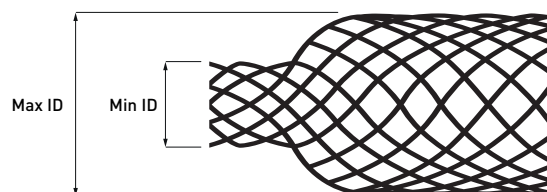

FEATURES

Extreme easy insertion
Flexible cable protection
Very resistant against abrasion
Suitable in extreme conditions

VERSIONS

● Black
● Grey

PACKAGING

Reel

MATERIALS

Polyamide 6.6

FIELD OF USE

Continuous operating temperature:
-40°C ÷ +125°C

APPROVALS / CERTIFICATIONS

DIN 5510

DIMENSIONS		PACKAGING
Minimum ID (NOM)	Max ID (NOM)	Reel
mm	mm	m
6	9	100
8	13	100
10	15	100
12	18	50
14	20	50
16	21	50
18	22	50
20	25	50
25	28	50
30	37	50
35	45	50
40	48	50

TECHNICAL PROPERTIES			
Description	Test method	Typical value	UM
Continuous temperature of use	-	-40/125	°C
Peak temperature (240h)	-	150	°C
Melting point	ISO 11357-3	260	%
Abrasion resistance	ISO 6722	21.240	cycles
Flammability	SAE J 369	self-extinguishing	-
Chemical resistance	SAE J 2192	Resists to chemicals and automotive fluids	-