


Fixing ties with screw mount head anchoring allow to fix bundles and cabling with screw mount head for fastening bundles or cable to any surface

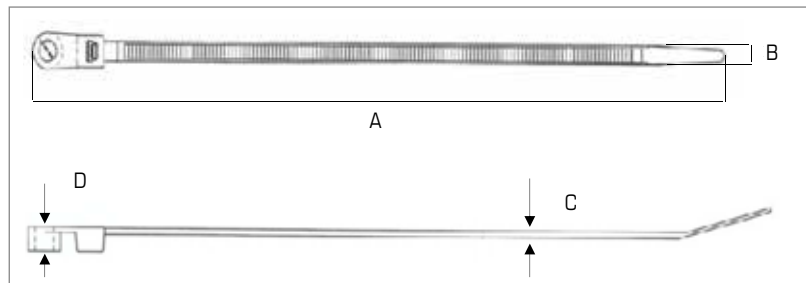

COLORS

● Natural

MATERIALS

Material: polyamide 6.6

Halogen free

Material flammability rating:

UL 94-V2

Excellent resistance to: aromatic solvents, oils, greases and derivatives

Good resistance to: bases

Limited resistance to: acids

Not resistant to: phenols and to chlorinated solvents

APPLICATION

Installation temperature:

-10°C ÷ 60°C

Working temperature:

-40°C ÷ 85°C

Technical Data

CODE	NOMINAL DIMENSIONS				Ø HOLE	BUNDLE DIAMETER	
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
Natural	A	B	C	D		ø min	ø max
52150-I	150	3,5	1,1	4,0	4,4	2,0	32,0
52200-S	200	4,5	1,3	5,4	5,4	3,5	47,0
52200-H	200	7,5	1,9	6,5	6,0	4,0	44,0
52300-H	300	7,5	1,9	6,5	6,0	4,0	75,0
52380-H	380	7,5	1,9	6,5	6,0	4,0	101,0

Mechanical features and packaging

CODE	MECHANICAL FEATURERS	PACKAGING	
	Newton (N)	(pcs)	(pcs)
Natural	Tensile strength*	Bag	Box
52150-I	130	100	10.000
52200-S	220	100	5.000
52200-H	540	100	3.000
52300-H	540	100	2.000
52380-H	540	100	2.000

*Please consider a suitable safety factor equal or above 2

PRODUCTS CONFORMITY:

CE marking: our products comply with the Low Voltage Directive 2014/35/EU and the cable ties are tested in accordance with CEI EN IEC 62275 "Cable management system – Cable ties for electrical installations".

Type 1

REACH: the materials used to produce the cable ties comply with 1907/2006/CE (REACH)