



Outside serrated cable ties with low profile head and
manufactured with UV-resistant polymer.


Tool-free installation



TYPE 1



TAE00001DU

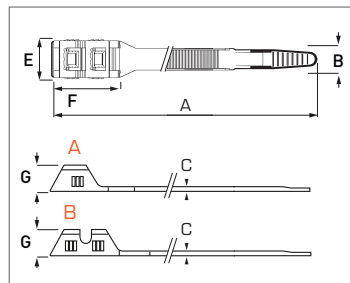

Technical Data

CODE		NOMINAL DIMENSIONS						BUNDLE DIAMETER	
Black	type	(mm) A	(mm) B	(mm) C	(mm) E	(mm) F	(mm) G	(mm) ø min	(mm) ø max
6551	A	180	8,8	1,7	14,7	25	6,7	10	38
6553	B	270	8,8	1,8	14,7	34	6,6	25	63
6555	B	360	8,8	1,8	14,7	34	6,6	25	93

COLORS

● Black

MATERIALS

Material: techno-polymer black UV stabilized and weather resistant

Halogen free

Material flammability rating:

UL 94-HB

Excellent resistance to: aromatic solvents, oils, greases and derivatives

Good resistance to: bases

Limited resistance to: acids

Not resistant to:

phenols and to chlorinated solvents

APPLICATION

Installation temperature:

-30°C ÷ 60°C

Working temperature:

-40°C ÷ 85°C

PRODUCTS CONFORMITY

CE marking: our products comply with the Low Voltage Directive 2014/35/EU and the cable ties are tested in accordance with CEI EN IEC 62275 "Cable management system – Cable ties for electrical installations".

REACH: the materials used to produce the cable ties comply with 1907/2006/CE (REACH)

PRODUCT CERTIFICATIONS



Type Approval Certificate n.
TAE00001DU (reference standard
IEC 62275; DNV Type Approval)

Mechanical features and packaging

CODE	MECHANICAL FEATURES Newton (N) Tensile strength*	PACKAGING	
		(pcs) Bag	(pcs) Box
6551	390	100	4.000
6553	560	100	2.500
6555	560	100	2.000

*Please consider a suitable safety factor equal or above 2