


Thickness 0,18mm

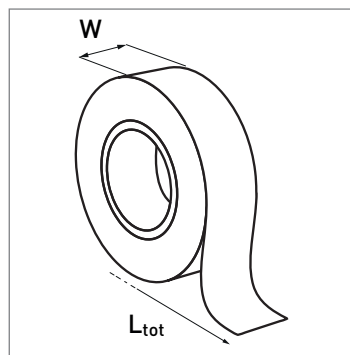

COLOR

- Black (N)

MATERIAL

PVC

PACKAGING

20 m roll

CONTINUOUS OPERATING TEMPERATURE

Installation temperature:

-18°C ÷ +90°C

APPLICATIONS

- Electrical installations
- Insulation and cable marking
- Automotive
- Identification

APPROVALS

CEI EN 60454-3-1



VDE n. 40039640

Technical data and packaging

CODE	DIMENSIONS		PACKAGING	
	Width (mm) W	Length (m) L_m	Rolls per tower pcs	Rolls per pack pcs
N106X	19	20	10	120

Technical properties

Description	Test method	Typical value	UM
Thickness	ASTM D-1000	0,18	mm
Adhesion to steel	EN 60454	1,8	N/cm
Adhesion to backing	EN 60454	1,5	N/cm
Flammability	EN 60454	self-extinguishing	-
Elongation at break	EN 60454	Min 125	%
Tensile strength	EN 60454	27	N/cm
Dielectric breakdown	EN 60454	7	kV