




Thickness 0,15mm

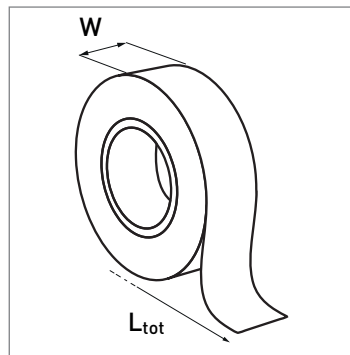

COLOR

- Black (N)
- Green/yellow stripes (T)
- White (BI)
- Red (R)
- Grey (GR)
- Blue (BL)
- Yellow (GI)
- Brown (M)

MATERIAL

PVC

PACKAGING

10 m roll
25 m roll

CONTINUOUS OPERATING TEMPERATURE

Installation temperature:

0°C ÷ +90°C

APPLICATIONS

- Electrical installations
- Insulation and cable marking
- Automotive
- Identification

APPROVALS

CEI EN 60454-3-1



VDE n. 40039640

Technical data and packaging

CODE	DIMENSIONS		PACKAGING	
	Width (mm) W	Length (m) Ltot	Rolls per tower pcs	Rolls per pack pcs
NI14X	15	10	10	200
NI16X	19	25	10	120
NI18X	25	25	8	96

Specify the colour X using the codes (see VERSIONS)

Technical properties

Description	Test method	Typical value	UM
Thickness	ASTM D-1000	0,15	mm
Adhesion to steel	EN 60454	1,8	N/cm
Adhesion to backing	EN 60454	1,5	N/cm
Flammability	EN 60454	self-extinguishing	-
Elongation at break	EN 60454	Min 125	%
Tensile strength	EN 60454	27	N/cm
Dielectric breakdown	EN 60454	Min 6	kV