

79104200	<b>DATA SHEET</b>	
Valid from: 18.09.2018	<b>EPIC® H-B 16 TSH-RO</b>	

## Description

- The housing standard.
- Wide choice for all applications.



## General Characteristics

Series	H-B 16
Version	Hood M25/ M32 (Article 79104400)/ M40 (Article 79104800)
Locking	Bolts with plastic rollers for single lever
Gland body	No
Cable entry	Side
Protection (DIN EN 60529)	IP 65 (latched)
Protection (NEMA 250, UL50E)	12 (latched)
Temperature Range	-40°C to +100°C, short term up to +125°C

## Materials and Surfaces

Housing	Aluminium alloy, powder-coated, grey
Bolt with reels	Heat-treatable steel, zinc-plated/ PA

## Approvals

VDE-Approval, VDE-REG.-Nr.	B437
----------------------------	------



## Standard

Safety Standard	IEC 61984
-----------------	-----------

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB79104200EN Version: 01	Page 1 of 2
---	---------------------------------------	-------------

79104200	<b>DATA SHEET</b>	
Valid from: 18.09.2018	EPIC® H-B 16 TSH-RO	

## Technical Drawings

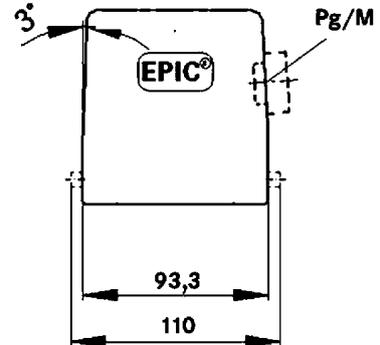

Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

### Info

Universal, robust metal housings size H-B 16

### Application range

Plant engineering  
Light & sound technology  
Plastics industry

### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB79104200EN Version: 01	Page 2 of 2
---	---------------------------------------	-------------