# Valid from: SILVYN® SP



SILVYN® SP is a dimensionally stable cable protective tube off soft PVC with a integrated hard PVC spiral. The inner site of the tube is smooth, so that the cable and wires can easy thread in.

The protective tube can use for bonding and guiding of cables and wires at the machine- and vehicle construction and as a protection and isolation.



Material:

03.07.2018

Coat soft PVC Spiral hard PVC

**Technical features:** 

Surface Smooth
Profile Spiral wounded
Nominal size NW 14 up to NW 56
Protection class IP67 acc. to EN 60529
Depending on the used conduit gland

Temperature range -15°C up to +60°C

Additional features:

Self-extinguishing

Color: Silver-grey, RAL 7001

Approbation:

Reference standards: IEC 61386-1

Suitable glands:

SILVYN® SSV

SILVYN® SSV-M

SILVYN® SSVZ

SILVYN® SSVZ-M

SILVYN® USK

SILVYN® USK-M

Creator: MAAU1/PDP Document: DB61714000EN Page 1 of 2

SILVYN® SCH

### 6171 4000


## **DATA SHEET**

Valid from: 03.07.2018

SILVYN® SP



## **Product drawing:**

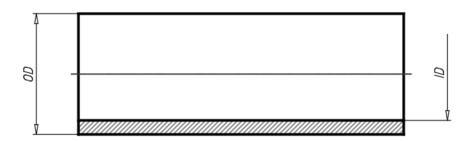

#### **Dimension table:**

Part No.	Nominal width NW	Diameter mm		Bending radius
		ID	OD	mm
6171 4000	14	10,0	14,0	50
6171 4010	16	12,0	16,0	60
6171 4020	18	14,0	18,0	70
6171 4100	20	16,0	20,0	70
6171 4110	27	22,0	27,0	90
6171 4120	36	30,0	36,0	140
6171 4070	44	38,0	44,0	190
6171 4090	56	49,0	56,0	224

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: MAAU1/PDP	Document: DB61714000EN	Daga 2 of 2
Released: DAMU1/PDP	Version: 03	Page 2 of 2