



BOX40T



BOX50T



BOX60T



**BOX80T
BOX90T***

Caratteristiche Costruttive

Realizzati con feritoie per facilitare la ventilazione
Predisposti per inserimento ventola di raffreddamento
Maniglia di Sollevamento
(modelli BOX40T-BOX50T-BOX60T)
Traverse Inferiori per fissaggio Box a Pavimento
(modelli BOX60T-BOX80T-BOX90T-BOX100AR-BOX125AR)
Flangia Removibile
(modelli BOX90T-BOX100AR-BOX125AR)
Pannellatura sbullonabile per lavorazione

Caratteristiche Tecniche

Grado di protezione IP21
Lamiera di acciaio spessore 20/10
Verniciatura a polvere essicata in forno
Colore Verniciatura Box : RAL7035
Colore Verniciatura Box (variabile su richiesta)

Norme di riferimento Reference standards

EN 60529

RAL7035




General Characteristics

Made with slits to facilitate ventilation
Prepared for insertion of cooling fan
Lifting handle
(model BOX40T-BOX50T-BOX60T)
Lower cross beams for fixing Box to Floor
(model BOX60T-BOX80T-BOX90T-BOX100AR-BOX125AR)
Removable and workable flange
(modelli BOX90T-BOX100AR-BOX125AR)
Unboltable paneling for processing

Technical Features

Degree of protection IP21
20/10 thick steel sheet
Powder coating dried in the oven
Box painting color: RAL7035
Box paint color (variable on request)

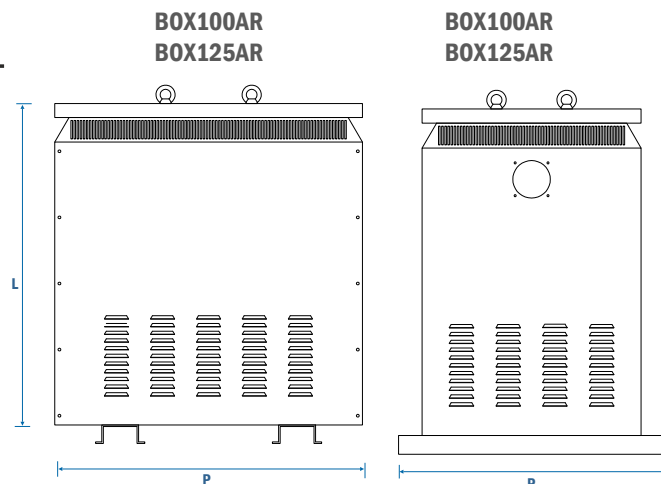

CODICE CODE (Art.)	MOVIMENTAZIONE HANDLING	ACCESSORI ACCESSORIES		PESO WEIGHT (KG)	DIMENSIONI (mm) DIMENSIONS (mm)		
					(L)	(P)	(H)
BOX40T	N.1 MANIGLIA HANDLE	N.2 PRESSACAVI CABLE GLANDS	PG 13.5 PG 13.5	4,0	300	220	300
BOX50T	N.2 MANIGLIE HANDLES	N.2 PRESSACAVI CABLE GLANDS	PG 16 PG 16	5,5	380	250	380
BOX60T	N.2 MANIGLIE HANDLES	N.2 PRESSACAVI CABLE GLANDS	PG 36 PG 36	14,0	470	400	590
BOX80T	TRAVERSE INFERIORI LOWER CROSSES	N.2 PRESSACAVI CABLE GLANDS	PG 36 PG 36	22,0	600	450	700
BOX90T	TRAVERSE INFERIORI LOWER CROSSES	*FLANGIA REMOVIBILE E LAVORABILE *REMOVABLE AND WORKABLE FLANGE		40,0	700	550	750
BOX100AR	TRAVERSE INFERIORI LOWER CROSSES	FLANGIA REMOVIBILE E LAVORABILE REMOVABLE AND WORKABLE FLANGE		55,0	900	800	900
BOX125AR	TRAVERSE INFERIORI LOWER CROSSES	FLANGIA REMOVIBILE E LAVORABILE REMOVABLE AND WORKABLE FLANGE		65,0	950	900	1000