



Disponibile su richiesta
Staffa di fissaggio Guida DIN <150VA

Available on request
Fixing bracket DIN rail <150VA

Caratteristiche Costruttive

Esecuzione a giorno (da incorporare)
Impregnazione totale in vernice termoindurente
Lamierino a basse perdite
Squadrette di fissaggio conformi a norme DIN 41307
Equipaggiamento per il collegamento di terra
Grado di Protezione IP00
Classe Isolamento Termica F
Classe Elettrica di protezione I
Connessioni primario su morsetti da 2,5 - 4 mm²
Connessioni secondario in morsetti fino a 2 x 95mm²

Caratteristiche Tecniche

Tensione Primaria: 0.230.400V
Tensione Secondaria:
24V (12.0.12V) (piena potenza)
12V (0.12V) (metà potenza)
Frequenza: 50-60Hz
Temperatura ambiente max: 40°C

Norme di riferimento

EN 61558-1
EN 61558-2-2
EN 61558-2-6



12VAC

META' POTENZA

24VAC

PIENA POTENZA

General Characteristics


Open execution
Total impregnated with thermosetting varnish
Low losses magnetic sheet steel
Fastening brackets compliant DIN 41307
Equipped for ground connection
Protection degree IP00
Thermal Insulation class F
Electric class protection I
Primary connections on terminals 2,5 - 4 mm²
Secondary connections on terminals 2x95 mm²

Technical Features

Primary Voltage: 0.230.400V
Secondary Voltage:
24V (12.0.12V) (full power)
12V (0.12V) (half power)
Frequency: 50-60Hz
Max ambient temperature: 40°C

Reference standards

EN 61558-1
EN 61558-2-2
EN 61558-2-6

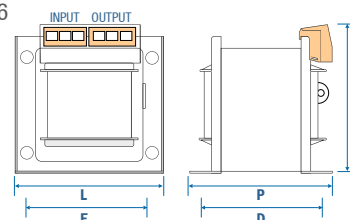

CODICE CODE	POTENZA POWER	PERDITE A VUOTO NO-LOAD LOSSES	PERDITE IN C.C. S.C.LOSSES	VCC on 400V.	PESO WEIGHT	DIMENSIONI (mm) DIMENSIONS (mm)					BOX TIPO TYPE BOX
(Art.)	(VA)	(W)	(W)	(%)	(KG)	(L)	(P)	(H)	(E)	(D)	(CODE)
Q003C24	30	3	4	12	1,0	77	80	78	56	42	/
Q005C24	50	5	5	10	1,2	77	85	78	56	47	/
Q007C24	75	7	9	10	1,5	86	85	85	70	47	/
Q010C24	100	7	10	11	1,6	86	85	85	70	47	/
Q015C24	150	8	19	12,5	2,1	86	95	85	70	57	/
Q020C24	200	10	23	10,5	2,5	99	95	95	80	64	/
Q025C24	250	12	25	9,0	2,9	99	105	95	80	74	/
Q030C24	300	13	22	6,3	4,0	120	90	108	100	71	/
Q040C24	400	14	22	5,7	4,4	120	95	108	100	76	/
Q050C24	500	15	27	5,6	5,3	120	105	108	100	86	/
Q065C24	650	20	33	4,4	7,7	152	130	160	125	103	/
Q080C24	800	24	35	4,0	11,5	152	160	160	125	133	/
Q100C24	1000	29	45	3,7	12,2	152	170	160	125	143	/
Q150C24	1500	40	65	3,0	16,6	196	155	192	168	121	/
Q200C24	2000	55	75	3,0	21,0	196	175	192	168	140	BOXLORC-1
Q300C24	3000	50	110	4,0	27,0	240	210	280	200	126	BOXLORC-2
Q400C24	4000	65	135	3,5	36,0	240	240	280	200	156	BOXLORC-2

Dati indicativi (le caratteristiche tecniche possono subire variazioni in base ai criteri dell'ufficio Ricerca e Sviluppo)
Indicative values (the technical information may vary according to the R&D criteria)