




Trasformatori Monofase di Sicurezza Doppio Isolamento

Single-phase Double Isolation Safety Transformers



Caratteristiche Costruttive

Esecuzione a giorno (da incorporare)
Impregnazione totale in vernice termoindurente
Lamierino a basse perdite
Squadrette di fissaggio conformi a norme DIN 41307
Equipaggiamento per il collegamento di terra
Grado di Protezione IP00
Classe Isolamento Termica F
Classe Elettrica di protezione II
Connessioni primario su morsetti da 2,5 - 4 mm²
Connessioni secondario su capocorda
Flangia intermedia

Caratteristiche Tecniche

Tensione Primaria: 0.230V
Tensione Secondaria: 0.12V
Frequenza: 50-60Hz
Temperatura ambiente max: 40°C

Norme di riferimento

EN 61558-1
EN 61558-2-6



12VAC

INSTALLAZIONE USO CIMITERIALE CEMETERY USE INSTALLATION

INSTALLAZIONE FARI PISCINA SWIMMING POOL LIGHTS INSTALLATION

General Characteristics


Open execution
Total impregnated with thermosetting varnish
Low losses magnetic sheet steel
Fastening brackets compliant DIN 41307
Equipped for ground connection
Protection degree IP00
Thermal Insulation class F
Electric class protection II
Primary connections on terminals 2,5 - 4 mm²
Secondary connections on cable lugs
Intermediate flange

Technical Features

Primary Voltage: 0.230V
Secondary Voltage: 0.12V
Frequency: 50-60Hz
Max ambient temperature: 40°C

Reference standards

EN 61558-1
EN 61558-2-6

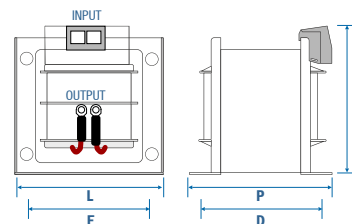

CODICE CODE	POTENZA POWER	PERDITE A VUOTO NO-LOAD LOSSES	PERDITE IN C.C. S.C. LOSSES	PESO WEIGHT	DIMENSIONI (mm) DIMENSIONS (mm)		
(Art.)	(VA)	(W)	(W)	(KG)	(L)	(P)	(H)
TS010A12	100	6	8	2	80	90	90
TS020A12	200	9	15	4	100	100	100
TS030A12	300	11	18	6	125	110	120
TS040A12	400	12	20	7	125	120	120
TS050A12	500	12	22	9	125	140	120
TS065A12	650	16	28	10	155	160	150
TS080A12	800	20	30	12	155	170	150
TS100A12	1000	25	40	14	155	180	150
TS150A12	1500	35	55	20	195	200	190
TS200A12	2000	45	60	24	195	210	190
TS300A12	3000	50	90	33	195	250	190
TS400A12	4000	55	110	38	245	280	230

Dati indicativi (le caratteristiche tecniche possono subire variazioni in base ai criteri dell'ufficio Ricerca e Sviluppo)
Indicative values (the technical information may vary according to the R&D criteria)