



Trasformatori Monofase di Sicurezza Doppio Isolamento

Single-phase Double Isolation Safety Transformers

Caratteristiche Costruttive

Esecuzione a giorno (da incorporare)
Impregnazione totale in vernice termoindurente
Lamierino a basse perdite
Squadrette di fissaggio conformi a norme DIN 41307
Equipaggiamento per il collegamento di terra
Grado di Protezione IP00
Classe Isolamento Termica F
Classe Elettrica di protezione II
Connessioni primario su morsetti da 2,5 - 4 mm²
Connessioni secondario su capocorda
Flangia intermedia

Caratteristiche Tecniche

Tensione Primaria: 0.230V
Tensione Secondaria: 0.24V
Frequenza: 50-60Hz
Temperatura ambiente max: 40°C

Norme di riferimento

EN 61558-1
EN 61558-2-6



24VAC

INSTALLAZIONE USO CIMITERIALE CEMETERY USE INSTALLATION

INSTALLAZIONE FARI PISCINA SWIMMING POOL LIGHTS INSTALLATION

General Characteristics


Open execution
Total impregnated with thermosetting varnish
Low losses magnetic sheet steel
Fastening brackets compliant DIN 41307
Equipped for ground connection
Protection degree IP00
Thermal Insulation class F
Electric class protection II
Primary connections on terminals 2,5 - 4 mm²
Secondary connections on cable lugs
Intermediate flange

Technical Features

Primary Voltage: 0.230V
Secondary Voltage: 0.24V
Frequency: 50-60Hz
Max ambient temperature: 40°C

Reference standards

EN 61558-1
EN 61558-2-6

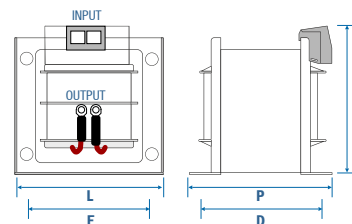

CODICE CODE	POTENZA POWER	PERDITE A VUOTO NO-LOAD LOSSES	PERDITE IN C.C. S.C. LOSSES	PESO WEIGHT	DIMENSIONI (mm) DIMENSIONS (mm)		
(Art.)	(VA)	(W)	(W)	(KG)	(L)	(P)	(H)
TS010A24	100	6	8	2	80	90	90
TS020A24	200	9	15	4	100	100	100
TS030A24	300	11	18	6	125	100	120
TS040A24	400	12	20	7	125	110	120
TS050A24	500	12	22	9	125	130	120
TS065A24	650	16	28	10	155	150	150
TS080A24	800	20	30	12	155	160	150
TS100A24	1000	25	40	14	155	170	150
TS150A24	1500	35	55	20	155	200	190
TS200A24	2000	45	60	24	195	240	190
TS300A24	3000	50	90	33	195	240	190
TS400A24	4000	55	110	38	245	270	230

Dati indicativi (le caratteristiche tecniche possono subire variazioni in base ai criteri dell'ufficio Ricerca e Sviluppo)
Indicative values (the technical information may vary according to the R&D criteria)