


Stehleuchten | 220-240 V | 1xE27
12102



Ø 380

Technische Daten	
Typ	Stehleuchten
Installationsposition	Boden
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Nein
Anschluss der Leuchte	1 x E27
Light emission direction	upward
Frequency	50-60 Hz
Optik	Diffuses
Isolierklasse	2
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Steckdose	Type C
Kabellänge	2 m
Harzbeschichtung	Nein
Nettogewicht	1.675 Kg

Oberfläche Oberfläche diffusor	
Material	PE
Farbe	Natural polyethilene
Oberfläche Oberfläche fassung	
Material	PC
Farbe	Weiß

Stehleuchten | 220-240 V | 1xE27
12102

Single emission floor lamp for indoor application. Compatibility: LED lamp; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish.


The ingress protection degree is IP20; the total weight is of 1.675 kg.

The power supply cable is included and features a 2 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	79 %
Leuchten Lichtstrom	555 lm
Consumption	46 W
Leuchten Lichtausbeute	15 lm/W
Verbindungstemperatur (Leuchte)	80
Lichtstrom (Lichtquelle)	1 x lm
OPTICAL	
Optik C0/C180	180°
Light distribution simmetry	Symmetrical

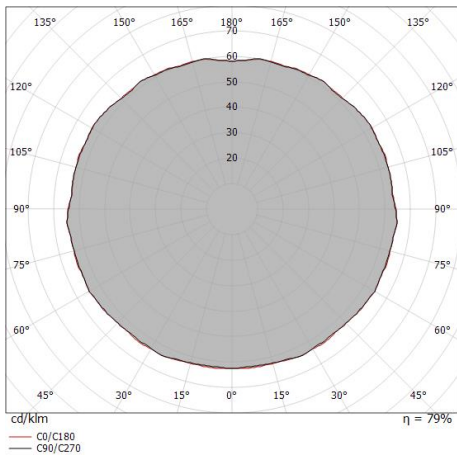

Stehleuchten | 220-240 V | 1xE27

12102

Single emission floor lamp for indoor application. Compatibility: LED lamp; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish.

The ingress protection degree is IP20; the total weight is of 1.675 kg.

The power supply cable is included and features a 2 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.