


Pendelleuchte | 220-240 V | 1xE27
12213



Technische Daten	
Typ	Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Nein
Anschluss der Leuchte	1 x E27
Light emission direction	downward
Frequency	50-60 Hz
Optik	Diffuses
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2.5 m
Harzbeschichtung	Nein
Nettogewicht	1.91 Kg

Oberfläche Oberfläche Gehäuse	
Material	PC
Farbe	Weiß
Oberfläche Oberfläche diffusor	
Material	PE
Farbe	Natural polyethilene
Oberfläche Oberfläche fassung	
Material	Eisen
Farbe	Weiß RAL 9010
Bearbeitungstyp	Lackierung
Cables Electrification+suspension	
Max. Kabellänge	2500 mm

Pendelleuchte | 220-240 V | 1xE27
12213

Double emission pendant luminaires for indoor application. Compatibility: LED lamp; lamp cap 1xE27.

The device body is made of PC and features a white finish; the diffuser is made of pe; the mounting frame is made of iron, with a white ral 9010 finish, processed by means of coating.


The ingress protection degree is IP20; the total weight is of 1.91 kg.

The power supply cable is included and features a 2.5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	88 %
Leuchten Lichtstrom	360 lm
Consumption	30 W
Leuchten Lichtausbeute	13 lm/W
Verbindungstemperatur (Leuchte)	80
Lichtstrom (Lichtquelle)	1 x lm
UGR	
UGR axial	11.2
UGR transversal	11.2
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	176°
Light distribution simmetry	Symmetrical

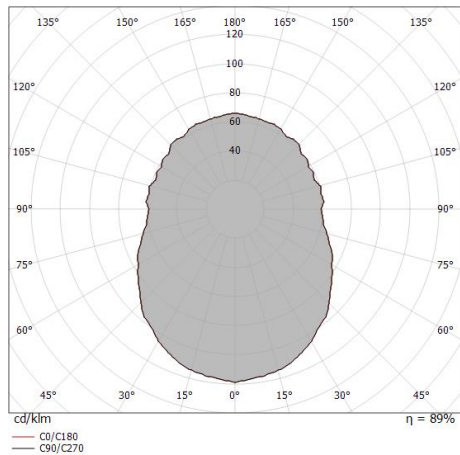

0.5	28.64	E(0°) E(C0)	88.0°	193 0
1.0	57.27	E(0°) E(C0)	88.0°	48 0
1.5	85.91	E(0°) E(C0)	88.0°	21 0
2.0	114.55	E(0°) E(C0)	88.0°	12 0
2.5	143.18	E(0°) E(C0)	88.0°	8 0
3.0	171.82	E(0°) E(C0)	88.0°	5 0
Distance [m] Cone diameter [m]		Illuminance [lx]		
— C0/C180 (Half-peak divergence: 176.0°)				

Pendelleuchte | 220-240 V | 1xE27

12213

Double emission pendant luminaires for indoor application. Compatibility: LED lamp; lamp cap 1xE27.

The device body is made of PC and features a white finish; the diffuser is made of pe; the mounting frame is made of iron, with a white ral 9010 finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 1.91 kg.

The power supply cable is included and features a 2.5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.