


Stehleuchten | 220-240 V | 1xE27
12215



Ø 380

Technische Daten	
Typ	Stehleuchten
Installationsposition	Boden
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Nein
Anschluss der Leuchte	1 x E27
Light emission direction	upward
Frequency	50-60 Hz
Optik	Diffuses
Isolierklasse	2
IP	IP20
IK	IK10
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2 m
Harzbeschichtung	Nein
Nettogewicht	1.715 Kg

Oberfläche Oberfläche diffusor	
Material	PE
Farbe	Natural polyethilene
Oberfläche Oberfläche fassung	
Material	PC
Farbe	Weiß

Stehleuchten | 220-240 V | 1xE27
12215

Single emission floor lamp for indoor application. Compatibility: LED lamp; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish.


The ingress protection degree is IP20; the total weight is of 1.715 kg.

The power supply cable is included and features a 2 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	88 %
Leuchten Lichtstrom	360 lm
Consumption	30 W
Leuchten Lichtausbeute	13 lm/W
Verbindungstemperatur (Leuchte)	80
Lichtstrom (Lichtquelle)	1 x lm
UGR	
UGR axial	11.2
UGR transversal	11.2
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	176°
Light distribution simmetry	Symmetrical

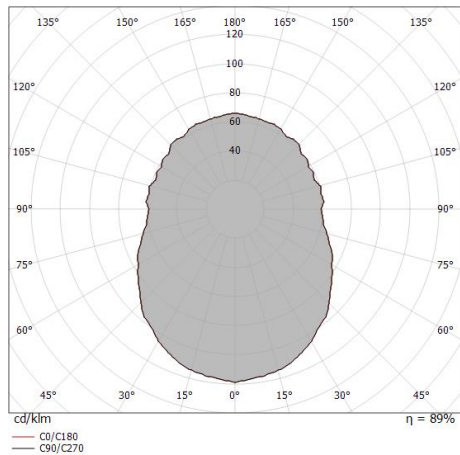

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	28.64	E(0°) E(C0) 88.0° 1930
1.0	57.27	E(0°) E(C0) 88.0° 480
1.5	85.91	E(0°) E(C0) 88.0° 210
2.0	114.55	E(0°) E(C0) 88.0° 120
2.5	143.18	E(0°) E(C0) 88.0° 80
3.0	171.82	E(0°) E(C0) 88.0° 50
Distance [m] Cone diameter [m] Illuminance [lx]		
— C0/C180 (Half-peak divergence: 176.0°)		

Stehleuchten | 220-240 V | 1xE27

12215

Single emission floor lamp for indoor application. Compatibility: LED lamp; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish.

The ingress protection degree is IP20; the total weight is of 1.715 kg.

The power supply cable is included and features a 2 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.