
Marge_FL65 RGB LED

Stehleuchten | 150 topLED 36 W DC 24 V | RGB
16000



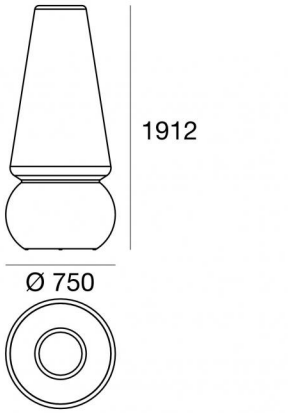

Technische Daten	
Typ	Stehleuchten
Installationsposition	Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	external
Lampe Nennleistung	36 W DC
Ähnlichste Farbtemperatur / Tone	RGB
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP65
IK	IK10
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Steckdose	Type F+E
Kabellänge	0.3 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	23 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche diffusor	
Material	PE
Farbe	Natural polyethilene

Oberfläche Oberfläche fassung	
Material	PC
Farbe	Weiß

Elektronik



14958
Remote RF Controller (1 - 3 art.)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Stehleuchten | 150 topLED 36 W DC 24 V | RGB
16000

Double emission floor lamp for outdoor application. The RGB LED light source with a diffused light distribution is composed of 150 stripled LEDs.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish.

The ingress protection degree is IP65; the total weight is of 23 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 36 W The power supply cable is included and features a 0.3 m length.

The device features protection class III and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Marge_FL65 RGB LED


Stehleuchten | 150 topLED 36 W DC 24 V | RGB
16000

Components

	Code
Cristy - | 220-240 V | 1xG9	6927

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Marge_FL65 RGB LED | Floor Lamp | Accessories
16000



Gegengewicht - Gegengewicht

Code
10013



Diebstahlschutz - Befestigungsbügel für die Installation am Boden mit Diebstahlschutz

Code
10015



Erdspießen - Erdspieß für die Installation im Boden
installationsposition: terreno,Material Verkleidung: pc

Code
14937



Spannkabel - Stahlbefestigungszugstangen
Material:Edelstahl --, farbe:Stahl.

Code
53890

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.