
Gypsum_WR2

Wandleuchten | 1 x powerLED 1 W DC 350 mA
60815N00



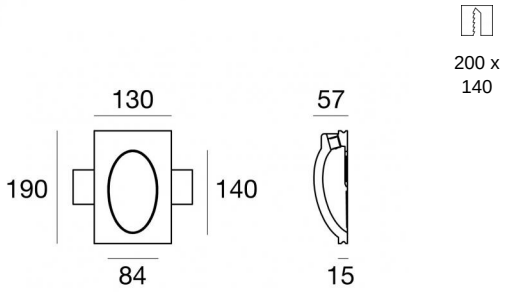

Technische Daten	
Installationsposition	Wand
Installationsumgebung	Indoor
Isolierklasse	3
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Einbautiefe	57 mm
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.980 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	gesso
Farbe	Weiß

Elektronik



89144
On/Off Driver 198~264V AC / 180~275V DC (1 - 2 art.)



89145
On/Off Driver 198~264V AC / 180~275V DC (3 - 6 art.)



99375
On/Off Driver 198~264V AC (6 - 12 art.)



C-E100010
1-10V - 0-10V Controller (3 - 4 art.)




C-E100011
Push and Simply Dim - DALI-2 Controller (3 - 4 art.)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Gypsum_WR2 | Wall Lights | Accessories
60815N00






Dicken - KIT Dicken für die Montage auf Gipskarton

Code
60830





Einbaugehäuse - Schalungssteine / Beton
Typ Installation: mauerwerk L=202mm, H=254mm, D=71mm.
Material:Eisen, farbe:Zink, bearbeitungstyp :Verzinken.

Code
60838

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.