
Gypsum_WR2

Wandleuchten | 1 x powerLED 1 W DC 350 mA | CRI 90
60815W00



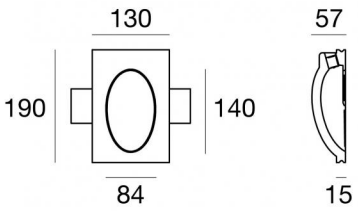

200 x
140

Technische Daten	
Installationsposition	Wand
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	1 W DC
Lichtstrom (Lichtquelle)	126 lm
Eingangsspannungsbereich	350mA
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Einbautiefe	57 mm
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.980 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	gesso
Farbe	Weiß

Elektronik



89144
On/Off Driver 198~264V AC / 180~275V DC (1 - 2 art.)



89145
On/Off Driver 198~264V AC / 180~275V DC (3 - 6 art.)



99375
On/Off Driver 198~264V AC (6 - 12 art.)



C-E100010
1-10V - 0-10V Controller (3 - 4 art.)



C-E100011
Push and Simply Dim - DALI-2 Controller (3 - 4 art.)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Wandleuchten | 1 x powerLED 1 W DC 350 mA | CRI 90
60815W00

Single emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 powerled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 126 lm, with a 126.0 lm/W nominal luminous efficacy.

The device body is made of plaster and features a white finish.

The ingress protection degree is IP40; the total weight is of 0.980 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1 W

The device features protection class III and can be wall lights-mounted, with a 200 x 140 mm hole (in plasterboard) with an outer casing, code 60838(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	36 %
Lichtstrom (Lichtquelle)	126 lm
Leuchten Lichtstrom	46 lm
Consumption	1,0 W
Leuchten Lichtausbeute	46 lm/W
Farbtemperatur	3000 K
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L80 B20 C0 80000h
L90 B10 C0 60000h

OPTICAL	
Optik C0/C180	150°
Light distribution simmetry	Asymmetrical

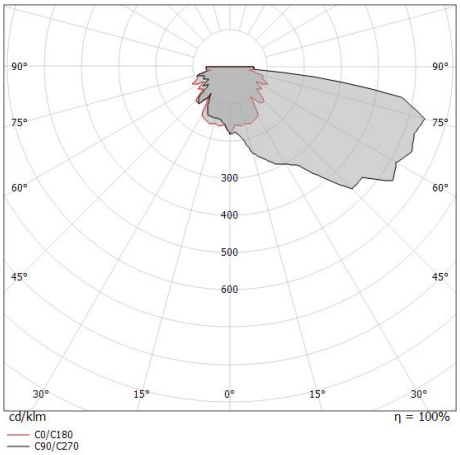


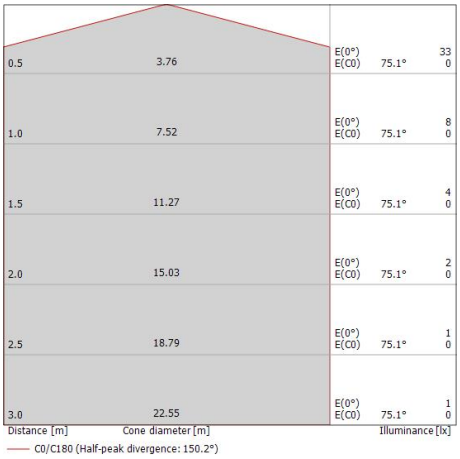

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Gypsum_WR2 | Wall Lights | Accessories
60815W00






Dicken - KIT Dicken für die Montage auf Gipskarton

Code
60830





Einbaugehäuse - Schalungssteine / Beton
Typ Installation: mauerwerk L=202mm, H=254mm, D=71mm.
Material:Eisen, farbe:Zink, bearbeitungstyp :Verzinken.

Code
60838

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.