


Notbeleuchtung | 220-240 V
1 x powerLED 1.5 W DC - 1.7 W AC | CRI 80
62564



69



Technische Daten	
Typ	Frame
Installationsposition	Wand
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	Asymmetric Wallwasher
Light emission direction	downward
Lampe Nennleistung	1.5 W DC
Gesamtleistung	1.7 W
Lichtstrom (Lichtquelle)	227 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Ähnlichste Farbtemperatur / Tone	6500 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Notbeleuchtung	Ja
Emergency mode time	3 ore
Percentage of brightness	57 %
UPS	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Einbautiefe	66 mm
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.2 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse

Material	Aluminium
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor

Material	Extra-helles Glas
Farbe	transparent
Bearbeitungstyp	Siebdruck

Notbeleuchtung | 220-240 V | 1 x powerLED 1.5 W DC - 1.7 W AC | CRI 80
62564

Single emission emergency for indoor application. The cold white LED light source with a asymmetric wallwasher light distribution is composed of 1 powered LEDs with CCT of 6500 K and a CRI 80; the source luminous flux is 227 lm, with a 227.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text white ral9003 finish, processed by means of coating; the diffuser is made of extra clear glass with a silk-screening treatment.


The ingress protection degree is IP40; the total weight is of 0.2 kg.

The total absorbed power is 1.7 W

The device features protection class II and can be wall lights-mounted, with a 69 x 69 mm hole (in plasterboard) with an outer casing, code 62630(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	31 %
Lichtstrom (Lichtquelle)	227 lm
Leuchten Lichtstrom	72 lm
Consumption	1.7 W
Leuchten Lichtausbeute	42 lm/W
Farbtemperatur	6500 K
Standard Deviation of Colour Matching	1/16 ANSI BIN
Farbwiedergabeindex	80 Ra
LED Life / Failure Ratio	
L70 B10 C0 716641h (at Tj 65 Ta 25)	
L80 B10 C0 445035h (at Tj 65 Ta 25)	
L90 B10 C0 205461h (at Tj 65 Ta 25)	
OPTICAL	
Optik C0/C180	150°
Light distribution simmetry	Asymmetrical

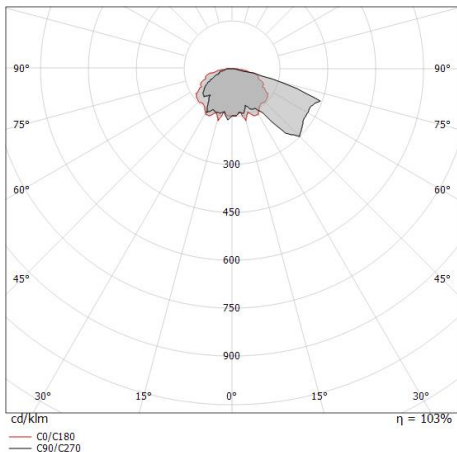

Fled_W | Emergency | Accessories
62564



Einbaugehäuse - Einbaugehäuse

Typ Installation: mauerwerk L=73mm, H=250mm, D=75mm

Code

62630