

Pendelleuchte | topLED 180 W DC 24 V | CRI 80

64364W00





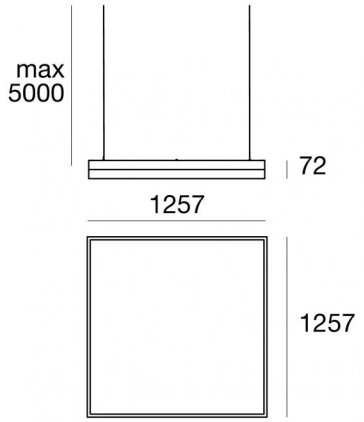

Technische Daten	
Typ	Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses + Diffuses
Light emission direction	upward + downward
Lampe Nennleistung	180 W DC
Lichtstrom (Lichtquelle)	25200 lm
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	5 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	11,5 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Optiktechnologie	Dot free

Oberfläche Oberfläche Gehäuse	
Material	Aluminiumlegierung 6060
Farbe	Text white RAL9003
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Oberfläche Oberfläche diffusor	
Material	UV beständiges Polycarbonat
Farbe	Opal

Elektronik



99786
On/Off Driver 180~295V AC / V DC (1 art.)



99787
DALI Controller 100~305V AC / 142~431V DC 240 W (1 art.)

Cables Electrification+suspension	
Cable connector	No
Max. Kabellänge	5000 mm
Cable connector	No
Max. Kabellänge	5000 mm
Cable connector	No
Max. Kabellänge	5000 mm
Cable connector	No
Max. Kabellänge	5000 mm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | topLED 180 W DC 24 V | CRI 80
64364W00

Single emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 576 topled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 12600 lm, with a 140.0 lm/W nominal luminous efficacy The warm white LED light source with a diffused light distribution is composed of 576 topled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 12600 lm, with a 140.0 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders; the diffuser is made of uv resistant polycarbonate.

The ingress protection degree is IP40; The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 180 W The power supply cable is included and features a 5 m length.

The device features protection class III and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 19.2 Lichtquellen der Energieeffizienzklasse D.


Illuminotechnical Eigenschaften	
Lichtstrom (Lichtquelle)	25200 lm
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B10 C0 494435h (at Tj 65 Ta 25)
L80 B10 C0 310287h (at Tj 65 Ta 25)
L90 B10 C0 147856h (at Tj 65 Ta 25)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Tour_QD | Pendant Luminaires | Accessories
64364W00






Deckenrosette - On/off - Max 150+150W
Einschließlich Driver: Nein; Netzteil-Verwaltungsprotokoll: On/off; Maximale Leistung: 150+150W. Material:Eisen, farbe:Text white RAL9003, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.


Code
64338





Deckenrosette - DALI Max 150+150W
Einschließlich Driver: Ja; Netzteil-Verwaltungsprotokoll: Dali,1-10v; Maximale Leistung: 150+150W. Material:Eisen, farbe:Text white RAL9003, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

Code
64328



Hängeleuchten - Befestigungssatz
Material:Aluminiumlegierung 6026, farbe:Text white RAL9003, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

Code
64270

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.