


Notbeleuchtung | 220-240 V
1 x powerLED 1.5 W DC - 1.7 W AC | CRI 80
64854



Technische Daten	
Typ	Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	60°
Light emission direction	downward
Lampe Nennleistung	1.5 W DC
Gesamtleistung	1.7 W
Lichtstrom (Lichtquelle)	227 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	6500 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Notbeleuchtung	Ja
UPS	Ja
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.95 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Stranggepresstes Aluminium EN AB - 46100
Farbe	Text white RAL9003
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Oberfläche Oberfläche diffusor	
Material	Extra-helles Glas
Farbe	Transparent

Notbeleuchtung | 220-240 V | 1 x powerLED 1.5 W DC - 1.7 W AC | CRI 80
64854

Single emission emergency for indoor application. The cold white LED light source is composed of 1 powered LEDs with CCT of 6500 K and a CRI 80; the source luminous flux is 227 lm, with a 227.0 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders; the diffuser is made of extra clear glass.



The ingress protection degree is IP40; the total weight is of 0.95 kg.

The total absorbed power is 1.7 W

The device features protection class I and can be ceiling-mounted with an outer casing, code 89373(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	76 %
Lichtstrom (Lichtquelle)	227 lm
Leuchten Lichtstrom	173 lm
Consumption	1.7 W
Leuchten Lichtausbeute	101 lm/W
Farbtemperatur	6500 K
Standard Deviation of Colour Matching	1/16 ANSI BIN
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
LED Life / Failure Ratio	
L70 B10 C0 716641h (at Tj 65 Ta 25)	
L80 B10 C0 445035h (at Tj 65 Ta 25)	
L90 B10 C0 205461h (at Tj 65 Ta 25)	
UGR	
UGR axial	24.6
UGR transversal	24.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	62°
Light distribution simmetry	Symmetrical

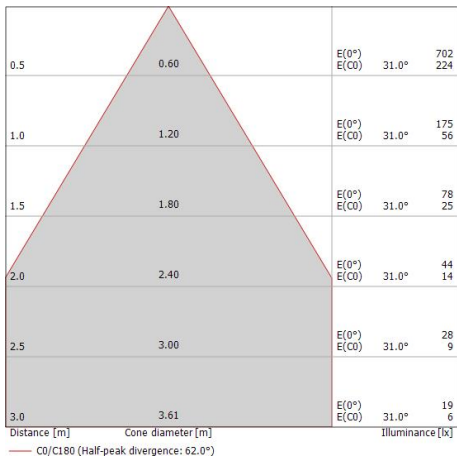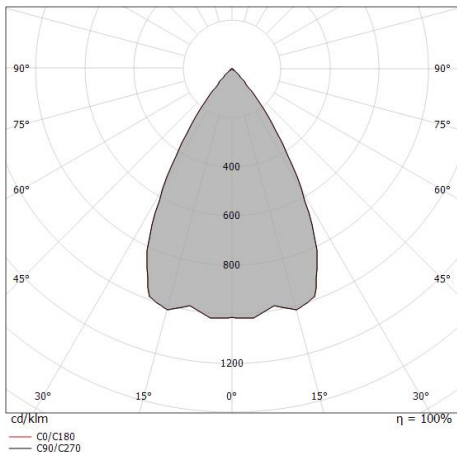

Fled_O | Emergency | Accessories
64854



Einbaugehäuse
installationsposition: decke; typ installation: mauerwerk L=213mm, H=125mm, D=138mm.
Material:Polypropylen, farbe:Weiß.

Code
89373