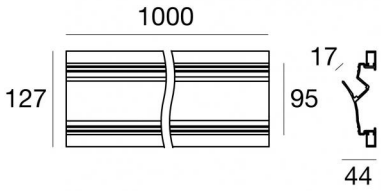
Fylo+ Recessed_1

Systeme - Lineare Elemente | Modular

65027



1000 x 97



Technische Daten	
Typ	Systeme - Lineare
Installationsposition	Wand
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Nein
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Nettogewicht	1.06 Kg
Modularity	Modular


Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Kreideweiß
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Fylo+ Recessed_1


Systeme - Lineare Elemente | Modular
65027

Components


Ribbon PRO - LED Strip | topLED 18 W DC 24 V | 3.6 W/m | 511.6 Lm/m

Code
82123


Ribbon PRO - LED Strip | topLED 18 W DC 24 V | 3.6 W/m | 518 Lm/m

Code
82124


Ribbon PRO

Code
82125


Ribbon PRO

Code
82129


Ribbon PRO

Code
82130


Ribbon PRO - LED Strip | topLED 48 W DC 24 V | 9.6 W/m | 1503.8 Lm/m

Code
82131

Ribbon PRO - LED Strip | topLED 33.5 W DC 24 V | 6.7 W/m | 927.6 Lm/m

Code
82156

Ribbon PRO

Code
82157

Fylo+ Recessed_1


Systeme - Lineare Elemente | Modular
65027

Components




Ribbon PRO - LED Strip | topLED 33.5 W DC 24 V | 6.7 W/m | 1023 Lm/m

Code
82158




Ribbon PRO

Code
82162




Ribbon PRO - LED Strip | topLED 68 W DC 24 V | 13.6 W/m | 2097.8 Lm/m

Code
82164




Ribbon PRO - LED Strip | topLED 68 W DC 24 V | 13.6 W/m | 1961.2 Lm/m

Code
82163




Ribbon PRO - LED Strip | topLED 84 W DC 24 V | 16.8 W/m | 2371.4 Lm/m

Code
82168



Ribbon PRO - LED Strip | topLED 84 W DC 24 V | 16.8 W/m | 2419.6 Lm/m

Code
82169



Ribbon PRO - LED Strip | topLED 84 W DC 24 V | 16.8 W/m | 2602.6 Lm/m

Code
82170




Ribbon PRO - topLED 43 W DC 48 V

Code
C00423WH

Fylo+ Recessed_1

Systeme - Lineare Elemente | Modular
65027

Components




Ribbon Plus - LED Strip | topLED 24 W DC 24 V | 4.8 W/m | 550 Lm/m

Code
82174




Ribbon Plus

Code
82175




Ribbon Plus

Code
82176



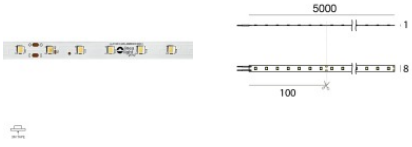
Ribbon Plus

Code
82180



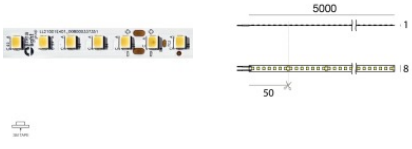
Ribbon Plus - LED Strip | topLED 48 W DC 24 V | 9.6 W/m | 1150 Lm/m

Code
82181



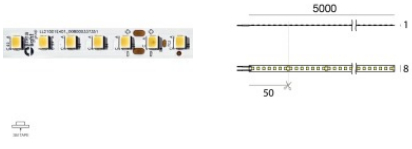
Ribbon Plus - LED Strip | topLED 48 W DC 24 V | 9.6 W/m | 1260 Lm/m

Code
82182



Ribbon Plus

Code
82194




Ribbon Plus - LED Strip | topLED 72 W DC 24 V | 14.4 W/m | 1870 Lm/m

Code
82193


Systeme - Lineare Elemente | Modular
65027

Components


Ribbon Plus

Code
82192


Ribbon Plus

Code
82187


Ribbon Plus

Code
82186


Ribbon Plus - LED Strip | topLED 48 W DC 24 V | 9.6 W/m | 1252 Lm/m

Code
82188


Ribbon Plus

Code
82207


Ribbon Plus - LED Strip | topLED 96 W DC 24 V | 19.2 W/m | 2306 Lm/m

Code
82209

Ribbon Plus - LED Strip | 700 topLED 96 W DC 24 V | 19.2 W/m | 2402 Lm/m

Code
82210

Ribbon Plus WT - LED Strip | topLED 65 W DC 24 V | 13 W/m

Code
C00419WHSDI

Fylo+ Recessed_1

Systeme - Lineare Elemente | Modular
65027

Components



Ribbon Plus Dynamic White - LED Strip | topLED 62.5 W DC 24 V | 12.5 W/m

Code
C00418WHDDI



Ribbon Plus RGBW - LED Strip | topLED 96 W DC 24 V | 19.2 W/m

Code
C00417WHVDI

Ribbon Basic_V2 - LED Strip | topLED 24 W DC 24 V | 4.8 W/m | 466.2 Lm/m

Code
C00495WH

Ribbon Basic_V2

Code
C00496WH



Ribbon HF_V2 168 LEDs/m - LED Strip | topLED 72 W DC 24 V | 14.4 W/m | 1545 Lm/m


Code
C00503WH

Ribbon HF_V2 238 LEDs/m - LED Strip | topLED 98 W DC 24 V | 19.6 W/m | 2125.6 Lm/m

Code
C00504WH

Ribbon HE 160 LEDs/m - LED Strip | topLED 60 W DC 24 V | 12 W/m | 1467.8 Lm/m

Code
C00506WH





Ribbon HE 160 LEDs/m - LED Strip | 800 topLED 108 W DC 24 V | 21.6 W/m | 2767.6 Lm/m

Code
C00507WH



Systeme - Lineare Elemente | Modular
65027

Components


Ribbon HD 160 LEDs/m - LED Strip | topLED 60 W DC 24 V | 12 W/m | 1278.8 Lm/m

Code
C00509WH



Ribbon HD 160 LEDs/m

Code
C00510WH



Ribbon Slim_V2 120 LEDs/m - LED Strip | topLED 48 W DC 24 V | 9.6 W/m | 805.8 Lm/m

Code
C00511WH



Ribbon Slim_V2 160 LEDs/m

Code
C00512WH

Ribbon Distance 130 LEDs/m

Code
C00514WH


Ribbon Distance 130 LEDs/m - LED Strip | topLED 207 W DC 48 V | 13.8 W/m | 1391.2 Lm/m

Code
C00515WH

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Fylo+ Recessed_1 | Lines | Accessories
65027






Diffusor

Code
65054






Diffusor


Code
65055





Abdeckung
Material:gesso, farbe:Weiß.


Code
65088






Abdeckung
Material:gesso, farbe:Weiß.

Code
65089





Einbaugehäuse
installationsposition: decke L=320mm, H=55mm, D=100mm

Code
62900

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.