



| CRI 80
65367W00

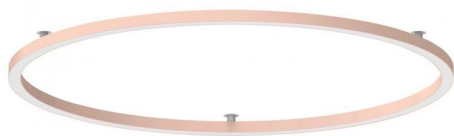

38

Ø 1430



Technische Daten	
Typ	Oberfläche
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	70 W DC
Lichtstrom (Lichtquelle)	9355 lm
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	7 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Optiktechnologie	Dot free

Oberfläche Oberfläche Gehäuse

Material	Aluminiumlegierung 6060
Farbe	Roségold
Bearbeitungstyp	Flüssiglackierung

Oberfläche Oberfläche diffusor

Material	UV beständiges Polycarbonat
Farbe	Opal

Elektronik

	99332 1-10V Controller (1 - 2 art.)
	99374 On/Off Driver 198-264V AC / 176-275V DC 75 W (1 art.)
	99722 DALI Controller 90-305V AC / V DC (1 art.)
	83062 DALI - Push and Simply Dim Controller 198-264V AC / V DC (1 - 2 art.)
	83018 N/O button On/Off Driver 198-264V AC / 180-275V DC 75 W (1 art.)

| CRI 80
65367W00

Single emission ceiling downlights for indoor application. The warm white LED light source with a diffused light distribution is composed of 336 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 9355 lm, with a 133.6 lm/W nominal luminous efficacy.


The device body is made of aluminium alloy 6060 and features a rose gold finish, processed by means of liquid painting; the diffuser is made of uv resistant polycarbonate.

The ingress protection degree is IP40; the total weight is of 7 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 70 W

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

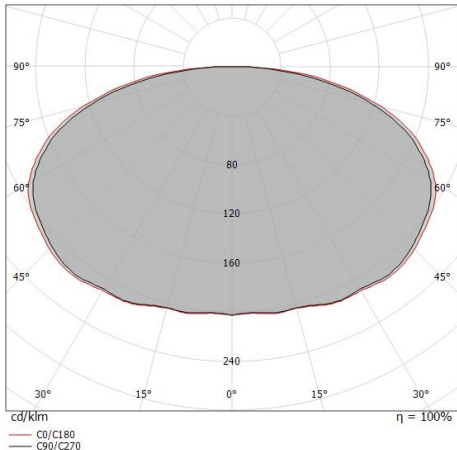

0.5	4.30 4.63	E(0°) E(C90) E(C0)	76.9° 77.8° 77.8°	4007 24 20
1.0	8.59 9.25	E(0°) E(C90) E(C0)	76.9° 77.8° 77.8°	1002 6 5
1.5	12.89 13.88	E(0°) E(C90) E(C0)	76.9° 77.8° 77.8°	445 3 2
2.0	17.19 18.50	E(0°) E(C90) E(C0)	76.9° 77.8° 77.8°	250 2 1
2.5	21.49 23.13	E(0°) E(C90) E(C0)	76.9° 77.8° 77.8°	160 1 1
3.0	25.78 27.75	E(0°) E(C90) E(C0)	76.9° 77.8° 77.8°	111 1 1

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 155.6°)
— C90/C270 (Half-peak divergence: 153.8°)

Energieeffizienzklasse	
Dieses Produkt enthält 16 Lichtquellen der Energieeffizienzklasse D.	


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	52 %
Lichtstrom (Lichtquelle)	9355 lm
Leuchten Lichtstrom	4944 lm
Consumption	70 W
Leuchten Lichtausbeute	70 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio	
L70 B10 C0 494435h (at Tj 65 Ta 25)	
L80 B10 C0 310287h (at Tj 65 Ta 25)	
L90 B10 C0 147856h (at Tj 65 Ta 25)	

UGR	
UGR axial	19.9
UGR transversal	20.2
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	154°
Light distribution simmetry	Symmetrical

Tour_CD | Ceiling Downlights | Accessories
65367W00



Abstandshalter - Distanzstück-Kit für Tour_C
Material:Aluminiumlegierung 6026, farbe:Roségold, bearbeitungstyp :Flüssiglackierung.

Code
65391