
Poller & Mastaufsatzleuchten | 80-265 V
topLED 8 W DC - 9.5 W AC | CRI 80
**65396W07**



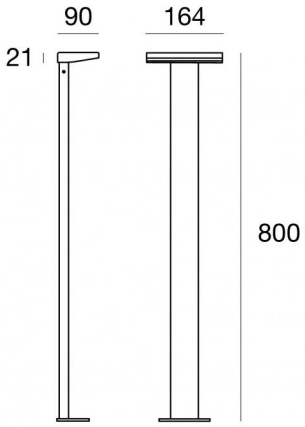


| Technische Daten | |
|---|---|
| Typ | Poller |
| Installationsposition | Boden |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Asymmetric Wallwasher |
| Light emission direction | downward |
| Lampe Nennleistung | 8 W DC |
| Gesamtleistung | 9.5 W |
| Lichtstrom (Lichtquelle) | 780 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 85 - 277 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 3000 K |
| Farbwiedergabeindex | 80 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 2 |
| IP | IP65 |
| IK | IK08 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | Nein |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Nein |
| Harzbeschichtung | Ja |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 2.3 Kg |
| Schutz vor elektrostatischen Entladungen | 4 KV |
| Schutz vor Stoßspannungen | 0,5 KV |
| Optiktechnologie | Optilight TM |
| Technische Merkmale des Produkts | Acquastop - UV Resistant |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Stranggepresstes Aluminium EN AB - 46100 |
| Farbe | Dark brown |
| Bearbeitungstyp | Offenporige Anodisierung + Pulverlackierung |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | Polymethylmethacrylat UV-beständige |
| Farbe | Transparent |
| Bearbeitungstyp | Lasersiebdruck |

| Oberfläche Oberfläche sockel | |
|---|---|
| Material | Verzinktes Eisen |
| Farbe | Dark brown |
| Bearbeitungstyp | Pulverbeschichtung mit duroplastischen Pulvern |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Poller & Mastaufsatzleuchten | 80-265 V | topLED 8 W DC - 9.5 W AC | CRI 80
**65396W07**

Single emission bollard & pole for outdoor application. The warm white LED light source with a asymmetric wallwasher light distribution is composed of 18 topled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 780 lm, with a 97.5 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a dark brown finish, processed by means of open pore anodizing + powder coating; the diffuser is made of uv resistant polymethylmethacrylate with a laser screen printing treatment. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP65; the total weight is of 2.3 kg.

The total absorbed power is 9.5 W

The device features protection class II and can be floor-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.


| **Energieeffizienzklasse** |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D. |

| **Illuminotechnical Eigenschaften** | |
|---|---|
| Light Output Ratio (LOR) | 28 % |
| Lichtstrom (Lichtquelle) | 780 lm |
| Leuchten Lichtstrom | 226 lm |
| Consumption | 9.5 W |
| Leuchten Lichtausbeute | 23 lm/W |
| Farbtemperatur | 3000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 80 Ra |
| Standardumgebungstemperatur | -20 / +50°C |

| **LED Life / Failure Ratio** |
|---|
| L70 B10 C0 494435h (at Tj 65 Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65 Ta 25 ) |
| L90 B10 C0 147856h (at Tj 65 Ta 25 ) |

| **OPTICAL** | |
|---|---|
| Optik C0/C180 | 123° |
| Light distribution simmetry | Asymmetrical |

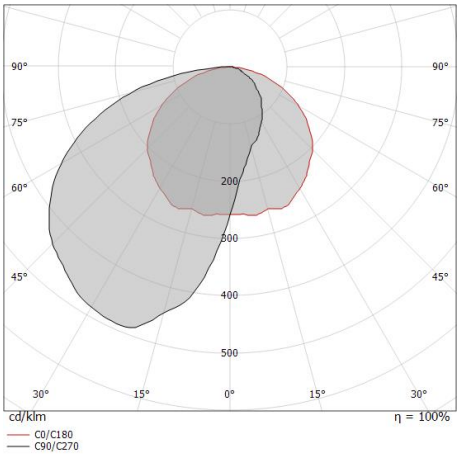


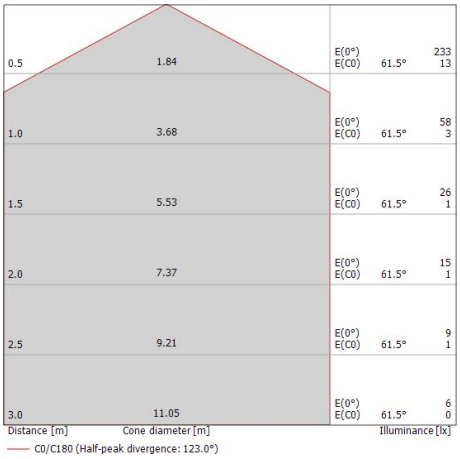


Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Opti-Pole | Bollard & Pole | Accessories
**65396W07**




Erdspießen

installationsposition: boden,Material Verkleidung: stahl aisi 304

**Code**

64200



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.