


Systeme - Lineare Elemente
396 topLED 30 W DC 24 V | Modular | CRI 90
65440N

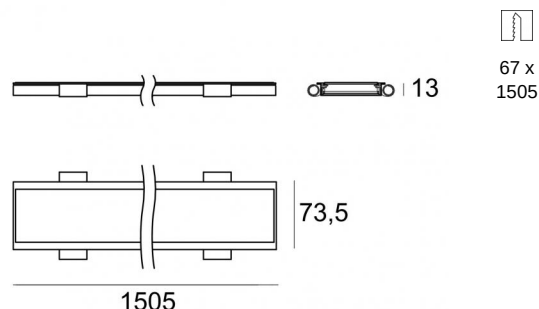

Technische Daten	
Typ	Systeme - Lineare Elemente - Frame
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Light emission direction	downward
Lampe Nennleistung	30 W DC
Lichtstrom (Lichtquelle)	4000 lm
Ähnlichste Farbtemperatur / Tone	4000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP40
IP optisches System	IP54
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Einbautiefe	13 mm
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.1 Kg
Modularity	Modular
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Optiktechnologie	Dot free

Oberfläche Oberfläche Gehäuse

Material	Aluminiumlegierung 6060
Farbe	Text white RAL9003
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Elektronik

	99331 On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 5 art.)
	99332 1-10V Controller (1 - 5 art.)
	99374 On/Off Driver 198~264V AC / 176~275V DC 75 W (1 - 2 art.)
	83333 Push and Simply Dim - DALI-2 Controller (1 - 5 art.)
	C-E400002 Push and Simply Dim - DALI-2 Controller (1 - 8 art.)

Systeme - Lineare Elemente | 396 topLED 30 W DC 24 V | Modular | CRI 90 | + 62461
65440N

Single emission systems, lines or lines for indoor application. The natural white LED light source is composed of 396 topLED LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 4000 lm, with a 133.3 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 1.1 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 30 W

The device features protection class III and can be ceiling-mounted, with a 67 x 1505 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 6 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	43 %
Lichtstrom (Lichtquelle)	4000 lm
Leuchten Lichtstrom	1727 lm
Consumption	30 W
Leuchten Lichtausbeute	57 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 494435h (at Tj 65 Ta 25)

L80 B10 C0 310287h (at Tj 65 Ta 25)



L90 B10 C0 147586h (at Tj 65 Ta 25)

UGR

UGR axial	22.2
UGR transversal	22.8
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C90/C270	100°
Optik C0/C180	106°
Light distribution simmetry	Symmetrical 2 assis

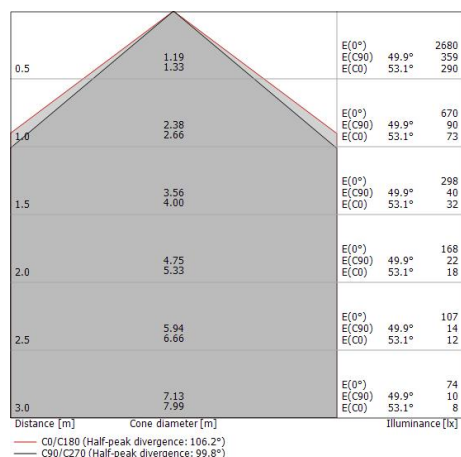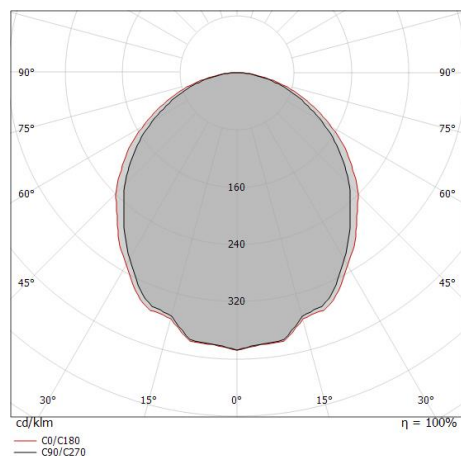

Systeme - Lineare Elemente | 396 topLED 30 W DC 24 V | Modular | CRI 90 | + 62464
65440N

Single emission systems, lines or lines for indoor application. The natural white LED light source is composed of 396 topled LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 4000 lm, with a 133.3 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 1.1 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 30 W

The device features protection class III and can be ceiling-mounted, with a 67 x 1505 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.



Energieeffizienzklasse
Dieses Produkt enthält 6 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	35 %
Lichtstrom (Lichtquelle)	4000 lm
Leuchten Lichtstrom	1406 lm
Consumption	30 W
Leuchten Lichtausbeute	46 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio
L70 B10 C0 494435h (at Tj 65 Ta 25)
L80 B10 C0 310287h (at Tj 65 Ta 25)
L90 B10 C0 147586h (at Tj 65 Ta 25)

UGR	
UGR axial	17.7
UGR transversal	18.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	72°
Optik C0/C180	78°
Light distribution simmetry	Symmetrical 2 assis

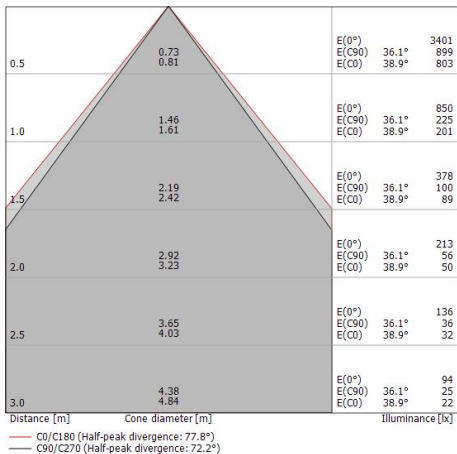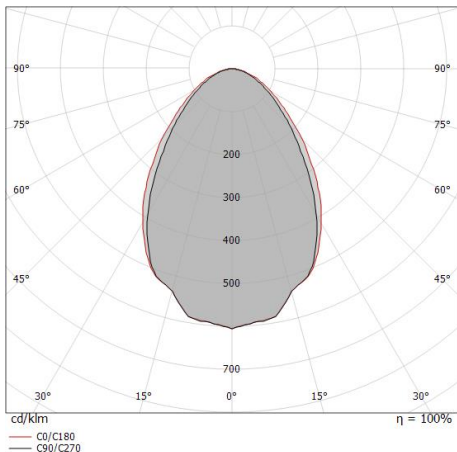

Systeme - Lineare Elemente | 396 topLED 30 W DC 24 V | Modular | CRI 90 | + 83356

65440N

Single emission systems, lines or lines for indoor application. The natural white LED light source is composed of 396 topLEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 4000 lm, with a 133.3 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 1.1 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 30 W

The device features protection class III and can be ceiling-mounted, with a 67 x 1505 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 6 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	46 %
Lichtstrom (Lichtquelle)	4000 lm
Leuchten Lichtstrom	1842 lm
Consumption	30 W
Leuchten Lichtausbeute	61 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 494435h (at Tj 65 Ta 25)

L80 B10 C0 310287h (at Tj 65 Ta 25)



L90 B10 C0 147586h (at Tj 65 Ta 25)

UGR

UGR axial	18.4
UGR transversal	18.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	78°
Light distribution simmetry	Symmetrical

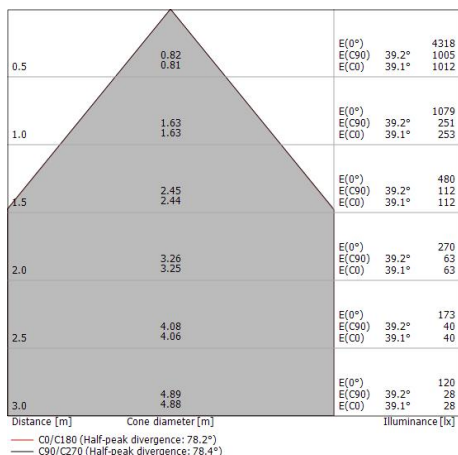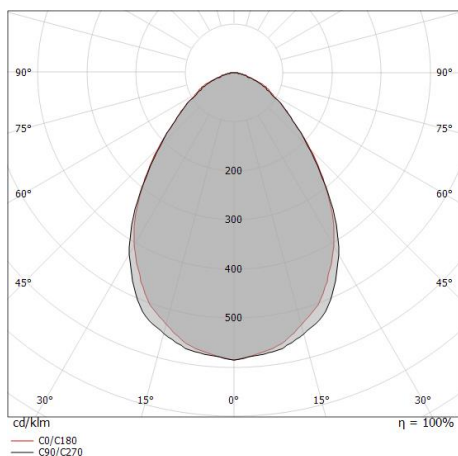

Systeme - Lineare Elemente | 396 topLED 30 W DC 24 V | Modular | CRI 90 | + 83407

65440N

Single emission systems, lines or lines for indoor application. The natural white LED light source is composed of 396 topLED LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 4000 lm, with a 133.3 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 1.1 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 30 W

The device features protection class III and can be ceiling-mounted, with a 67 x 1505 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 6 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	51 %
Lichtstrom (Lichtquelle)	4000 lm
Leuchten Lichtstrom	2076 lm
Consumption	30 W
Leuchten Lichtausbeute	69 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 494435h (at Tj 65 Ta 25)

L80 B10 C0 310287h (at Tj 65 Ta 25)


L90 B10 C0 147586h (at Tj 65 Ta 25)

UGR

UGR axial	21.1
UGR transversal	23.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL



Optik C90/C270	106°
Optik C0/C180	114°
Light distribution simmetry	Symmetrical 2 assis

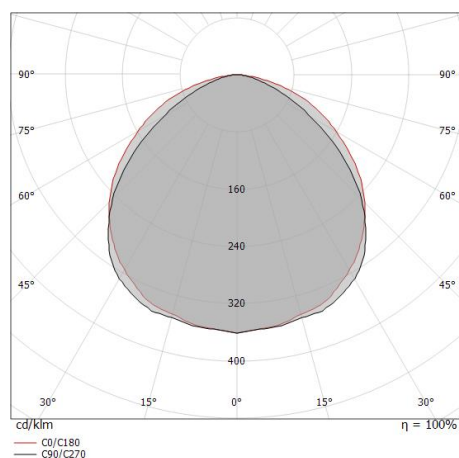

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.33 1.53	E(0°) E(C90) E(C0) 53.0° 56.8° 2998 327 247
1.0	2.65 3.06	E(0°) E(C90) E(C0) 53.0° 56.8° 750 82 62
1.5	3.98 4.58	E(0°) E(C90) E(C0) 53.0° 56.8° 333 36 27
2.0	5.31 6.11	E(0°) E(C90) E(C0) 53.0° 56.8° 187 20 15
2.5	6.64 7.64	E(0°) E(C90) E(C0) 53.0° 56.8° 120 13 10
3.0	7.96 9.17	E(0°) E(C90) E(C0) 53.0° 56.8° 83 9 7

— C0/C180 (Half-peak divergence: 113.6°)
— C90/C270 (Half-peak divergence: 106.0°)

Rollip_PRO | Lines | Accessories
65440N

		Diffusor - Blendfreier Diffusor – Länge 5m Diffusorart: anti-glare diffuser. Material:Polymethylmethacrylat UV-beständige, bearbeitungstyp :Satinieren.	Code <u>83356</u>
		Diffusor - Blendfreier Diffusor – Länge 10m Diffusorart: anti-glare diffuser. Material:Polymethylmethacrylat UV-beständige, bearbeitungstyp :Satinieren.	Code <u>83357</u>
		Diffusor - Opal – Länge 5 m Diffusorart: opal diffuser. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>83407</u>
		Diffusor - Opal – Länge 10m Diffusorart: opal diffuser. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>83408</u>
		Diffusor - Opal – Länge 20m Diffusorart: opal diffuser. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>83409</u>
		Endkappe - Quarzglas Material:Stranggepresstes Aluminium EN AB - 46100, farbe:Text white RAL9003, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.	Code <u>62460</u>