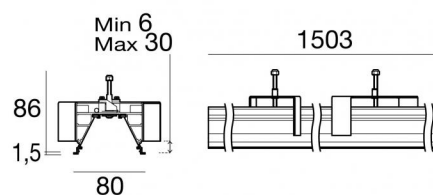


Systeme - Lineare Elemente

360 topLED 54 W DC 24 V | Modular | CRI 92

65452M

76 x
1503

Technische Daten	
Typ	Systeme - Lineare Elemente - Frame
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Light emission direction	downward
Lampe Nennleistung	54 W DC
Lichtstrom (Lichtquelle)	5950 lm
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	92 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP40
IP optisches System	IP54
Glühdrahtprüfung	Nein
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.20 m
Harzbeschichtung	Nein
Einbautiefe	86 mm
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.60 Kg
Modularity	Modular
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Optiktechnologie	Dot free

Oberfläche Oberfläche Gehäuse

Material	Aluminiumlegierung 6060
Farbe	Text white RAL9003
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Elektronik

	99331 On/Off Driver 198-264V AC / 176-275V DC 150 W (1 - 2 art.)
	99332 1-10V Controller (1 - 2 art.)
	99374 On/Off Driver 198-264V AC / 176-275V DC 75 W (1 art.)
	99787 DALI Controller 100-305V AC / 142-431V DC 240 W (1 - 4 art.)
	83062 DALI - Push and Simply Dim Controller 198-264V AC / V DC (1 - 2 art.)

Cables Electrification

Cable connector	No
-----------------	----

Systeme - Lineare Elemente | 360 topLED 54 W DC 24 V | Modular | CRI 92
65452M

Single emission systems, lines or lines for indoor application. The super warm white LED light source is composed of 360 topLEDs with CCT of 2700 K and a CRI 92; the source luminous flux is 5950 lm, with a 110.2 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 1.60 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 54 W The power supply cable is included and features a 0.20 m length.

The device features protection class III and can be ceiling-mounted, with a 76 x 1503 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 3 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

Lichtstrom (Lichtquelle)	5950 lm
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	92 Ra
Standardumgebungstemperatur	-20 / +50°C


LED Life / Failure Ratio

L70 B10 C0 494435h (at Tj 65 Ta 25)

L80 B10 C0 310287h (at Tj 65 Ta 25)

L90 B10 C0 147586h (at Tj 65 Ta 25)

Rollip70_MC | Lines | Accessories
65452M



		Diffusor - Opaline diffuser L.5mt Diffusorart: opalen diffusor. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>65208</u>
		Diffusor - Opaline diffuser L.10mt Diffusorart: opalen diffusor. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>65209</u>
		Diffusor - Opaline diffuser L.20mt Diffusorart: opalen diffusor. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>65210</u>
		Diffusor - Opaline diffuser L.50mt Diffusorart: opalen diffusor. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>65211</u>
		Diffusor - Asymmetrisch - Länge 5m Diffusorart: asymmetric. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>65238</u>
		Diffusor - Asymmetrisch - Länge 10m Diffusorart: asymmetric. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>65239</u>
		Diffusor Diffusorart: diffusore nero. Material:UV beständiges Polycarbonat, farbe:Black.	Code <u>64045</u>
		Diffusor Diffusorart: diffusore nero. Material:UV beständiges Polycarbonat, farbe:Black.	Code <u>64055</u>

Rollip70_MC | Lines | Accessories
65452M




Diffusor
Diffusorart: diffusore nero.
Material:UV beständiges Polycarbonat, farbe:Black.

Code
64065




Diffusor
Diffusorart: diffusore nero.
Material:UV beständiges Polycarbonat, farbe:Black.

Code
64075



Endkappe
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
65218



x 2



Lochschablone

Code
99801