

Systeme | 198-264 V AC /220-240 V DC
240 + 240 topLED 72 W DC - 84 W AC | Modular | CRI 92
**65524W**

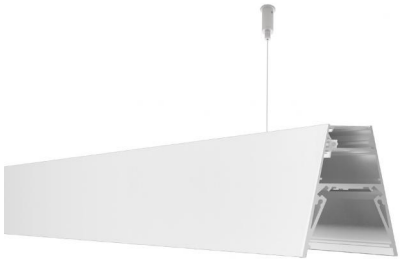

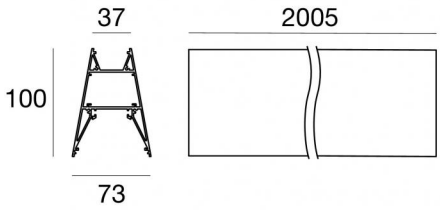


| Technische Daten | |
|---|---|
| Typ | Systeme |
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Light emission direction | upward + downward |
| Lampe Nennleistung | 72 W DC |
| Gesamtleistung | 84 W |
| Lichtstrom (Lichtquelle) | 9756 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 198 - 264 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 3000 K |
| Farbwiedergabeindex | 92 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 1 |
| IP | IP40 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | DALI-2 - PUSH DIM |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Nein |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Zweiflammig |
| Nettogewicht | 6 Kg |
| Modularity | Modular |
| Schutz vor elektrostatischen Entladungen | 4 KV |
| Schutz vor Stoßspannungen | 1 KV |
| Optiktechnologie | Dot free |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminiumlegierung 6060 |
| Farbe | Text white RAL9003 |
| Bearbeitungstyp | Pulverbeschichtung mit duroplastischen Pulvern |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | UV beständiges Polycarbonat |
| Farbe | Opal |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Systeme | 198-264 V AC /220-240 V DC | 240 + 240 topLED 72 W DC - 84 W AC | Modular | CRI 92 | + 65208

**65524W**

Double emission systems for indoor application. The warm white LED light source is composed of 240 topled LEDs with CCT of 3000 K and a CRI 92; the source luminous flux is 4878 lm, with a 135.5 lm/W nominal luminous efficacy The warm white LED light source is composed of 240 topled LEDs with CCT of 3000 K and a CRI 92; the source luminous flux is 4878 lm, with a 135.5 lm/W nominal luminous efficacy.


The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders; the diffuser is made of uv resistant polycarbonate.


The ingress protection degree is IP40; the total weight is of 6 kg.

The total absorbed power is 84 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

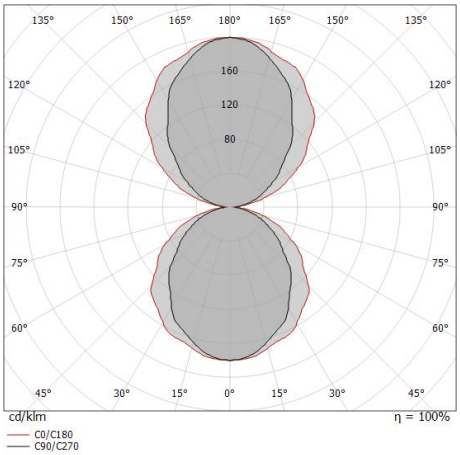

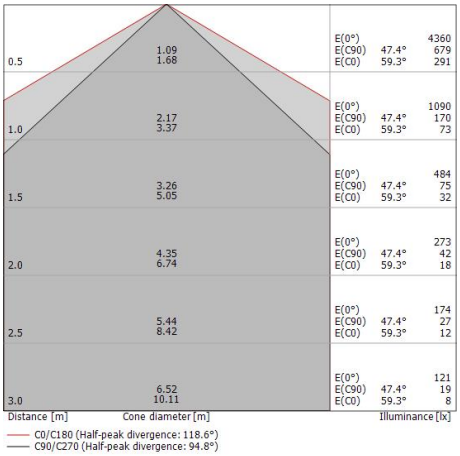
| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält 8 Lichtquellen der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 61 % |
| Lichtstrom (Lichtquelle) | 9756 lm |
| Leuchten Lichtstrom | 6041 lm |
| Consumption | 84 W |
| Leuchten Lichtausbeute | 71 lm/W |
| Farbtemperatur | 3000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 92 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 494435h (at Tj 65 Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65 Ta 25 ) |
| L90 B10 C0 147586h (at Tj 65 Ta 25 ) |

| UGR | |
|---|---|
| UGR axial | 18.1 |
| UGR transversal | 20.4 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C90/C270 | 95° |
| Optik C0/C180 | 119° |
| Light distribution simmetry | Symmetrical 2 assis |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Systeme | 198-264 V AC /220-240 V DC | 240 + 240 topLED 72 W DC - 84 W AC | Modular | CRI 92 | + 65236

**65524W**

Double emission systems for indoor application. The warm white LED light source is composed of 240 topled LEDs with CCT of 3000 K and a CRI 92; the source luminous flux is 4878 lm, with a 135.5 lm/W nominal luminous efficacy The warm white LED light source is composed of 240 topled LEDs with CCT of 3000 K and a CRI 92; the source luminous flux is 4878 lm, with a 135.5 lm/W nominal luminous efficacy.


The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders; the diffuser is made of uv resistant polycarbonate.


The ingress protection degree is IP40; the total weight is of 6 kg.

The total absorbed power is 84 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

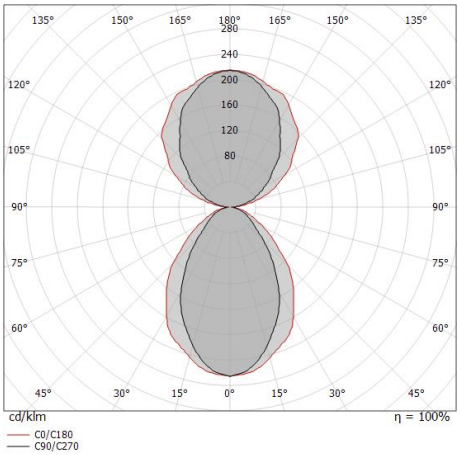

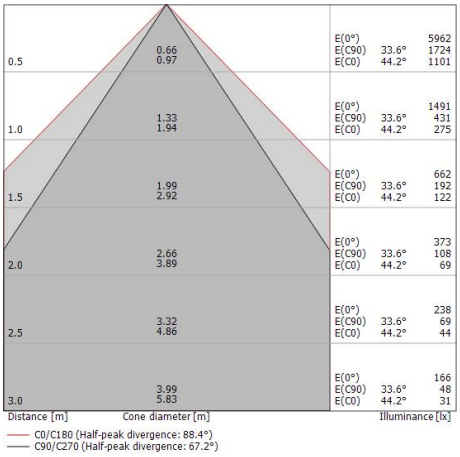
| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält 8 Lichtquellen der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 57 % |
| Lichtstrom (Lichtquelle) | 9756 lm |
| Leuchten Lichtstrom | 5625 lm |
| Consumption | 84 W |
| Leuchten Lichtausbeute | 66 lm/W |
| Farbtemperatur | 3000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 92 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 494435h (at Tj 65 Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65 Ta 25 ) |
| L90 B10 C0 147586h (at Tj 65 Ta 25 ) |

| UGR | |
|---|---|
| UGR axial | 13.9 |
| UGR transversal | 15.9 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C90/C270 | 67° |
| Optik C0/C180 | 88° |
| Light distribution simmetry | Symmetrical 2 assis |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rollip7035_MP | Systems | Accessories
**65524W**




Hängeleuchten - Suspension kit 2 mt.
Material:Messing OT58, farbe:Text white RAL9003, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

**Code**
64776

---





Diffusor - Opaline diffuser L.5mt
Diffusorart: opalen diffusor.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
65208

---





Diffusor - Opaline diffuser L.10mt
Diffusorart: opalen diffusor.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
65209

---





Diffusor - Opaline diffuser L.20mt
Diffusorart: opalen diffusor.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
65210

---





Diffusor - Opaline diffuser L.50mt
Diffusorart: opalen diffusor.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
65211

---





Diffusor - Blendschutzdiffusor UGR weniger als 19 – Länge 5 m
Diffusorart: anti-abbagliamento.
Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.

**Code**
65236

---





Diffusor - Blendschutzdiffusor UGR weniger als 19 – Länge 10m
Diffusorart: anti-abbagliamento.
Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.

**Code**
65237

---






Diffusor
Diffusorart: diffusore nero.
Material:UV beständiges Polycarbonat, farbe:Black.

**Code**
64045



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.


Rollip7035_MP | Systems | Accessories
**65524W**






Diffusor
Diffusorart: diffusore nero.
Material:UV beständiges Polycarbonat, farbe:Black.

**Code**
64055






Diffusor
Diffusorart: diffusore nero.
Material:UV beständiges Polycarbonat, farbe:Black.

**Code**
64065






Diffusor
Diffusorart: diffusore nero.
Material:UV beständiges Polycarbonat, farbe:Black.

**Code**
64075







Endkappe - Endkappen-Kit für Rollip7035 - Weiß
Material:Stranggepresstes Aluminium EN AB - 46100, farbe:Text white RAL9003, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

**Code**
64280






Drahtabdeckung - Power kit - Single/Double emission - DALI - White
Material:Eisen, farbe:Text white RAL9003, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

**Code**
64660



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.