


Wandleuchten - Step-Leuchten
12 topLED 4 W DC 24 V | CRI 80
76098W07



Technische Daten	
Typ	Step-Leuchten
Installationsposition	Wand
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Asymmetric Wallwasher
Light emission direction	downward
Lampe Nennleistung	4 W DC
Lichtstrom (Lichtquelle)	426 lm
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP66
IK	IK10
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Ja
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1 m
Harzbeschichtung	Ja
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.170 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Technische Merkmale des Produkts	Acquastop

Oberfläche Oberfläche Gehäuse

Material	Stranggepresstes Aluminium EN AB - 46100
Farbe	Text white RAL9003
Bearbeitungstyp	Offenporige Anodisierung + Pulverlackierung

Oberfläche Oberfläche diffusor

Material	Silikonharz
Farbe	Transparent

Elektronik



89488
On/Off Driver 190-250V AC / 180-275V DC 14.4 W (1 - 3 art.)



89179
On/Off Driver 198-264V AC 24 W (1 - 6 art.)



89359
On/Off Driver 198-264V AC / V DC (1 - 12 art.)



99332
1-10V Controller (1 - 37 art.)



99722
DALI Controller 90-305V AC / V DC (1 - 30 art.)

Cables Electrification

Cable connector	No connector - Neoprene 2x0.5mm ²
-----------------	--

Wandleuchten - Step-Leuchten | 12 topLED 4 W DC 24 V | CRI 80
76098W07

Single emission wall lights for outdoor application. The warm white LED light source with a asymmetric wallwasher light distribution is composed of 12 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 426 lm, with a 106.5 lm/W nominal luminous efficacy.


The device body is made of die-cast aluminium en ab - 46100 and features a text white ral9003 finish, processed by means of open pore anodizing + powder coating; the diffuser is made of silicone resin. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP66; the total weight is of 0.170 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 4 W The power supply cable is included and features a 1 m length.

The device features protection class III and can be wall lights-mounted with an outer casing, code 98111(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

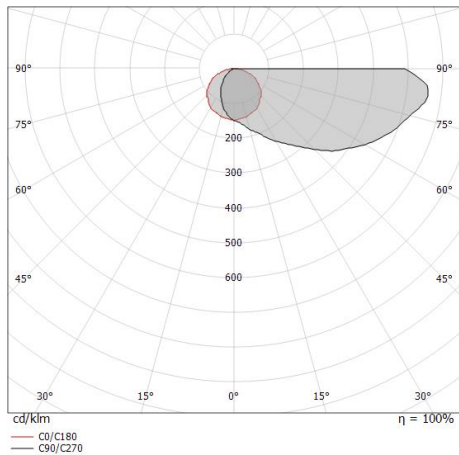

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	69 %
Lichtstrom (Lichtquelle)	426 lm
Leuchten Lichtstrom	296 lm
Consumption	4 W
Leuchten Lichtausbeute	74 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-25 / +45°C
Typische Temperatur am Glas	40°C


LED Life / Failure Ratio

L70 B10 C0 366369h
L80 B10 C0 230187h
L90 B10 C0 110067h

OPTICAL

Optik C0/C180	124°
Light distribution simmetry	Asymmetrical

Envelope_Q | Step Lights | Accessories
76098W07



Einbaugehäuse
installationsposition: wand; typ installation: mauerwerk L=107mm, H=74mm, D=50mm.
Material:Kunststoff, farbe:Black.

Code
98111