



Wandleuchten | 2 arrayLED 11 W DC 630 mA | CRI 80  
**76622M30**



| Technische Daten                                    |                       |
|-----------------------------------------------------|-----------------------|
| Typ                                                 | Oberfläche            |
| Installationsposition                               | Wand                  |
| Installationsumgebung                               | Outdoor               |
| Lichtquelle                                         | LED                   |
| Circuit structure                                   | arrayLED              |
| Optik                                               | Double Medium Flood   |
| Light emission direction                            | downward and upward   |
| Lampe Nennleistung                                  | 11 W DC               |
| Lichtstrom (Lichtquelle)                            | 1292 lm               |
| Eingangsspannungsbereich                            | 630mA                 |
| Ähnlichste Farbtemperatur / Tone                    | 2700 K                |
| Farbwiedergabeindex                                 | 80 Ra                 |
| Gleichstrom/Gleichspannung                          | CC                    |
| Isolierklasse                                       | 3                     |
| IP                                                  | IP65                  |
| IK                                                  | IK08                  |
| Glühdrahtprüfung                                    | 850°                  |
| Direkte Montage auf normal entflammaren Oberflächen | Ja                    |
| CE                                                  | Ja                    |
| Einschließlich Driver                               | Nein                  |
| Leuchte dimmbar                                     | DALI - 1-10V - DALI-2 |
| Schwenkbarkeit                                      | Nein                  |
| Drehbarkeit                                         | Nein                  |
| Begehbarkeit                                        | Nein                  |
| Überrollbarkeit                                     | Nein                  |
| Einschließlich Kabel                                | Nein                  |
| Harzbeschichtung                                    | Nein                  |
| Typ Lichtabstrahlung                                | Zweiflammig           |
| Nettogewicht                                        | 0.8 Kg                |
| Schutz vor elektrostatischen Entladungen            | Nein                  |
| Schutz vor Stoßspannungen                           | Nein                  |

#### Oberfläche Oberfläche Gehäuse

|                 |                                             |
|-----------------|---------------------------------------------|
| Material        | Stranggepresstes Aluminium EN AB - 46100    |
| Farbe           | Dark brown                                  |
| Bearbeitungstyp | Offenporige Anodisierung + Pulverlackierung |

#### Oberfläche Oberfläche diffusor

|                 |                              |
|-----------------|------------------------------|
| Material        | Extra-helles Glas - Gehärtet |
| Farbe           | transparent                  |
| Bearbeitungstyp | Siebdruck                    |

#### Elektronik



99186  
On/Off Driver 198-264V AC (1 - 2 art.)



C-E200002  
Push and Simply Dim - DALI-2 Controller (1 - 2 art.)



C-E200008  
On/Off Driver 198-264V AC / V DC (1 art.)

Wandleuchten | 2 arrayLED 11 W DC 630 mA | CRI 80  
76622M30

Double emission wall lights for outdoor application. The super warm white LED light source with a double medium flood light distribution is composed of 2 arrayled LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 1292 lm, with a 117.5 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.



The device body is made of die-cast aluminium en ab - 46100 and features a dark brown finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP65; the total weight is of 0.8 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 11 W

The device features protection class III and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

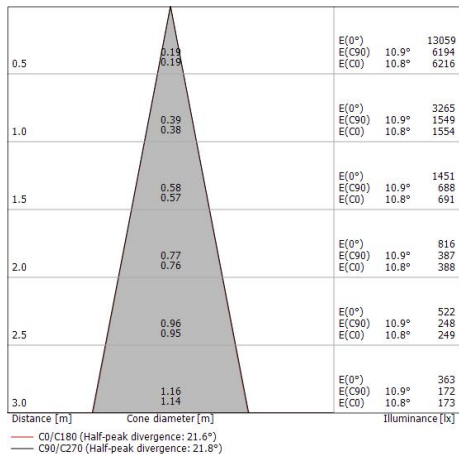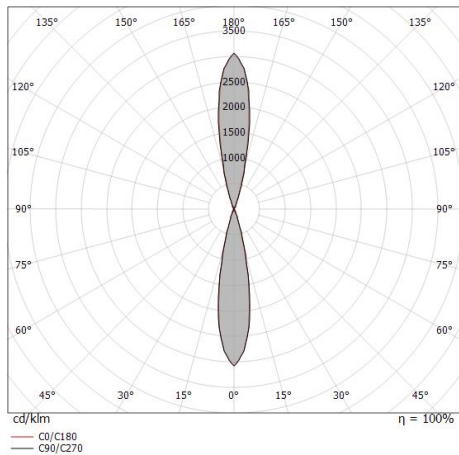

Energieeffizienzklasse

Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

|                                       |                |
|---------------------------------------|----------------|
| Light Output Ratio (LOR)              | 81 %           |
| Lichtstrom (Lichtquelle)              | 1292 lm        |
| Leuchten Lichtstrom                   | 1059 lm        |
| Consumption                           | 11 W           |
| Leuchten Lichtausbeute                | 96 lm/W        |
| Farbtemperatur                        | 2700 K         |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex                   | 80 Ra          |
| Standardumgebungstemperatur           | -20 / +50°C    |
| Typische Temperatur am Glas           | 40°C           |

LED Life / Failure Ratio

L70 B10 C0 314051h (at Tj 65 Ta 25 )

L80 B10 C0 196584h (at Tj 65 Ta 25 )

L90 B10 C0 92791h (at Tj 65 Ta 25 )

UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 9.2      |
| UGR transversal   | 10.1     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

OPTICAL

|                             |             |
|-----------------------------|-------------|
| Optik C0/C180               | 22°         |
| Light distribution simmetry | Symmetrical |