Scheinwerfer | 198-264 V
1 arrayLED 12.5 W DC - 14 W AC | CRI 98
77063W60







Technische Daten	
Typ	Schiene
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Wide Flood
Light emission direction	frontal
Lampe Nennleistung	12.5 W DC
Gesamtleistung	14 W
Lichtstrom (Lichtquelle)	2263 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	98 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Bluetooth
Schwenkbarkeit	Orientabile
Gesamtwinkel (vertikale Ebene)	90 °
Gesamtwinkel (horizontale Ebene)	360 °
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.496 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	1 KV

Oberfläche Oberfläche Gehäuse	
Material	Stranggepresstes Aluminium EN AB - 46100
Farbe	Text black RAL9005
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Technology Partner
SILVAIR

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Scheinwerfer | 198-264 V | 1 arrayLED 12.5 W DC - 14 W AC | CRI 98
77063W60

Single emission projectors for indoor application. The warm white LED light source is composed of 1 arrayled LEDs with CCT of 3000 K and a CRI 98; the source luminous flux is 2263 lm, with a 181.0 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP20; the total weight is of 0.496 kg.

The total absorbed power is 14 W

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	57 %
Lichtstrom (Lichtquelle)	2263 lm
Leuchten Lichtstrom	1302 lm
Consumption	14 W
Leuchten Lichtausbeute	93 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	98 Ra
Black Body Locus	On
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio
L70 B10 C0 237566h (at Tj 65 Ta 25)
L80 B10 C0 148737h (at Tj 65 Ta 25)
L90 B10 C0 70385h (at Tj 65 Ta 25)

UGR	
UGR axial	19.3
UGR transversal	19.3
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	49°
Light distribution simmetry	Symmetrical

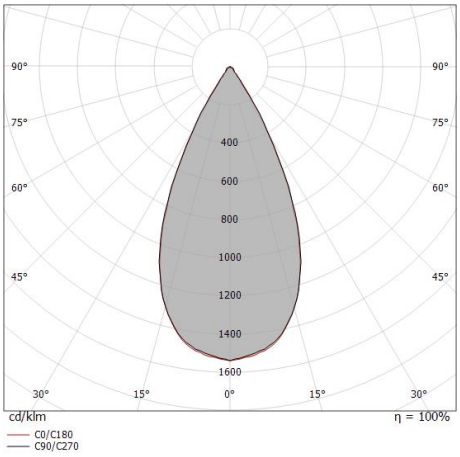

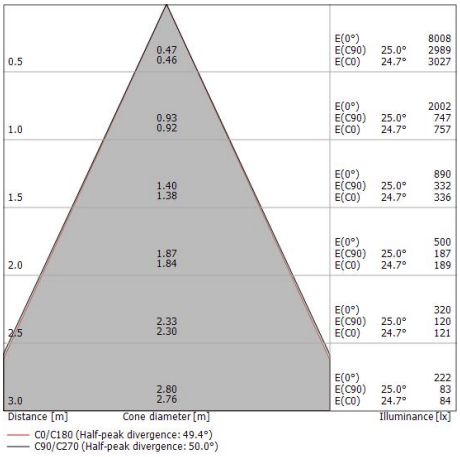



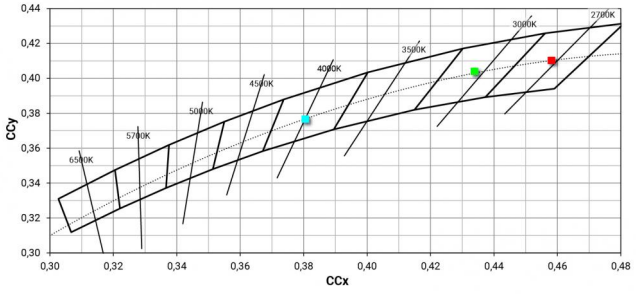

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77063W60





Stromversorgung
Material:PC, farbe:Weiß.

Code
81033





Stromversorgung
Material:PC, farbe:Weiß.

Code
81036





Stromversorgung
Material:PC, farbe:Black.

Code
81037





Stromversorgung
Material:PC, farbe:Black.

Code
81034



Endkappe
Material:PC, farbe:Weiß.

Code
80999



Endkappe
Material:PC, farbe:Black.

Code
81000



Endkappe
Material:PC, farbe:Weiß.

Code
81002





Endkappe
Material:PC, farbe:Black.

Code
81003

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77063W60




Endkappe
Material:Weiß.

Code
81084




Endkappe
Material:Schwarz, farbe:Black.

Code
81085



Deckenrosette - Weißes Aufhängungsset 1,5 m + Halterung (9000-KIT5-1,5-W)
Einschließlich Driver: Nein.
Material:Kunststoff, farbe:Weiß.

Code
81012




Deckenrosette - Schwarzes Aufhängungsset 1,5 m + Halterung (9000-KIT5-1,5-B)
Einschließlich Driver: Nein.
Material:Kunststoff, farbe:Black.

Code
81014




Deckenrosette - Weißes Aufhängungsset 5 m + Halterung (9000-KIT5-5-W)
Einschließlich Driver: Nein.
Material:Kunststoff, farbe:Weiß.

Code
81013



Deckenrosette - Schwarzes Aufhängungsset 5 m + Halterung (9000-KIT5-5-B)
Einschließlich Driver: Nein.
Material:Kunststoff, farbe:Black.

Code
81015




Klammer
L=35mm, H=14mm, D=24mm.
Material:Aluminium, farbe:Polished aluminium.

Code
81086




Klammer
L=180mm, H=24mm, D=26mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
81024

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77063W60





Klammer
L=180mm, H=24mm, D=20mm.
Material:Aluminium, farbe:Weiß RAL 9010, bearbeitungstyp :Lackierung.

Code
81025





Klammer
L=180mm, H=24mm, D=20mm.
Material:Aluminium, farbe:Schwarz RAL 9005, bearbeitungstyp :Lackierung.

Code
81026





Klammer
L=35mm, H=14mm, D=24mm.
Material:Aluminium, farbe:Weiß, bearbeitungstyp :Lackierung.

Code
81087





Klammer
L=35mm, H=14mm, D=24mm.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
81088





Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81039





Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81040





Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81042





Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81045

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77063W60




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81048




Kabelverbindung
Typ flexible curve.
Material:PC, farbe:Weiß.

Code
81066




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81063




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81051




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81054




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81057




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81060




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81043

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77063W60




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81046




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81049




Kabelverbindung
Typ flexible curve.
Material:PC, farbe:Black.

Code
81067




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81064




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81052




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81055




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81058




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81061

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77063W60



Hängeleuchten
Material:Kunststoff, farbe:Weiß.

Code
81006



Hängeleuchten
Material:Kunststoff, farbe:Weiß.

Code
81007





Hängeleuchten
Material:Kunststoff, farbe:Black.

Code
81008





Hängeleuchten
Material:Kunststoff, farbe:Black.

Code
81009



Hängeleuchten
Material:Kunststoff, farbe:Weiß.

Code
81018



Hängeleuchten
Material:Kunststoff, farbe:Black.

Code
81019



Hängeleuchten
Material:Kunststoff, farbe:Weiß.

Code
81021



Hängeleuchten
Material:Kunststoff, farbe:Black.

Code
81022

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77063W60




Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81069




Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81072




Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81075




Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81078




Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81081




Drahtabdeckung
Material:PC, farbe:Black.

Code
81070




Drahtabdeckung
Material:PC, farbe:Black.

Code
81073




Drahtabdeckung
Material:PC, farbe:Black.

Code
81076

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77063W60




Drahtabdeckung
Material:PC, farbe:Black.

Code
81079




Drahtabdeckung
Material:PC, farbe:Black.

Code
81082

Drahtabdeckung
Material:Weiß.

Code
83249



Drahtabdeckung
Material:Schwarz, farbe:Black.

Code
83250




Code
81094




Code
81091




Code
81095




Code
81093

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77063W60



Werkzeug - Schneidezange S?9000/T
Material:Gummi, farbe:Black.

Code
81005





Schiene
Länge: 1000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
80990





Schiene
Länge: 2000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
80991





Schiene
Länge: 3000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
80992





Schiene
Länge: 1000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
80993





Schiene
Länge: 2000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
80994





Schiene
Länge: 3000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
80995





Schiene
Länge: 1000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
83336

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77063W60




Schiene
Länge: 2000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
83337




Schiene
Länge: 3000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
83338




Schiene
Länge: 1000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
83339




Schiene
Länge: 2000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
83340




Schiene
Länge: 3000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
83341




Blendschutz - Zubehör für Fokal-Kit mit Code 83347.
Blendschutzart: wabenraster.
Material:Pom-C, farbe:Schwarz.

Code
99841



Blendschutz
Blendschutzart: filtro ellittico.
Material:Pom-C, farbe:Schwarz.

Code
83345



Blendschutz
Blendschutzart: frangiluce a croce.
Material:Pom-C, farbe:Schwarz.

Code
83344

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories
77063W60



Blendschutz
Blendschutzart: schermo cilindrico 45°.
Material:Pom-C, farbe:Schwarz.

Code
83343



Blendschutz
Blendschutzart: wabenraster.
Material:Pom-C, farbe:Schwarz.

Code
83346



Blendschutz
Blendschutzart: schermo cilindrico.
Material:Pom-C, farbe:Schwarz.

Code
83342



Optik
Lichtverteilung: spot,Material Verkleidung: uv beständiges polycarbonat

Code
83348



Optik
Lichtverteilung: medium flood,Material Verkleidung: uv beständiges polycarbonat

Code
83349



Optik - Kit mit variabler Brennweite
Lichtverteilung: einstellbar,Material Verkleidung: aluminium

Code
83347



Optik
Lichtverteilung: flood,Material Verkleidung: uv beständiges polycarbonat

Code
83350

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Schaltplan

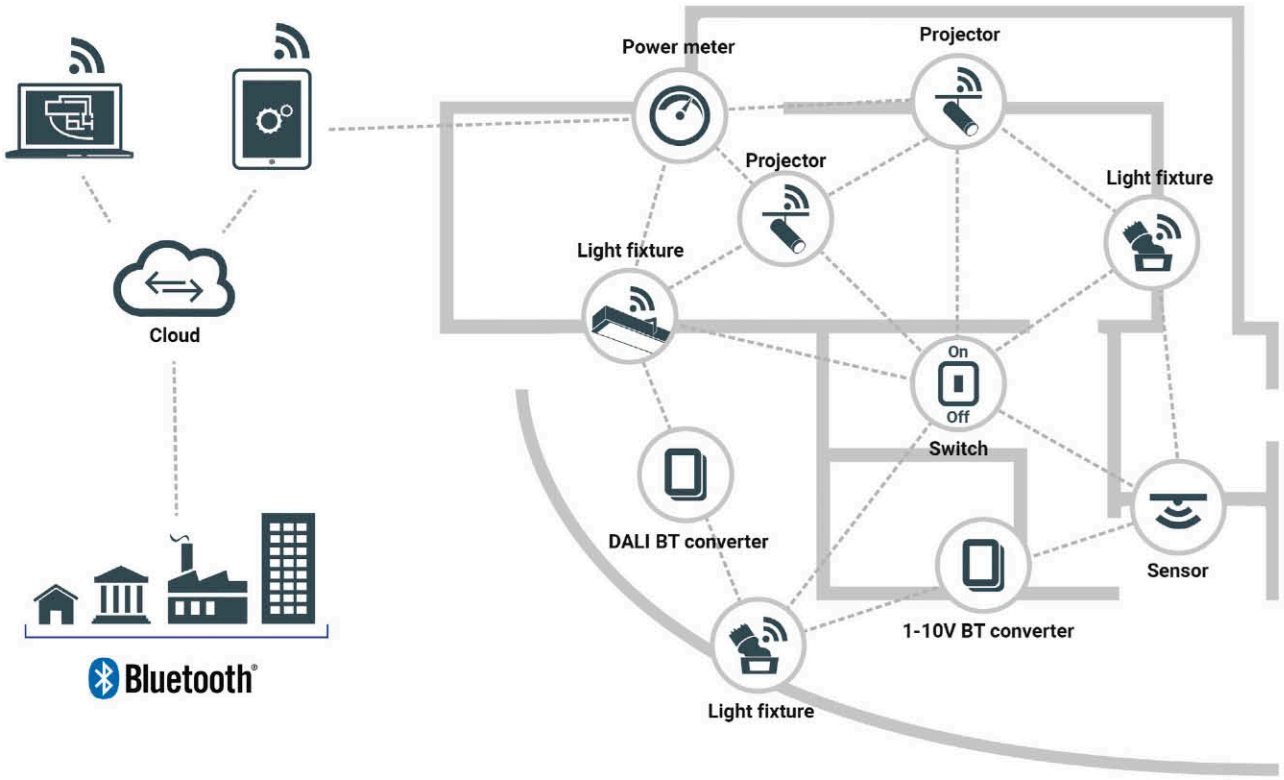

Identifikation des Geräts

Beim ersten Einschalten des Geräts und bei jedem Reset führt das System einen Vorgang zum Identifizieren der Leuchte durch. Der Identifikationsvorgang besteht aus einer als „Attention event" definierten Animation mit 40% Helligkeit für 500 ms, 100% Helligkeit für 500 ms. Auch die blaue LED-Statusanzeige blinkt während des Identifikationsvorgangs mit 500 ms ON/500 ms OFF.

Wiederherstellung der Werkeinstellungen des Bluetooth-Geräts

Wenn das Gerät auf die Werkeinstellungen zurückgesetzt wird, wechselt der Status des Moduls im Mesh-Netz von verbunden auf nicht verbunden, das heißt, alle Netzeinstellungen gehen verloren. Diese Funktion ist notwendig, um die Verbindung eines Geräts nach einem unvorhergesehenen Verhalten, bei dem man die Kontrolle des Geräts verliert, wiederherzustellen.
Um das Bluetooth-Gerät wieder auf die Werkeinstellungen zurückzusetzen, reicht es aus, einen Magneten in Kontakt mit dem auf dem Gehäuse des Bluetooth-Moduls angezeigten Symbol zu bringen. Lassen Sie den Magneten für 5 Sekunden auf der Kontaktfläche. Sobald die Werkeinstellungen wieder hergestellt sind, führt das System einen Identifikationsvorgang am Gerät durch.

Antenne

Die Antenne ist in den Artikel eingebaut.

Blinken der LED

Die blaue LED-Statusanzeige auf dem Gehäuse, das die Bluetooth-Schnittstelle enthält, blinkt je nach dem Status, in dem die Leuchte sich befindet, anders.

Schnelles Blinken / langsames Blinken

Die LED blinkt schnell, wenn die Leuchte nicht mit dem Netz verbunden ist (alle 300 ms). Die LED blinkt langsam, wenn die Leuchte mit dem Netz verbunden ist (alle 2 s).

Leuchte nicht verbunden



Leuchte verbunden



Blinken während des Zurücksetzens auf die Werkeinstellungen (Reset)



Empfang eines Mesh-Pakets



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Sonstige Informationen

- Die Wireless-Leistung kann, besonders von den Metallflächen, beeinträchtigt werden. In diesen Situationen muss die Wireless-Leistung geprüft werden.
- Wenn das Gerät mit keinem Netz verbunden ist, dauert es ungefähr 30 Sekunden nach dem Einschalten, bis es als verfügbares Gerät angezeigt wird.
- Das Gerät hat das SILVAIR-Testverfahren bestanden
- Es unterstützt die Schalter EnOcean 83017
- Es unterstützt die Sensoren Murata 83016
- Das Gerät kann mit der SILVAR-Inbetriebnahme-App, die im App-Store des Smartphones oder Tablets erhältlich ist, in Betrieb gesetzt werden.
- Sehen Sie für mehr Informationen in die SILVAIR-Anleitung unter dem folgenden Link: **https://silvair.com/resources/product-documents/**
- Linea Light haftet für kein Inbetriebnahme-Instrument von Dritten und liefert weder eine ausdrückliche noch implizierte Erklärung zur Verfügbarkeit und/oder zu den Leistungen eines solchen Inbetriebnahme-Instruments.

POUND_T
POUND FOCUS

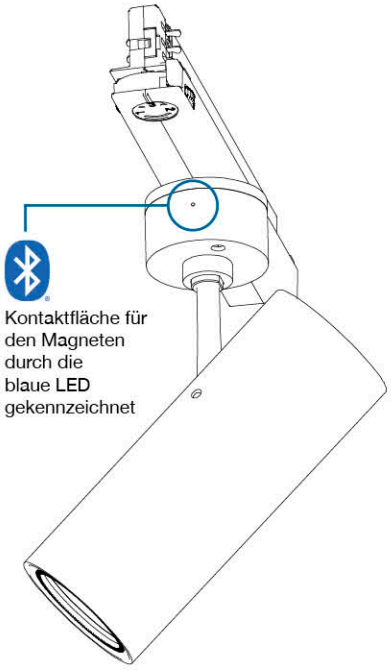

POUND SHAPER

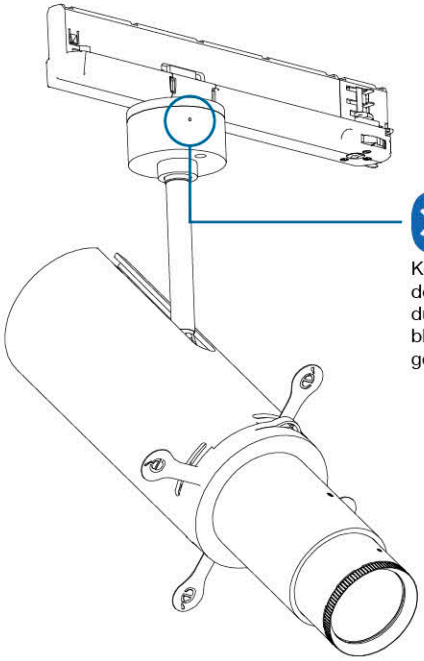

OPTUS_T

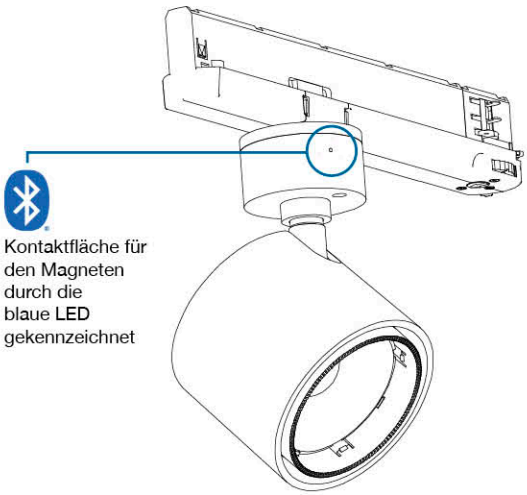

OPTUS_Ww

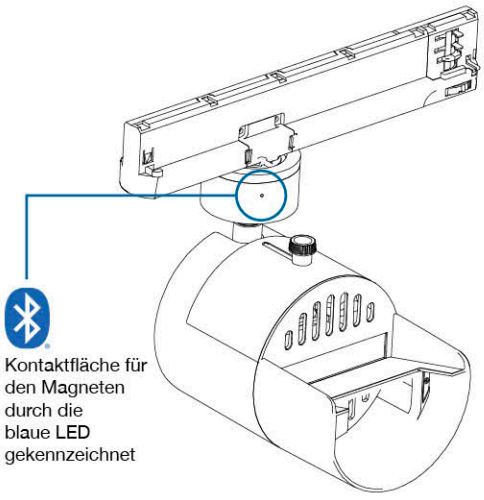

Base
NAVATA OPTUS
NAVATA POUND
SHAPER

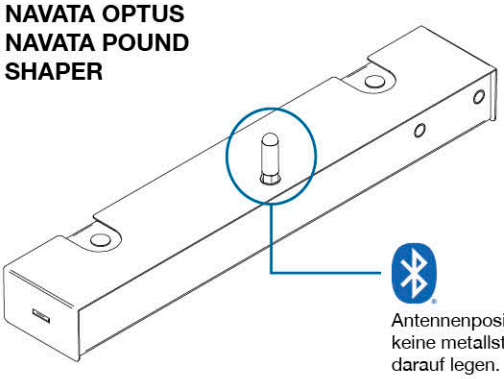

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.