

Stehleuchten - Poller & Mastaufsatzleuchten | 220-240 V | 40 topLED 9 W DC - 10 W AC |
CRI 90
77099M00

Single emission floor lamp or bollard & pole for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 40 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 1316 lm, with a 146.2 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a text black ral9005 finish, processed by means of coating; the diffuser is made of pmma.

The ingress protection degree is IP65; the total weight is of 0.580 kg.

The total absorbed power is 10 W

The device features protection class I and can be floor-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

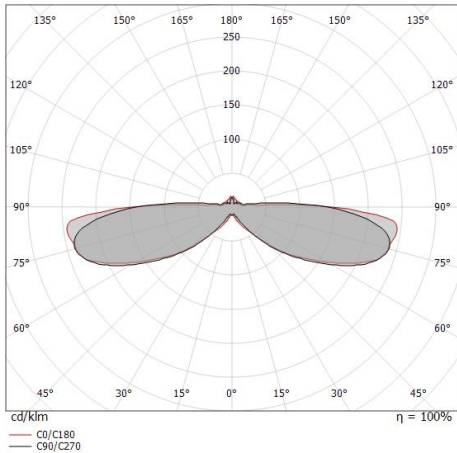

Energieeffizienzklasse	
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.	
Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	22 %
Lichtstrom (Lichtquelle)	1316 lm
Leuchten Lichtstrom	300 lm
Consumption	10 W
Leuchten Lichtausbeute	30 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
UV-C Power	1,0 W
Standardumgebungstemperatur	-20 / +50°C
LED Life / Failure Ratio	
L70 B10 C0 102000h (at Tj 115 Ta 25)	
L90 B10 C0 55000h	
UGR	
UGR axial	24.6
UGR transversal	24.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	180°
Light distribution simmetry	Symmetrical

Stehleuchten - Poller & Mastaufsatzleuchten | 220-240 V | 40 topLED 9 W DC - 10 W AC | CRI 90
77099M00


Components



Rolling Sky | Sphere - Paletti e teste palo

Code

C-D100001




Rolling Sky | Amphora - Paletti e teste palo

Code

C-D100004

Rolling Sky | Bollard & Pole | Accessories
77099M00



Erdspießen
installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

Code
14931