

Stehleuchten - Poller & Mastaufsatzleuchten | 220-240 V | 40 topLED 9 W DC - 10 W AC |
CRI 90
77099W00

Single emission floor lamp or bollard & pole for outdoor application. The warm white LED light source with a diffused light distribution is composed of 40 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1385 lm, with a 153.9 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a text black ral9005 finish, processed by means of coating; the diffuser is made of pmma.

The ingress protection degree is IP65; the total weight is of 0.580 kg.

The total absorbed power is 10 W

The device features protection class I and can be floor-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

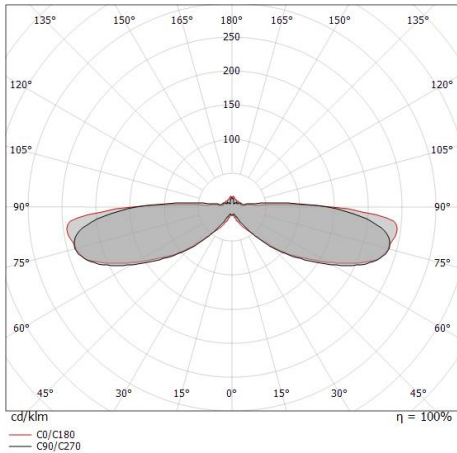

Energieeffizienzklasse	
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.	
Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	23 %
Lichtstrom (Lichtquelle)	1385 lm
Leuchten Lichtstrom	322 lm
Consumption	10 W
Leuchten Lichtausbeute	32 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C
LED Life / Failure Ratio	
L70 B10 C0 102000h (at Tj 115 Ta 25)	
L90 B10 C0 55000h	
UGR	
UGR axial	24.9
UGR transversal	24.8
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	180°
Light distribution simmetry	Symmetrical


Stehleuchten - Poller & Mastaufsatzleuchten | 220-240 V | 40 topLED 9 W DC - 10 W AC | CRI 90
77099W00

Components



Rolling Sky | Sphere - Paletti e teste palo


Code
C-D100001



Rolling Sky | Amphora - Paletti e teste palo

Code
C-D100004

Rolling Sky | Bollard & Pole | Accessories
77099W00



Erdspießen
installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

Code
14931