

Stehleuchten - Poller & Mastaufsatzleuchten | 198-264 V | 63 topLED 15 W DC - 17 W AC |
CRI 90
77101M00

Single emission floor lamp or bollard & pole for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 63 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 1987 lm, with a 132.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text black ral9005 finish, processed by means of coating; the diffuser is made of pmma.


The ingress protection degree is IP65; the total weight is of.980 kg.

The total absorbed power is 17 W

The device features protection class I and can be floor-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse	
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.	
Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	23 %
Lichtstrom (Lichtquelle)	1987 lm
Leuchten Lichtstrom	470 lm
Consumption	17 W
Leuchten Lichtausbeute	27 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C
LED Life / Failure Ratio	
L70 B10 C0 102000h (at Tj 115 Ta 25)	
L90 B10 C0 55000h	
OPTICAL	
Optik C90/C270	173°
Optik C0/C180	178°
Light distribution simmetry	Symmetrical 2 assis

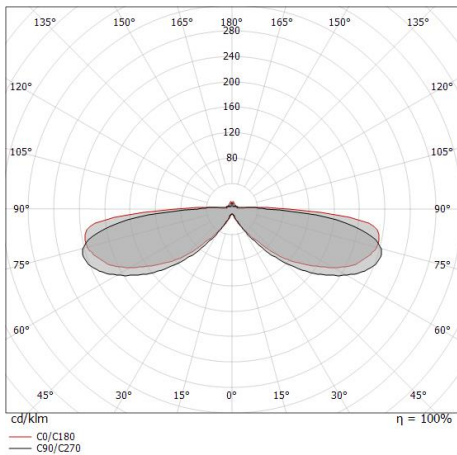


Stehleuchten - Poller & Mastaufsatzleuchten | 198-264 V | 63 topLED 15 W DC - 17 W AC | CRI 90
77101M00

Components



Rolling Sky | Sphere - Paletti e teste palo


Code
C-D100002



Rolling Sky | Amphora - Paletti e teste palo

Code
C-D100005

Rolling Sky | Bollard & Pole | Accessories
77101M00



Erdspießen
installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

Code
14931