

Uplights | 1 x powerLED 2 W DC 600 mA | CRI 80 77279N15

Single emission uplights for outdoor application. The natural white LED light source with a spot light distribution is composed of 1 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 266 lm, with a 133.0 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.



The device body is made of aisi 316 stainless steel and features a steel finish; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The robust steel structure enhances the fixture's design and ensures long-lasting performance, even in the most demanding environments.

The ingress protection degree is IP67; the total weight is of 0.24 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 2 W The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code C-C100001(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

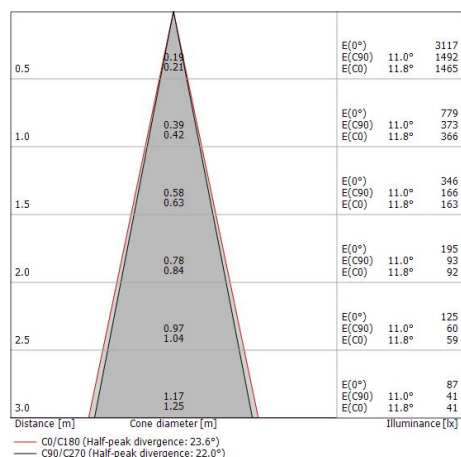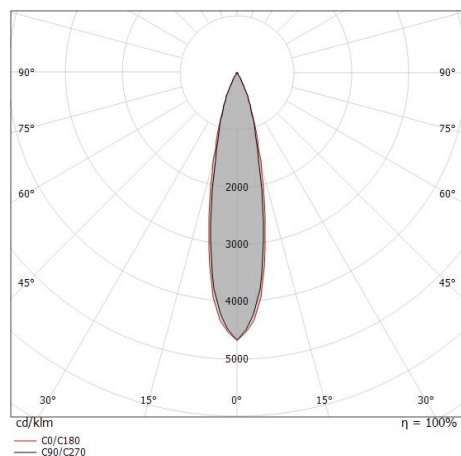

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	62 %
Lichtstrom (Lichtquelle)	266 lm
Leuchten Lichtstrom	167 lm
Consumption	2,0 W
Leuchten Lichtausbeute	83 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	50°C

LED Life / Failure Ratio

L70 B10 C0 1240219h (at Tj 65 Ta 25)

L80 B10 C0 745627h (at Tj 65 Ta 25)

L90 B10 C0 309367h (at Tj 65 Ta 25)

UGR

UGR axial	21.3
UGR transversal	21.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	22°
Light distribution symmetry	Symmetrical

Orma_QF | Uplights | Accessories
77279N15



Einbaugehäuse
installationsposition: boden; typ installation: mauerwerk L=75mm, H=97mm, D=75mm.
Material:Kunststoff ABS, farbe:Black.

Code
C-C100001