# Quad_W

Wandleuchten | 198-264 V
21 topLED 9 W DC - 11 W AC | CRI 90
**7753M**

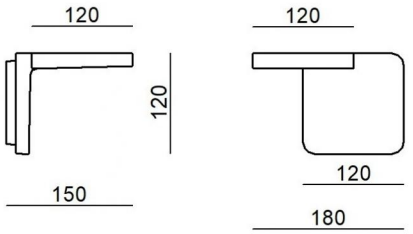


| Technische Daten | |
|---|---|
| Designer | Pio e Tito Toso |
| Jahr der Verwirklichung | 2016 |
| Typ | Wandleuchten |
| Installationsposition | Wand |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Diffuses |
| Light emission direction | upward |
| Lampe Nennleistung | 9 W DC |
| Gesamtleistung | 11 W |
| Lichtstrom (Lichtquelle) | 1236 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 198 - 264 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 2700 K |
| Farbwiedergabeindex | 90 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 1 |
| IP | IP40 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | Phase cut |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Nein |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.7 Kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminium |
| Farbe | Text black RAL9005 |
| Bearbeitungstyp | Lackierung |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | PC |
| Farbe | Transparent |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Wandleuchten | 198-264 V | 21 topLED 9 W DC - 11 W AC | CRI 90
**7753M**

Single emission wall lights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 21 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 1236 lm, with a 137.3 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text black ral9005 finish, processed by means of coating; the diffuser is made of PC.

The ingress protection degree is IP40; the total weight is of 0.7 kg.

The total absorbed power is 11 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 88 % |
| Lichtstrom (Lichtquelle) | 1236 lm |
| Leuchten Lichtstrom | 1097 lm |
| Consumption | 11 W |
| Leuchten Lichtausbeute | 99 lm/W |
| Farbtemperatur | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Verbindungstemperatur (Leuchte) | 80 |
| Standardumgebungstemperatur | 25°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 102000h (at Tj 115  Ta 25 ) |
| L90 B10 C0 55000h |

| UGR | |
|---|---|
| UGR axial | 30.9 |
| UGR transversal | 30.9 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C0/C180 | 112° |
| Light distribution simmetry | Symmetrical |

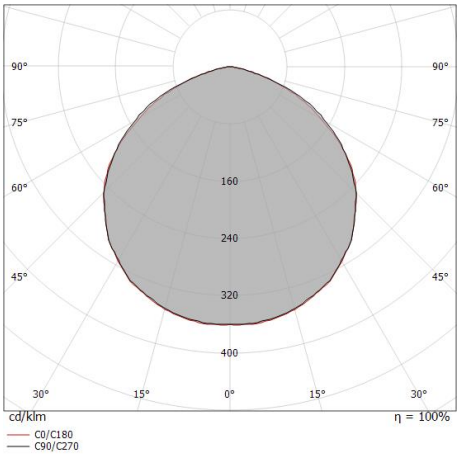


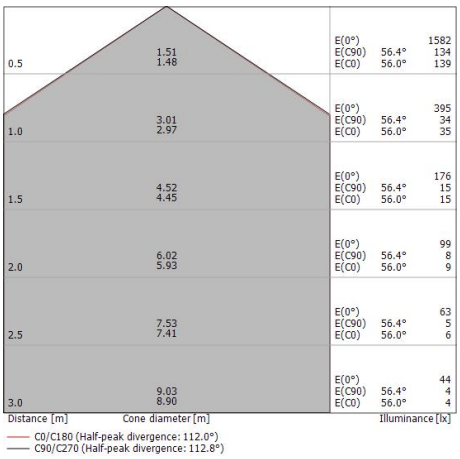




Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Quad_W | Wall Lights | Accessories
**7753M**




Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

**Code**
KIT0026




Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi Radio-frequenza, 85-240V

**Code**
KIT0080



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.