



Pendelleuchte | 220-240 V
108 topLED 93 W DC | CRI 90
7788N



Technische Daten	
Jahr der Verwirklichung	2017
Typ	Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward and upward
Lampe Nennleistung	93 W DC
Gesamtleistung	96 W
Lichtstrom (Lichtquelle)	12644 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	4000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI - PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	6 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	11.2 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Metall
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PE
Farbe	Natural polyethylene

Pendelleuchte | 220-240 V | 108 topLED 93 W DC - 96 W AC | CRI 90
7788N

Single emission pendant luminaires for indoor application. The natural white LED light source with a diffused light distribution is composed of 108 topLEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 12644 lm, with a 136.0 lm/W nominal luminous efficacy.


The device body is made of metal and features a text white ral9003 finish, processed by means of coating; the diffuser is made of pe.

The ingress protection degree is IP20; the total weight is of 11.2 kg.

The total absorbed power is 96 W The power supply cable is included and features a 6 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

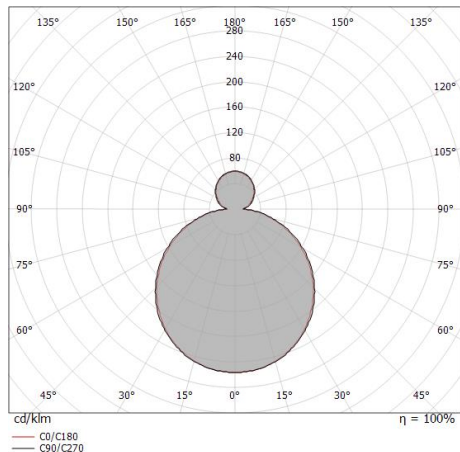


Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.64 1.58	E(0°) 12282 E(C90) 871 E(C0) 937
1.0	3.28 3.16	E(0°) 3070 E(C90) 218 E(C0) 234
1.5	4.91 4.75	E(0°) 1365 E(C90) 97 E(C0) 104
2.0	6.55 6.33	E(0°) 768 E(C90) 54 E(C0) 59
2.5	8.19 7.91	E(0°) 491 E(C90) 35 E(C0) 37
3.0	9.83 9.49	E(0°) 341 E(C90) 24 E(C0) 26

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 115.4°)
— C90/C270 (Half-peak divergence: 117.2°)

Energieeffizienzklasse	
Dieses Produkt enthält 18 Lichtquellen der Energieeffizienzklasse E.	
Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	94 %
Lichtstrom (Lichtquelle)	12644 lm
Leuchten Lichtstrom	11985 lm
Consumption	96 W
Leuchten Lichtausbeute	124 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C
UGR	
UGR axial	19.9
UGR transversal	19.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	115°
Light distribution simmetry	Symmetrical

Mr.Magoo_P | Pendant Luminaires | Accessories
7788N



Dimmer - 0-10V, 1-10V oder DALI-Dimmschnittstelle
Bluetooth, 220-240V

Code

KIT0079