
STILNOVO

Mr.Magoo_S

Wandleuchten - Deckenleuchten | 220-240 V
108 topLED 93 W DC - 96 W AC | CRI 90
7789







Technische Daten	
Designer	Mirco Crosatto
Jahr der Verwirklichung	2010
Typ	Wandleuchten - Deckenleuchten
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward and upward
Lampe Nennleistung	93 W DC
Gesamtleistung	96 W
Lichtstrom (Lichtquelle)	11734 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI-2 - PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	10.2 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Metall
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PE
Farbe	Natural polyethilene

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Wandleuchten - Deckenleuchten | 220-240 V | 108 topLED 93 W DC - 96 W AC | CRI 90
7789

Double emission wall lights or ceiling downlights for indoor application. The warm white LED light source with a diffused light distribution is composed of 108 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 11734 lm, with a 126.2 lm/W nominal luminous efficacy.

The device body is made of metal and features a text white ral9003 finish, processed by means of coating; the diffuser is made of pe.

The ingress protection degree is IP40; the total weight is of 10.2 kg.

The total absorbed power is 96 W

The device features protection class I and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 18 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	92 %
Lichtstrom (Lichtquelle)	11734 lm
Leuchten Lichtstrom	10894 lm
Consumption	96 W
Leuchten Lichtausbeute	113 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B10 C0 100000h
L80 B20 C0 80000h
L90 B10 C0 60000h

UGR	
UGR axial	19.5
UGR transversal	19.3
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	115°
Light distribution simmetry	Symmetrical

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Wandleuchten - Deckenleuchten | 220-240 V | 108 topLED 93 W DC - 96 W AC | CRI 90

7789

Double emission wall lights or ceiling downlights for indoor application. The warm white LED light source with a diffused light distribution is composed of 108 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 11734 lm, with a 126.2 lm/W nominal luminous efficacy.

The device body is made of metal and features a text white ral9003 finish, processed by means of coating; the diffuser is made of pe.

The ingress protection degree is IP40; the total weight is of 10.2 kg.

The total absorbed power is 96 W

The device features protection class I and can be wall lights or ceiling-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält 18 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	92 %
Lichtstrom (Lichtquelle)	11734 lm
Leuchten Lichtstrom	10894 lm
Consumption	96 W
Leuchten Lichtausbeute	113 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B10 C0 100000h
L80 B20 C0 80000h
L90 B10 C0 60000h


UGR	
UGR axial	19.5
UGR transversal	19.3
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

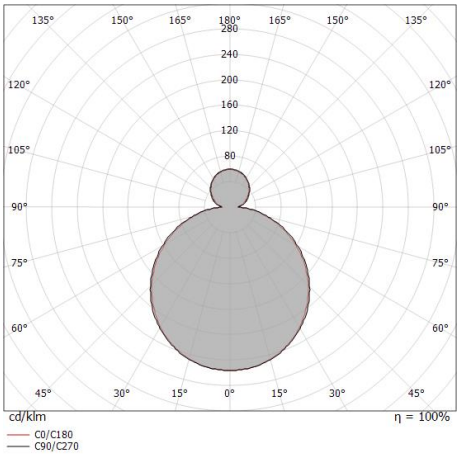


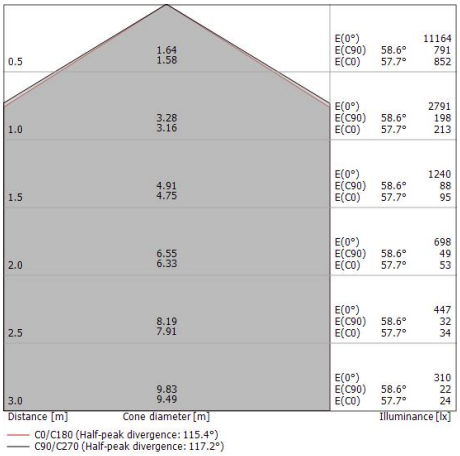

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Mr.Magoo_S | Ceiling Downlights | Accessories
7789





Dimmer - 0-10V, 1-10V oder DALI-Dimmschnittstelle
Bluetooth, 220-240V

Code
KIT0079

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.