


Wandleuchten - Deckenleuchten | 220-240 V | topLED 24 W DC - 28 W AC | CRI 90
7907

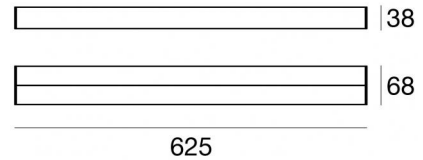

Technische Daten	
Typ	Oberfläche - Oberfläche
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	24 W DC
Gesamtleistung	28 W
Lichtstrom (Lichtquelle)	3030 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP44
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	0.9 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Ja

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Anodised aluminium
Bearbeitungstyp	Eloxierung

Oberfläche Oberfläche diffusor	
Material	PC
Farbe	Opal

Wandleuchten - Deckenleuchten | 220-240 V | topLED 24 W DC - 28 W AC | CRI 90
7907

Double emission wall lights or ceiling downlights for indoor application. The warm white LED light source with a diffused light distribution is composed of 72 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3030 lm, with a 126.3 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a anodised aluminium finish, processed by means of anodisation; the diffuser is made of PC. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance.

The ingress protection degree is IP44; the total weight is of 0.9 kg.

The total absorbed power is 28 W

The device features protection class I and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	66 %
Lichtstrom (Lichtquelle)	3030 lm
Leuchten Lichtstrom	2030 lm
Consumption	28 W
Leuchten Lichtausbeute	72 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio

L70 B10 C0 102000h (at Tj 115 Ta 25)


L90 B10 C0 55000h

UGR

UGR axial	19.4
UGR transversal	18.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C90/C270	174°
Optik C0/C180	102°
Light distribution simmetry	Symmetrical 2 assis

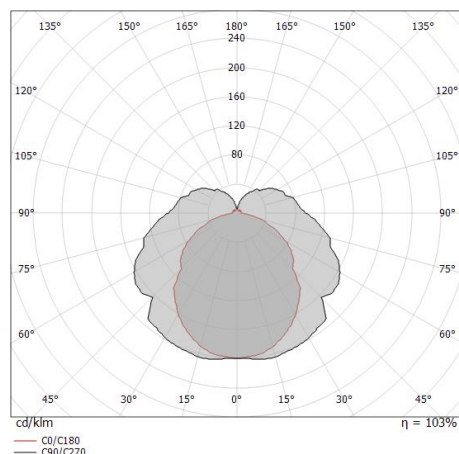

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	19.08 1.23	E(0°) 1620 E(C90) 0 E(C0) 205
1.0	38.16 2.45	E(0°) 405 E(C90) 0 E(C0) 51
1.5	57.24 3.68	E(0°) 180 E(C90) 0 E(C0) 23
2.0	76.32 4.90	E(0°) 101 E(C90) 0 E(C0) 13
2.5	95.41 6.13	E(0°) 65 E(C90) 0 E(C0) 8
3.0	114.49 7.36	E(0°) 45 E(C90) 0 E(C0) 6

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 101.6°)
— C90/C270 (Half-peak divergence: 174.0°)