
Skinny

Wandleuchten | 220-240 V | 72 topLED 24 W DC - 28 W AC | CRI 90
7911





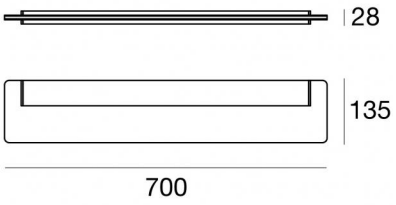

Technische Daten	
Typ	Oberfläche
Installationsposition	Wand
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	24 W DC
Gesamtleistung	28 W
Lichtstrom (Lichtquelle)	3032 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP44
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.96 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Ja

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Anodised aluminium
Bearbeitungstyp	Eloxierung

Oberfläche Oberfläche diffusor	
Material	PMMA
Farbe	Weiß
Bearbeitungstyp	Siebdruck

Oberfläche Oberfläche fassung	
Material	Eisen
Farbe	Polished pure white (R9016)
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Wandleuchten | 220-240 V | 72 topLED 24 W DC - 28 W AC | CRI 90
7911

Single emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 72 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3032 lm, with a 126.3 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a anodised aluminium finish, processed by means of anodisation; the diffuser is made of pmma with a silk-screening treatment; the mounting frame is made of iron, with a polished pure white (r9016) finish, processed by means of coating. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long?term resistance.

The ingress protection degree is IP44; the total weight is of 0.96 kg.

The total absorbed power is 28 W


The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	64 %
Lichtstrom (Lichtquelle)	3032 lm
Leuchten Lichtstrom	1968 lm
Consumption	28 W
Leuchten Lichtausbeute	70 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B10 C0 102000h (at Tj 115 Ta 25)
L90 B10 C0 55000h

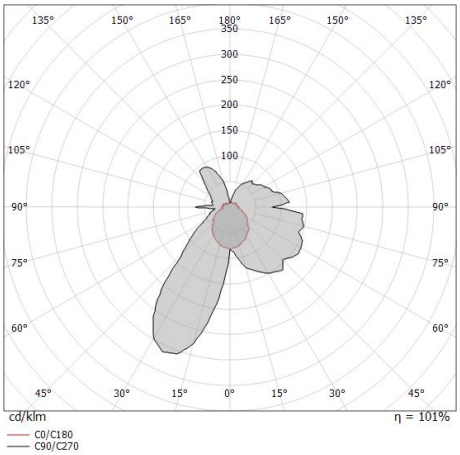

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.