
Beebo_W

Wandleuchten - Scheinwerfer | 220-240 V | 1 arrayLED 4 W DC - 5 W AC | CRI 90
7974







Technische Daten	
Typ	Oberfläche - Scheinwerfer - Oberfläche
Installationsposition	Wand
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Medium Flood
Light emission direction	frontal
Lampe Nennleistung	4 W DC
Gesamtleistung	5 W
Lichtstrom (Lichtquelle)	627 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
IP optisches System	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Orientabile
Gesamtwinkel (vertikale Ebene)	90 °
Gesamtwinkel (horizontale Ebene)	350 °
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.645 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Ja

Oberfläche Oberfläche Gehäuse	
Material	Holz
Farbe	Eiche

Oberfläche Oberfläche diffusor	
Material	PC
Farbe	Transparent

Oberfläche Oberfläche fassung	
Material	Aluminium
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Beebo_W

Wandleuchten - Scheinwerfer | 220-240 V | 1 arrayLED 4 W DC - 5 W AC | CRI 90
7974

Single emission wall lights, projectors or projectors for indoor application. The warm white LED light source with a medium flood light distribution is composed of 1 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 627 lm, with a 156.8 lm/W nominal luminous efficacy.

The device body is made of wood and features a oak finish; the diffuser is made of PC; the mounting frame is made of aluminium, with a text white ral9003 finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 0.645 kg.

The total absorbed power is 5 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	69 %
Lichtstrom (Lichtquelle)	627 lm
Leuchten Lichtstrom	433 lm
Consumption	5 W
Leuchten Lichtausbeute	86 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B10 C0 296960h
L80 B10 C0 200000h
L90 B10 C0 150000h

UGR	
UGR axial	20.7
UGR transversal	20.2
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	38°
Light distribution simmetry	Symmetrical

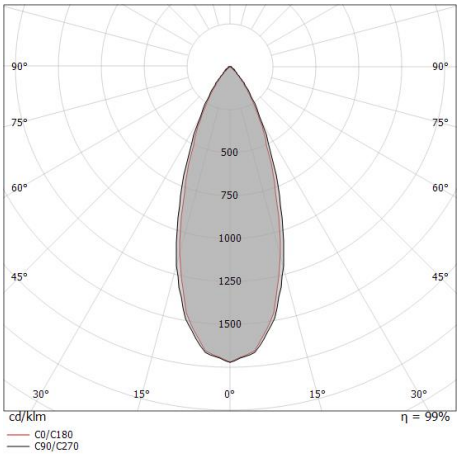

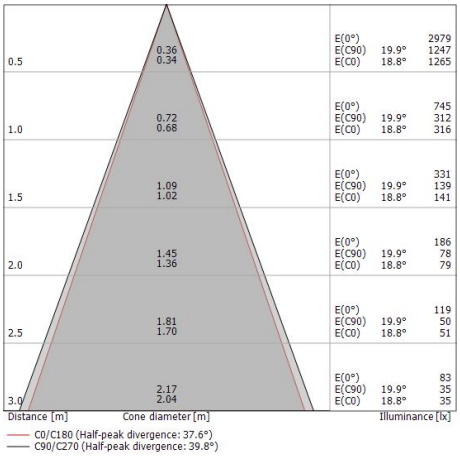

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.