

Wandleuchten - Deckenleuchten | 220-240 V | 104 topLED 19 W DC - 23 W AC | CRI 90
8006M

Double emission wall lights or ceiling downlights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 104 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2080 lm, with a 109.5 lm/W nominal luminous efficacy.



The device body is made of aluminium and features a text white ra9003 finish, processed by means of coating; the diffuser is made of pe.

The ingress protection degree is IP40; the total weight is of 2.54 kg.

The total absorbed power is 23 W


The device features protection class I and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

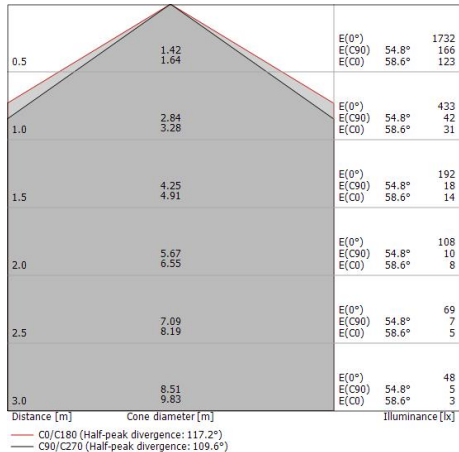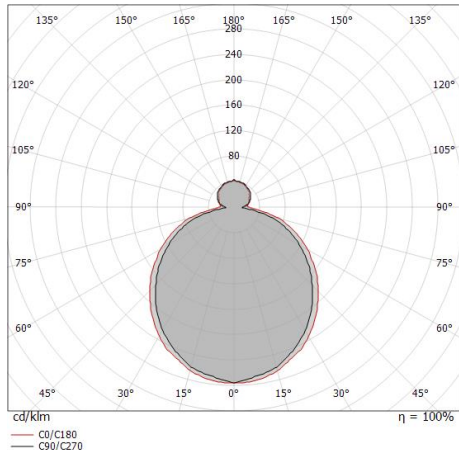

Energieeffizienzklasse	
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.	
Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	75 %
Lichtstrom (Lichtquelle)	2080 lm
Leuchten Lichtstrom	1568 lm
Consumption	23 W
Leuchten Lichtausbeute	68 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C
UGR	
UGR axial	14.3
UGR transversal	15.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C90/C270	110°
Optik C0/C180	117°
Light distribution simmetry	Symmetrical 2 assis

Mr.Magoo_S | Ceiling Downlights | Accessories
8006M



Dimmer - 0-10V, 1-10V oder DALI-Dimmschnittstelle
Bluetooth, 220-240V

Code
KIT0079