


Wandleuchten - Deckenleuchten | 220-240 V
156 topLED 26 W DC - 32 W AC | CRI 90
8008M



Technische Daten	
Designer	Mirco Crosatto
Jahr der Verwirklichung	2010
Typ	Wandleuchten - Deckenleuchten
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward and upward
Lampe Nennleistung	26 W DC
Gesamtleistung	32 W
Lichtstrom (Lichtquelle)	2923 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI-2 - PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	3.95 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PE
Farbe	Natural polyethylene

Wandleuchten - Deckenleuchten | 220-240 V | 156 topLED 26 W DC - 32 W AC | CRI 90
8008M

Double emission wall lights or ceiling downlights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 156 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2923 lm, with a 112.4 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a text white ra9003 finish, processed by means of coating; the diffuser is made of pe.

The ingress protection degree is IP40; the total weight is of 3.95 kg.

The total absorbed power is 32 W

The device features protection class I and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

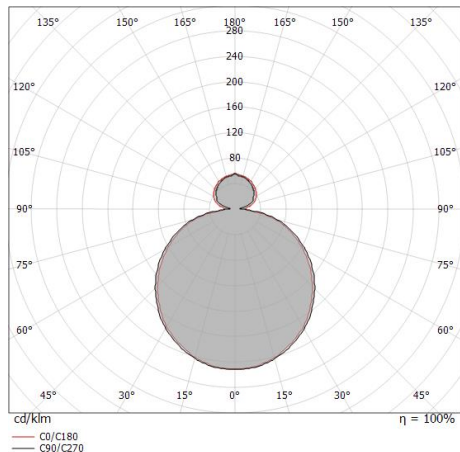


0.5	1.77 1.66	E(0°) E(C90) E(C0)	2020 121 140
1.0	3.53 3.32	E(0°) E(C90) E(C0)	505 30 35
1.5	5.30 4.97	E(0°) E(C90) E(C0)	224 13 16
2.0	7.07 6.63	E(0°) E(C90) E(C0)	126 8 9
2.5	8.84 8.29	E(0°) E(C90) E(C0)	81 5 6
3.0	10.60 9.95	E(0°) E(C90) E(C0)	56 3 4

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 117.8°)
— C90/C270 (Half-peak divergence: 121.0°)

Energieeffizienzklasse	
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.	
Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	68 %
Lichtstrom (Lichtquelle)	2923 lm
Leuchten Lichtstrom	2011 lm
Consumption	32 W
Leuchten Lichtausbeute	62 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C
UGR	
UGR axial	13.2
UGR transversal	12.9
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	118°
Light distribution simmetry	Symmetrical

Mr.Magoo_S | Ceiling Downlights | Accessories
8008M



Dimmer - 0-10V, 1-10V oder DALI-Dimmschnittstelle
Bluetooth, 220-240V

Code
KIT0079