Rubber 3D

LED Strip | topLED 10 W DC 24 V | 10 W/m
1100 Lm/m | CRI 85
80395

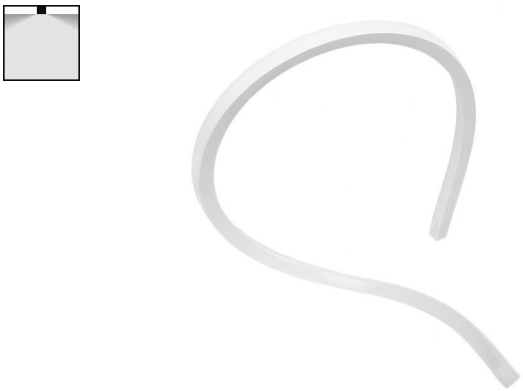

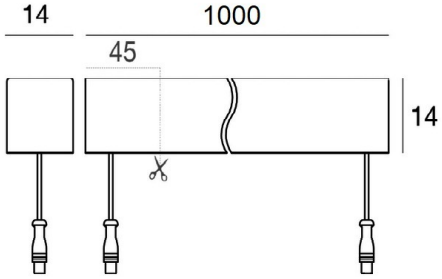

Technische Daten	
Länge	1000 mm
Minimaler Schnitt	45 mm
Typ	LED Strip
Installationsposition	Wand - Decke - Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	10 W DC
Lampenleistung / m	10 W / m
Lichtstrom (Lichtquelle)	1100 lm
Lichtstrom (Lichtquelle) / m	1100 lm / m
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	85 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP67
IK	IK07
Glühdrahtprüfung	960°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
ETL	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1(M)x0,25 m 1(F)x0,25 m
Harzbeschichtung	Ja
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.275 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Technopolymer
Farbe	Weiß

Oberfläche Oberfläche diffusor	
Material	PU
Farbe	Opal

Elektronik

99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 15 art.)

99332
1-10V Controller (1 - 15 art.)

99374
On/Off Driver 198~264V AC / 176~275V DC 75 W (1 - 7 art.)

99787
DALI Controller 100~305V AC / 142~431V DC 240 W (1 - 24 art.)

83062
DALI - Push and Simply Dim Controller 198~264V AC / V DC (1 - 15 art.)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

LED Strip | topLED 10 W DC 24 V | 10 W/m | 1100 Lm/m | CRI 85
80395

Single emission led strip for outdoor application. The warm white LED light source with a diffused light distribution is composed of 132 topled LEDs with CCT of 3000 K and a CRI 85; the source luminous flux is 1100 lm, with a 110.0 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.

The ingress protection degree is IP67; the total weight is of 0.275 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 10 W The power supply cable is included and features a 1(M)x0,25 m 1(F)x0,25 m length.

The device features protection class III and can be wall lights, ceiling or floor-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

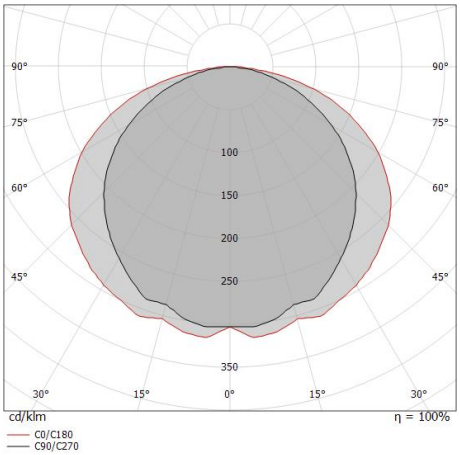

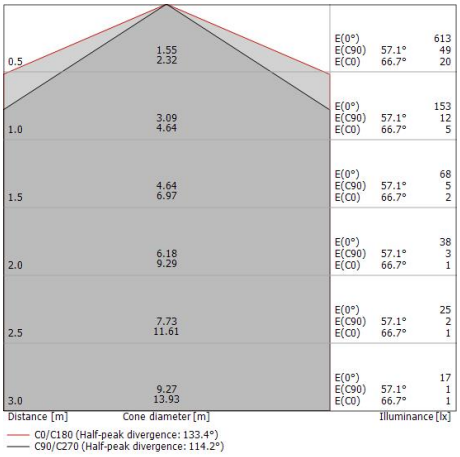

Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	46 %
Lichtstrom (Lichtquelle)	1100 lm
Leuchten Lichtstrom	506 lm
Consumption	10 W
Leuchten Lichtausbeute	50 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	85 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B20 C0 72500h

UGR	
UGR axial	24.4
UGR transversal	27.2
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	114°
Optik C0/C180	133°
Light distribution simmetry	Symmetrical 2 assis

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

LED Strip | topLED 10 W DC 24 V | 10 W/m | 1100 Lm/m | CRI 85

80395

Single emission led strip for outdoor application. The warm white LED light source with a diffused light distribution is composed of 132 topled LEDs with CCT of 3000 K and a CRI 85; the source luminous flux is 1100 lm, with a 110.0 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.

The ingress protection degree is IP67; the total weight is of 0.275 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 10 W The power supply cable is included and features a 1(M)x0,25 m 1(F)x0,25 m length.

The device features protection class III and can be wall lights, ceiling or floor-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	23 %
Lichtstrom (Lichtquelle)	1100 lm
Leuchten Lichtstrom	253 lm
Consumption	5 W
Leuchten Lichtausbeute	50 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	85 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B20 C0 72500h

UGR	
UGR axial	24.4
UGR transversal	27.2
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	114°
Optik C0/C180	133°
Light distribution simmetry	Symmetrical 2 assis

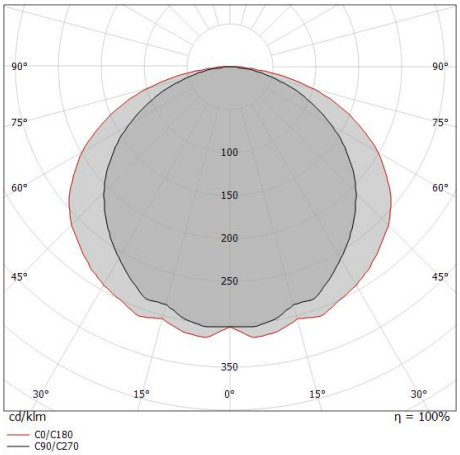

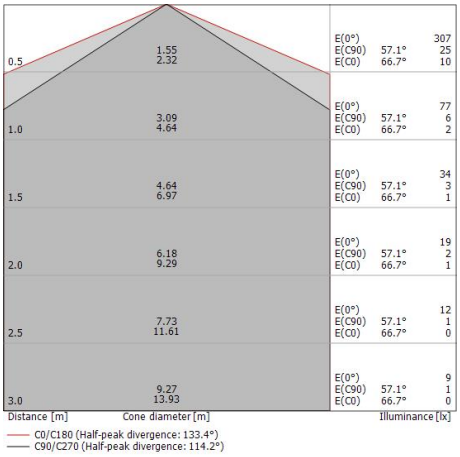

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

LED Strip | topLED 10 W DC 24 V | 10 W/m | 1100 Lm/m | CRI 85

80395

Single emission led strip for outdoor application. The warm white LED light source with a diffused light distribution is composed of 132 topled LEDs with CCT of 3000 K and a CRI 85; the source luminous flux is 1100 lm, with a 110.0 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.

The ingress protection degree is IP67; the total weight is of 0.275 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 10 W The power supply cable is included and features a 1(M)x0,25 m 1(F)x0,25 m length.

The device features protection class III and can be wall lights, ceiling or floor-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	2 %
Lichtstrom (Lichtquelle)	1100 lm
Leuchten Lichtstrom	26 lm
Consumption	0,5 W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	85 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B20 C0 72500h

UGR	
UGR axial	24.4
UGR transversal	27.2
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	114°
Optik C0/C180	133°
Light distribution simmetry	Symmetrical 2 assis

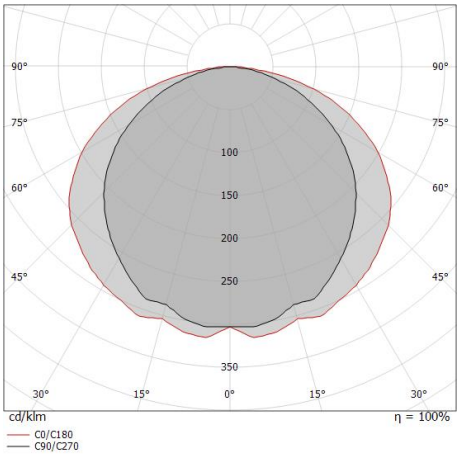

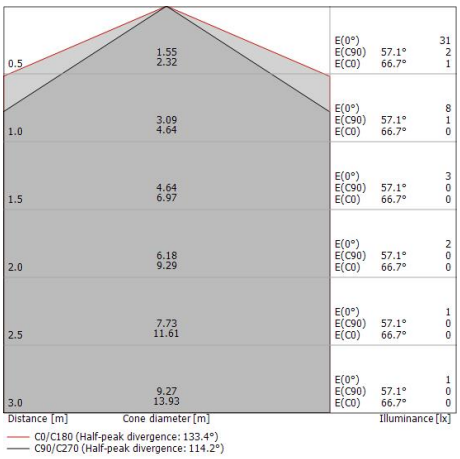

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D | LED Strip | Accessories
80395

Kabelklemme

Code
98990





Klammer - Clip mit Zahnfeder
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
99536





Klammer - Clip mit Zahnfeder mit Kabelkanal
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
99537





Klammer - Flexibles Profil
installationsposition: wand, decke L=1045mm, H=19mm, D=16.2mm.
Material:Edelstahl --, farbe:Stahl.

Code
99541



Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
C-F400003



Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-F400004



Klammer - Clip mit Zahnfeder - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
C-F400001



Klammer - Clip mit Zahnfeder - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-F400002

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D | LED Strip | Accessories
80395

Endkappe
Material:, farbe:Transparent.

Code
99539



Einbaugehäuse - Linearprofil aus Aluminium 19x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3d Pixel
installationsposition: wand, decke L=1000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
99549



Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=1000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
83034





Einbaugehäuse - Linearprofil aus Aluminium 19x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82198



Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82199

Verlängerungskabel - Verlängerungskabel 2m

Code
99688

Verlängerungskabel - Verlängerungskabel 2m

Code
99689



Profil - Lineares Weiss Pvc-Profil 19x18x2000mm für Rubber 3D PROtection
Material:Acrylnitril-Styrol-Acrylat, farbe:weiß RAL 9003.

Code
C-K100001

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D | LED Strip | Accessories
80395



Profil - Lineares Weiss Pvc-Profil 19x18x1000mm für Rubber 3D PROtection
Material:Acrylnitril-Styrol-Acrylat, farbe:weiß RAL 9003.

Code
C-K100002



Profil - Weißes lineares Profil mit hohlem Durchgang 39x19x2000mm für Rubber 3D PROtection
Material:Acrylnitril-Styrol-Acrylat, farbe:weiß RAL 9003.

Code
C-K100004



Profil - Weißes lineares Profil mit hohlem Durchgang 39x19x1000mm für Rubber 3D PROtection
Material:Acrylnitril-Styrol-Acrylat, farbe:weiß RAL 9003.

Code
C-K100005



Profil - Weißes lineares Profil mit hohlem Durchgang 39x19x50mm für Rubber 3D PROtection
Material:Acrylnitril-Styrol-Acrylat, farbe:weiß RAL 9003.

Code
C-K100006



Profil - Schwarzes Aluminium 18x19 Profil 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100007



Profil - Schwarzes Aluminium 18x19 Profil 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100008



Profil - Profil 39x19 Aluminium schwarz 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100009



Profil - Profil 39x19 Aluminium schwarz 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100010

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D | LED Strip | Accessories
80395



Profil - Flexibles Profil
Material:Stahl AISI 304, farbe:Stahl.

Code
C-K100011



Clip - Weißes pvc lineares Profil 19x18x50mm für Rubber 3D PROtection
installationsposition: wand, decke

Code
C-K100003



Dimmer - Smart_PRO CV | RF Fernbedienungs Controller WiFi – Eingang 12/24/48V – Ausgang: 3A × 4 Kanäle 12/24/48V
RF Remote controller

Code
C-E700002



Remote RF - 2.4G?RF?Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit, Ein/Aus

Code
C-W600001

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.