Downlights | 100-240 V | arrayLED 15 W DC 400 mA
CRI 92
80754W60



KIT
LED lamp + Driver





Technische Daten	
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Wide Flood
Light emission direction	frontal
Lampe Nennleistung	15 W DC
Lichtstrom (Lichtquelle)	1677 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	100 - 240 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	92 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.30 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.580 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Elektronik im Kit enthalten

LED-AL203
None On/Off Driver 100~240V AC (1 art.)
Elektrische Isolationsklasse 2





Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Downlights | 100-240 V | arrayLED 15 W DC 400 mA | CRI 92
80754W60

Single emission recessed downlights for indoor application. The warm white LED light source with a wide flood light distribution is composed of 1 arrayled LEDs with CCT of 3000 K and a CRI 92; the source luminous flux is 1677 lm, with a 111.8 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text white ral9003 finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 0.580 kg.

The total absorbed power is 16 W The power supply cable is included and features a 0.30 m length.

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Lichtstrom (Lichtquelle)	1677 lm
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	92 Ra
Gamut Area Index	59 GAI
Colour Rendering Index	56 R9
IES TM-30 Rf	91
IES TM-30 Rg	100
Black Body Locus	On
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio
L70 B10 C0 296960h (at Tj 65 Ta 25)

COLOR VECTOR GRAPHIC



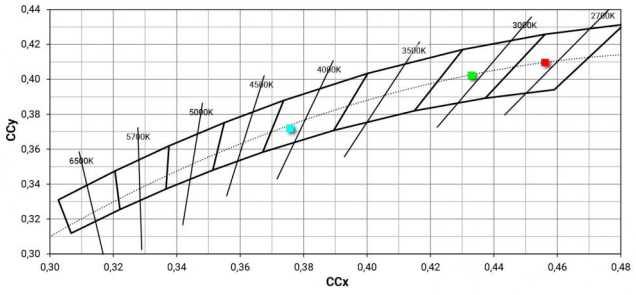

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Illuminator | Downlights | Accessories
80754W60





Einbaugehäuse - Gegenkasten für ein schwenkbares Modul
installationsposition: decke; typ installation: gipskarton L=166mm, H=136mm, D=166mm.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
99497





Einbaugehäuse - Gegenkasten für zwei schwenkbare Module
installationsposition: decke; typ installation: gipskarton L=317mm, H=136mm, D=166mm.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
99498





Einbaugehäuse - Gegenkasten für drei schwenkbare Module
installationsposition: decke; typ installation: gipskarton L=462mm, H=136mm, D=166mm.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
99499

Diffusor
Diffusorart: filtro ellittico

Code
99553





Blendschutz
Blendschutzart: wabenraster.
Material:PC, farbe:Black.

Code
99551





Blendschutz
Blendschutzart: schermo cilindrico.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
Q99555



Optik
Lichtverteilung: medium flood,Material Verkleidung: aluminium

Code
99561



Optik
Lichtverteilung: flood,Material Verkleidung: aluminium

Code
99562

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.