

Pendelleuchte | 220-240 V | 70 topLED 31 W DC - 36 W AC | CRI 90
8089

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 70 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3431 lm, with a 110.7 lm/W nominal luminous efficacy.



The device body is made of pu; the diffuser is made of pmma with a laser engravings treatment; the mounting frame is made of metal, with a text white ral9003 finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 6.06 kg.

The total absorbed power is 36 W The power supply cable is included and features a 2.2 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

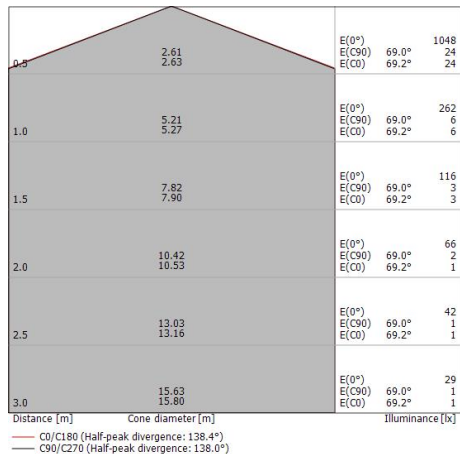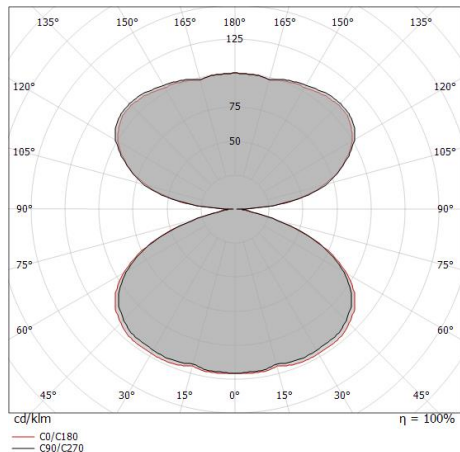

Energieeffizienzklasse	
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.	


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	63 %
Lichtstrom (Lichtquelle)	3431 lm
Leuchten Lichtstrom	2165 lm
Consumption	36 W
Leuchten Lichtausbeute	60 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio	
L70 B10 C0 100000h	
L80 B20 C0 80000h	
L90 B10 C0 60000h	

UGR	
UGR axial	12.7
UGR transversal	12.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	138°
Light distribution simmetry	Symmetrical

Oxygen_P | Pendant Luminaires | Accessories
8089



Dimmer - 0-10V, 1-10V oder DALI-Dimmschnittstelle
Bluetooth, 220-240V

Code
KIT0079