



Pendelleuchte | 220-240 V
200 topLED 42 W DC | CRI 90
8095



Technische Daten	
Designer	Pio e Tito Toso
Jahr der Verwirklichung	2016
Typ	Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward and upward
Lampe Nennleistung	42 W DC
Gesamtleistung	50 W
Lichtstrom (Lichtquelle)	4778 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI - PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2.2 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	8,100 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	PU
Farbe	Gelb/Weiß
Oberfläche Oberfläche diffusor	
Material	PMMA
Farbe	Transparent
Oberfläche Oberfläche fassung	
Material	Metall
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Pendelleuchte | 220-240 V | 200 topLED 42 W DC - 50 W AC | CRI 90
8095

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 200 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 4778 lm, with a 113.8 lm/W nominal luminous efficacy.



The device body is made of pu and features a yellow/white finish; the diffuser is made of pmma with a laser engravings treatment; the mounting frame is made of metal, with a text white ral9003 finish, processed by means of coating.

The ingress protection degree is IP20;

The total absorbed power is 50 W The power supply cable is included and features a 2.2 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

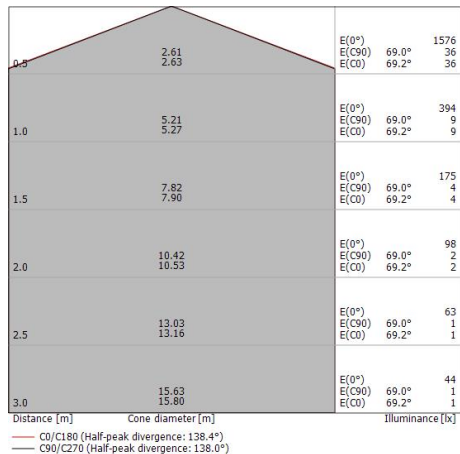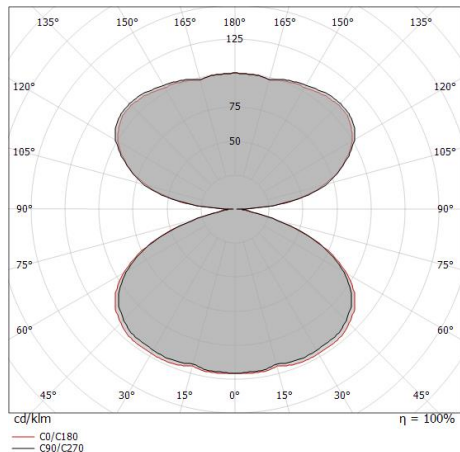

Energieeffizienzklasse	
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse F.	


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	68 %
Lichtstrom (Lichtquelle)	4778 lm
Leuchten Lichtstrom	3255 lm
Consumption	50 W
Leuchten Lichtausbeute	65 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio	
L70 B10 C0 100000h	
L80 B20 C0 80000h	
L90 B10 C0 60000h	

UGR	
UGR axial	11.6
UGR transversal	11.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	138°
Light distribution simmetry	Symmetrical

Oxygen_P | Pendant Luminaires | Accessories
8095



Dimmer - 0-10V, 1-10V oder DALI-Dimmschnittstelle
Bluetooth, 220-240V

Code
KIT0079