Downlights | 1 arrayLED 15 W DC 400 mA | CRI 80

**81265N30**





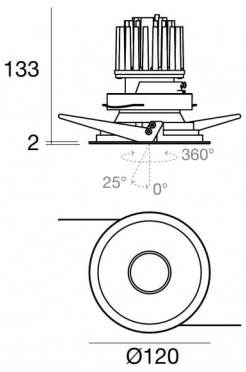


105

| Technische Daten | |
|---|---|
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | arrayLED |
| Optik | Medium Flood |
| Light emission direction | downward |
| Lampe Nennleistung | 15 W DC |
| Lichtstrom (Lichtquelle) | 2078 lm |
| Eingangsspannungsbereich | 400mA |
| Ähnlichste Farbtemperatur / Tone | 4000 K |
| Farbwiedergabeindex | 80 Ra |
| Gleichstrom/Gleichspannung | CC |
| Isolierklasse | 3 |
| IP | IP44 |
| IP optisches System | IP65 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | DALI - 1-10V |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Ja |
| Gesamtwinkel (horizontale Ebene) | 360 ° |
| Gesamtwinkel (vertikale Ebene) | 25 ° |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 0.300 m |
| Harzbeschichtung | Nein |
| Einbautiefe | 133 mm |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.480 Kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |
| Optiktechnologie | F.O.L. |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminiumlegierung 6026 |
| Farbe | Text black RAL9005 |
| Bearbeitungstyp | Pulverbeschichtung mit duroplastischen Pulvern |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | UV beständiges Polycarbonat |
| Farbe | Transparent |

| Oberfläche Oberfläche strahler | |
|---|---|
| Material | Stranggepresstes Aluminium EN AB - 46100 |
| Bearbeitungstyp | Trommelung |

**Elektronik**



99740
Multi Power 198~264V AC / 180~275V DC (1 art.)



99738
DALI - Push and Simply Dim Controller 198~264V AC / 180~275V DC (1 art.)



99739
1-10V Multi Power 198~264V AC / V DC (1 art.)



83334
Push and Simply Dim - DALI-2 Multi Power 198~264V AC / 176~280V DC (1 art.)

| Cables Electrification | |
|---|---|
| IP (locked condition) | 66 |
| Cable connector | Male Easy plug |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Downlights | 1 arrayLED 15 W DC 400 mA | CRI 80
**81265N30**

Single emission recessed downlights for indoor application. The natural white LED light source with a medium flood light distribution is composed of 1 arrayled LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 2078 lm, with a 138.5 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6026 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders; the diffuser is made of uv resistant polycarbonate.

The ingress protection degree is IP44; the total weight is of 0.480 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 15 W The power supply cable is included and features a 0.300 m length.

The device features protection class III and can be ceiling-mounted, with a 105 mm diameter hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 48 % |
| Lichtstrom (Lichtquelle) | 2078 lm |
| Leuchten Lichtstrom | 998 lm |
| Consumption | 15 W |
| Leuchten Lichtausbeute | 66 lm/W |
| Farbtemperatur | 4000 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Farbwiedergabeindex | 80 Ra |
| Gamut Area Index | 70 GAI |
| Colour Rendering Index | 14 R9 |
| IES TM-30 Rf | 82 |
| IES TM-30 Rg | 94 |
| Black Body Locus | On |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 296960h (at Tj 65  Ta 25 ) |

| UGR | |
|---|---|
| UGR axial | 13.6 |
| UGR transversal | 13.6 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C0/C180 | 36° |
| Light distribution simmetry | Symmetrical |

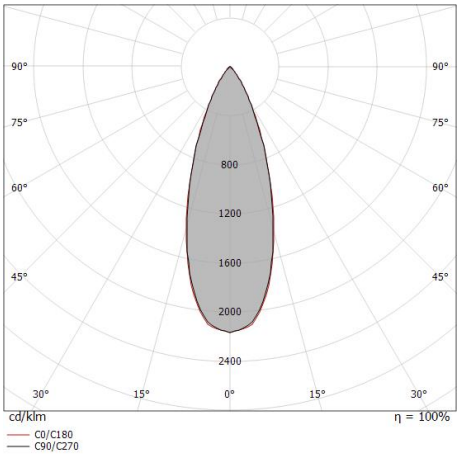


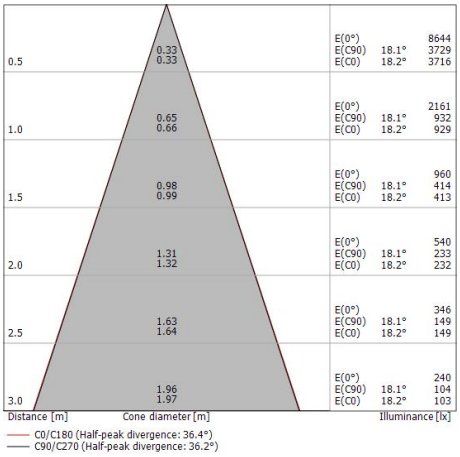





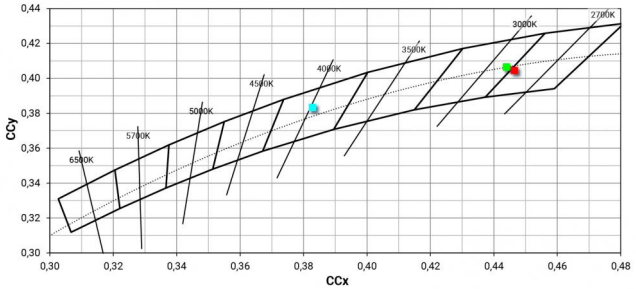




Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.