

Wandleuchten - Step-Leuchten | 85-277 V | 42 topLED 9.5 W DC - 12 W AC | CRI 80
81294W07

Single emission wall lights for outdoor application. The warm white LED light source with a asymmetric wallwasher light distribution is composed of 42 topLEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1437 lm, with a 151.3 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a text brilliant grey ral 9006 finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP65; the total weight is of 1 kg.

The total absorbed power is 12 W The power supply cable is included and features a 0.3 m length.

The device features protection class II and can be wall lights-mounted with an outer casing, code 99745(for concrete or masonry).



Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	45 %
Lichtstrom (Lichtquelle)	1437 lm
Leuchten Lichtstrom	647 lm
Consumption	12 W
Leuchten Lichtausbeute	53 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio
L70 B10 C0 494435h (at Tj 65 Ta 25)
L80 B10 C0 310287h (at Tj 65 Ta 25)
L90 B10 C0 147586h (at Tj 65 Ta 25)

OPTICAL	
Optik C0/C180	121°
Light distribution simmetry	Asymmetrical

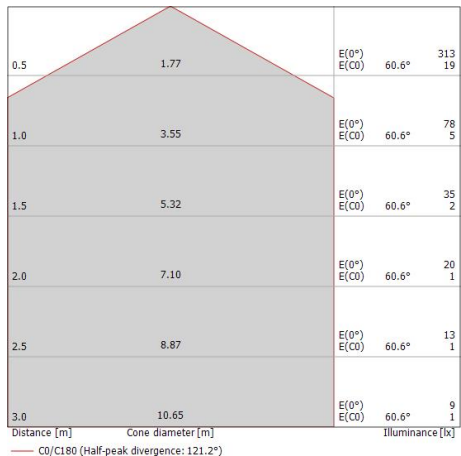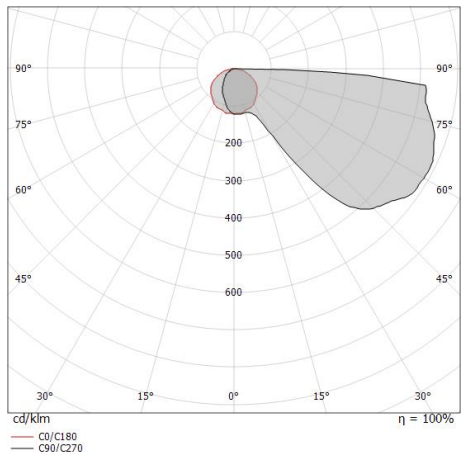

Envelope_W | Step Lights | Accessories
81294W07



Einbaugehäuse
 installationsposition: wand; typ installation: mauerwerk L=281mm, H=135mm, D=42,5mm

Code
99745